


Multifunctional Cable tracker

User Manual V1.4

(Basic/Network)

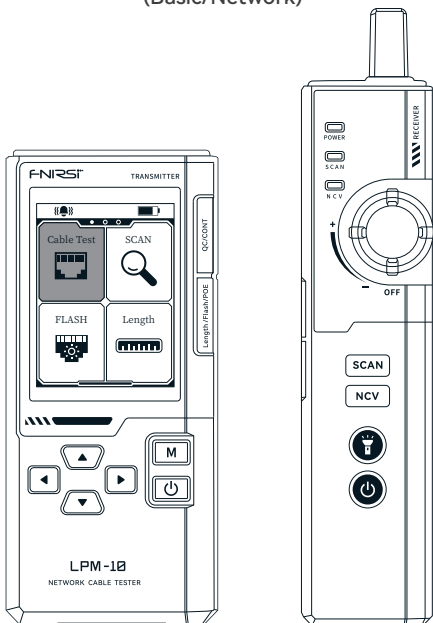

CONTENTS

1.SAFETY REQUIREMENTS	>>>	01
2.PRODUCT OVERVIEW	>>>	01
3.TECHNICAL SPECIFICATIONS	>>>	07
4.OPERATION GUIDE	>>>	09
5.QUICK START	>>>	11
6.TROUBLESHOOTING	>>>	12
7.MAINTENANCE	>>>	15
8.CONTACT US	>>>	16
9.WARRANTY INFORMATION	>>>	17
WARRANTY CARD	>>>	Last Page

1. SAFETY REQUIREMENTS

1.1 Environmental Requirements

Precautions

- Avoid high temperature, open flame, corrosive gas, humid or dusty environment to prevent equipment failure.
- When measuring, make sure that there is no debris in the connection port before connection to prevent the connection from being reduced and causing incorrect measurement results.
- Make sure the device is connected correctly. In the case of incorrect connection, the device may cause measurement errors.
- To ensure your user experience, please carefully follow the connection method in the instruction manual.
- Do not open the battery cover when measuring.

Keep away from the following items:

- Heaters: Avoid overheating or fire risks.
- Water, chemicals: Solvents: Leakage may damage the meter or cause a fire.
- Strong magnetic meters: Prevent magnetic fields from interfering with the normal operation of the meter.

Waste Disposal

Do not discard used batteries or meters with household waste. Dispose of in accordance with national or local regulations.



2. PRODUCT OVERVIEW

2.1 Product Introduction

LPM-10 is a multifunctional smart cable/wire tracker, designed for measuring and locating network cables. It plays a key role in network installation and troubleshooting. This device offers several features, including line detection, length testing, crimping check, network cable speed test, anti-interference, port flashing, cable docking, PoE power testing, non-contact voltage (NCV) detection, and a built-in flashlight. With easy operation, powerful functions, high accuracy, and wide applicability, it meets various needs in network setup, testing, and maintenance. Whether you are a network technician or manager, the LPM-10 can help you improve work efficiency, reduce difficulties, and ensure the network runs smoothly.

2.2 Product Description

- ① **LPM-10A:** RJ45 Port
- LPM-10C:** RJ45 Port / PING & IP Scanning Port
- ② **LCD display:** This area displays the function test results, color screen.
- ③ **Function indicator:** Idle is blue, error is red, and correct is green.
- ④ **Selection key area:** operation keys up, down, left, and right.
- ⑤ **Charging port :** USB Type-C Port with Reset Hole
- ⑥ **Power on/off/return key:** long press to power on, short press to execute the selected operation return key.
- ⑦ **Measurement/confirmation key:** measurement key, selection operation confirmation key.
- ⑧ **Length measurement/end flash/POE interface:** This interface is used for length test, port flash, and PoE test.
- ⑨ **Wire crimping/wire alignment interface:** This interface is used for wire crimping test and wire alignment test.
- ⑩ **Probe:** Enhance signal receiving capability, accurately locate the line position and adapt to different working environments.
- ⑪ **Lighting lamp:** Light is emitted from here.
- ⑫ **Indicator lamp:** Power indicator lamp, wire tracing signal lamp, NCV signal lamp.
- ⑬ **Sensitivity knob:** Used to adjust the wire tracing sensitivity.
- ⑭ **Headphone jack:** 3.5mm headphone jack.
- ⑮ **Receiver charging port:** USB Type-C Port with Reset Hole
- ⑯ **wire tracing button:** Switch wire tracing mode button.
- ⑰ **NCV button:** Switch NCV mode button.
- ⑱ **Flashlight button:** Turn on/off the lighting function.
- ⑲ **Power button:** Short press to turn on/ Long press to turn off the device power.
- ⑳ **RJ45 port:** Used to connect the transmitter.

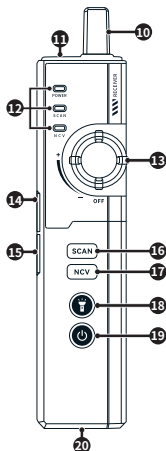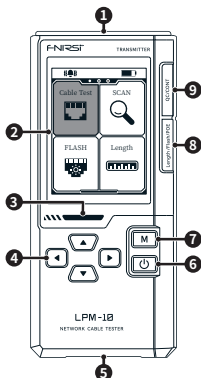


2.3 Receiver button description

Button	Operation	Function
	Short Press	Power on the receiver device
	Long Press	Power Off the receiver device
	Rotate	Turn the knob clockwise to increase the wire tracing sensitivity
寻线	Short Press	The receiver switches to the wire tracing mode
NCV	Short Press	The receiver switches to the NCV mode
	Short Press	Turn on/off the flashlight lighting

2.4 Transmitter button description

Button	Operation	Function
	Short Press	Operation Return Button
	Long Press	Device Power On/Off
	Short Press	Perform a selection operation
	Long Press	Left and right buttons wait for 1s, continuously perform selection operations, release the button to stop the operation
M	Short Press	It is the confirmation button in the operation interface. It is the measurement button in the test interface.

2.5 Multifunctional Intelligent wire tracing

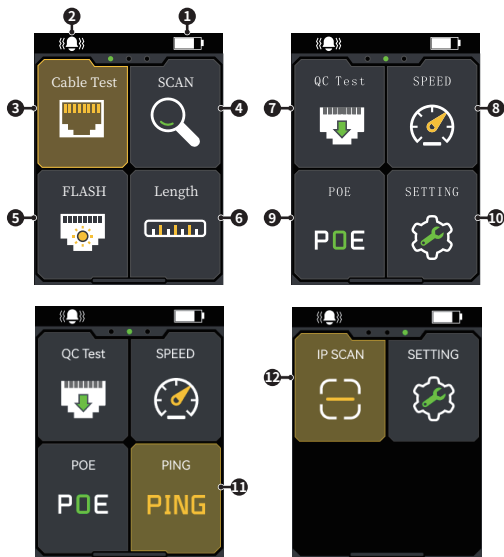

- ① Power Indicator: Indicates the system power.
- ② Volume Indicator: Indicates the on status of the device volume, and the icon disappears when the volume is turned off.
- ③ Network Cable Docking: The function is network cable docking detection, which enables fast and convenient network cable connection.
- ④ Cable/wire Tracing Measurement: The function is wire tracing, which is divided into anti-interference wire tracing and ordinary wire tracing. It is used for network cabling, detection and maintenance, and can quickly locate the target cable.


- ⑤ Port Flashing: The function is port flashing, which can quickly locate and identify the network port connected to the wire tracing.
- ⑥ Length Test: The function is a length test, which measures the propagation time of the electrical signal in the cable to calculate the length of the cable. There are three units for measurement: inches, centimeters, and meters.
- ⑦ Crimp Test: The function is a crimp test, which ensures stable and accurate transmission of network signals by detecting the electrical connection between the internal metal sheet and the core wire of the network cable.
- ⑧ Network cable speed: The network speed can be quickly measured in duplex mode.
- ⑨ POE test: The test includes: power supply line pair, switch standard, power supply mode, standard protocol, power level.
- ⑩ Settings: This function module can set language, screen brightness, volume, automatic shutdown, about (device information and restore factory settings)
- ⑪ PING Test (10C): Tests network connectivity, latency, and packet loss to quickly identify network issues.
- ⑫ IP Scan (10C): Automatically scans LAN IP addresses and devices, detects IP conflicts, and helps map the network topology.

Button	Operation	Function
 	Short Press	Operation Return Button
	Long Press	Device Power On/Off
	Short Press	Perform a selection operation
	Long Press	Left and right buttons wait for 1s, continuously perform selection operations, release the button to stop the operation

M	Short Press	It is the confirmation button in the operation interface. It is the measurement button in the test interface.
----------	-------------	---

2.6 System Settings

- ① Power Indicator: Indicates the system power.
- ② Language Settings: The left and right buttons can be set to Simplified Chinese/English.
- ③ Brightness Setting: The brightness can be set to 1~10 levels.
- ④ Volume Setting: The volume can be set to 0~10 levels.
- ⑤ Auto Shutdown: The left and right buttons can set the shutdown options: OFF, 5 minutes, 10 minutes, 15 minutes.
- ⑥ About: Display device information, and restore to factory settings through the Confirm key and the Return key.



Button	Operation	Function
	Short Press	Operation Return Button
	Long Press	Device Power On/Off
	Short Press	Perform a selection operation
	Long Press	Left and right buttons wait for 1s, continuously perform selection operations, release the button to stop the operation
M	Short Press	It is the confirmation button in the operation interface.

3.TECHNICAL SPECIFICATIONS

3.1 Model Parameters

Parameters	Product Model	
	LPM-10A	LPM-10C
Screen material	2.4-inch color screen	
Backlight	Adjustable backlight brightness	
Power supply	TYPE-C (5V/1A)	
Battery	Transmitter: 3000mAh	
	Receiver: 1500mAh	
Language	Chinese, English	
Product size	≈152×68×31mm	≈152×68×31mm

3.2 Transmitter Parameters

Function	Description	Product Model	
		LPM-10A	LPM-10C
Network cable connection test	Line interface:RJ45	✓	
	Line	✓	
	Line sequence and fault test	✓	
	Error prompt	✓	

Function	Description		Product Model	
			LPM-10A	LPM-10C
wire tracing test	Normal wire tracing		✓	
	Anti-interference wire tracing		✓	
Port flashing	Full-duplex, half-duplex	Automatic identification	✓	
	Auto-negotiation, non-auto-negotiation		✓	
Network cable rate	10M/100M/1000M		✓	
	Duplex Mode (Full Duplex, Half Duplex)		✓	
Length test	≤20m: ±1.6m 20~100m: ±2.4m ≥100m: ±3.2m		✓	
POE test	Standard and Non-standard	Automatic identification	✓	
	End Jumper/ Middle Jumper/ 8-core Power Supply		✓	
	Power Supply Mode		✓	
	Power Level		✓	
PING test	IP Connection Ping Test		✗	✓
IP scan	IP Scan		✗	✓


3.3 Receiver parameters

Receiver	Sensitivity adjustment	✓
	wire tracing method	Normal/anti-interference
	Line alignment	✓
	NCV detection function	✓
	Flashlight function	✓
	Low Battery Alert	✓
	Headphone function	✓

4. OPERATION GUIDE

4.1 Power on


- Long press the power switch of the transmitter to turn on, wait for the system to load, and enter the main interface of the multifunctional intelligent wire tracing.
- Short press the power switch of the receiver to turn on. Quickly start the device.



Main interface

4.2 Language Settings


- Short press the select button on the transmitter main interface to switch to settings, short press the M confirmation button to enter system settings, short press the left and right buttons to switch languages arbitrarily, and save and exit.

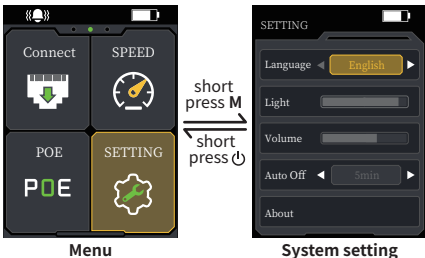

4.3 Brightness adjustment

Brightness adjustment:

After turning on the transmitter and loading the system, the screen displays the default main interface of the transmitter. Short press the selection button to switch to the system settings, and then click the **M** confirmation button to enter the system settings. The user short presses the selection button to select brightness, and then clicks the **M** confirmation button to enter the brightness setting. Use the left and right selection buttons to adjust the screen brightness, and click again to **⏻** save and exit to complete the brightness adjustment.

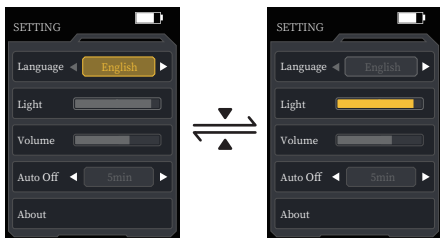

System Settings Other Function Adjustment:

The corresponding function selection and activation are roughly the same as the above operation navigation, and the step description is omitted.

5. QUICK START

5.1 Quick Measurement

- Turn on the multifunctional intelligent wire tracing, after the device is turned on, enter the system menu, select the corresponding test function, connect the interface, and start the test.
- View the measurement data on the main screen interface to quickly know the measurement results.
- Enter the system menu and select the setting function. You can set the device language, volume, screen brightness and other parameter settings.

5.2 Cable/wire Tracing Measurement

- Turn on the receiver and transmitter, enter the transmitter wire tracing function interface, there are two wire tracing methods: anti-interference wire tracing and ordinary wire tracing, select according to the actual use.

Ordinary wire tracing: search through analog signals, strong discrimination, can quickly find the target cable.

Anti-interference wire tracing: search through digital signals, less noise interference, high sensitivity.

※ It can quickly detect unshielded network cables and shielded network cables, suitable for engineering wiring, computer room maintenance, equipment update and other scenarios.

- Connect the transmitter port to the port waiting for wire tracing.
- Press the M button on the transmitter, and use the receiver to find the target line with the loudest sound in the harness, which is the target line to be found.

5.3 Port flashing

- Turn on the transmitter and connect the network cable to be tested to the end flashing interface on the side of the transmitter.
- Enter the transmitter system menu, select the function port flashing, and press the M button to enter this function.
- In the router or switch to be tested, the port indicator light connected to the test network cable will flash, accurately locating the line or port.

5.4 Length test

- Turn on the transmitter. Connect one end of the cable under test to the length test port on the side of the transmitter, and leave the other end unconnected.
- Enter the transmitter system menu and select the length test function. Use the left and right keys to select the measurement unit and press the M button to start the measurement.

- The device starts to automatically detect the line length.
- Finally, the device will display the measured length of the cable, and the length of the cable will be known after insertion.

5.5 Crimping test

- Turn on the transmitter and connect the crystal head of the cable to be tested to the crimping interface on the side of the transmitter (supports single-end).
- Enter the crimping test function to automatically determine whether the cable is crimped accurately.
- The transmitter screen will display the test results,  indicating that the crimping of the wire core is normal,  indicating that the crimping of the wire core is abnormal.
- If a pop-up window appears on the test interface, long press the right button on the crimping test interface to calibrate.

5.6 NCV test

- Turn on the receiver, press the receiver **NCV** button, and switch to NCV mode.
- Put the receiver probe close to the test wires, sockets, etc. to quickly identify live equipment.
- When the probe is close to the live equipment, the receiver speaker prompts to avoid the danger of strong electricity.

5.7 Network cable speed test

- Turn on the transmitter and connect the network cable to be tested to the end flash interface on the side of the transmitter.
- Enter the network cable speed function of the wire tracing to measure the network cable speed.
- The device uses duplex mode to measure the network cable speed to ensure the accuracy of the network cable speed.

5.8 POE test

- Turn on the transmitter and connect the device to be tested to the POE interface on the side of the transmitter.
- Enter the wire tracing POE test function to quickly identify POE devices.
- In this test, the network cable switch standard, power supply mode, standard protocol, power level, and 8-core power supply status are detected, and the detection is more comprehensive!
- ※ The receiver has a built-in flashlight function. Press the flashlight switch and turn on the lighting to experience auxiliary lighting!

5.9 Network cable docking test

- Turn on the transmitter and connect the network cable to be tested to the line interface on the side of the transmitter.
- Enter the transmitter system menu, select the function network cable docking, and press the M button to enter this function.
- Detect and calibrate the network cable sequence, short circuit, crossover, etc.

5.10 PING test (LPM-10C)

- Turn on the transmitter and connect the network cable to be tested to the PING interface on the right side of the transmitter.
- Enter the device PING test interface, which will display the local IP, destination IP, number of Ping connections and sending time. The number of sends, number of receives and number of losses are displayed at the bottom.
- In order to successfully connect the device to the detection network, the IP needs to be set. The IP address is set according to the actual device to ensure that the IP connection is correct.
- After the IP is set, you can press the M button to perform a ping test to quickly test the network rate problem.
- The device can have multiple low-power Ping servers, and can also detect the response rate. Similarly, the website response speed can also be tested.

5.11 IP Scan (LPM-10C)

- Turn on the transmitter and connect the network cable to be tested to the IP interface on the right side of the transmitter.
- Enter the device IP scanning function, set the IP, and set the IP address according to the actual situation. The scanned IP address can be one or more.
- After confirmation, press the M button to start scanning.
- After the scan is completed, the wire tracing will display the scanned IP address and complete the function.

5.12 Firmware Upgrade

- Turn off the device, press and hold the M button and the power button at the same time, and the device will pop up the firmware update interface. Insert the USB Type-c data cable to connect the computer and enter the firmware update interface to upgrade the firmware.
- After entering the firmware update, the computer recognizes the U disk and directly copies the firmware file to the U disk.
- In the firmware update interface, long press the power button to shut down.

6.TROUBLESHOOTING

6.1 Unable to boot

Possible causes:

- Battery exhausted
- Loose or damaged battery connection

Solution:

- ① Check battery charge and charge if low.
- ② If battery fails to charge or device still does not power on, try reinstalling or replacing the battery.

6.2 Screen does not display

Possible causes:

- The screen backlight is off.
- Display hardware malfunction.
- System software abnormality

Solution:

- ① Check and adjust the backlight brightness settings according to the manual.
- ② Try restarting the device to ensure the system returns to normal.
- ③ Try to disconnect the device from the power supply, disassemble the device, and reconnect the device power interface.
- ④ If the screen still does not display properly, the display may need to be repaired or replaced.

6.3 Network cable test error

Possible reasons:

- There are debris in the test interface
- Test interface aging
- System software abnormality

Solution:

- ① Clean the test interface and test again.
- ② If cleaning is ineffective, the test interface may need to be repaired and replaced.
- ③ Download the firmware upgrade file from the official website and update the system version.

7.MAINTENANCE

Cleaning the outside of the device

- Frequency:** Clean once a month, depending on the usage environment.
- Method:** Use a soft cloth to gently wipe the surface of the device. Avoid using chemical cleaners, especially those containing alcohol or strong acids or alkalis, to avoid damaging the casing or screen.
- Note:**
 - Clean the dust around the device and buttons regularly to keep the device in good condition.
 - Ensure that no liquid, dust or debris enters the device interface.

Check the battery and power:

- Battery maintenance:**For meter with built-in batteries, check the health of the battery regularly. Avoid complete battery discharge. It is recommended to charge regularly and avoid not using the device for a long time.
- Charging specifications:**Use the official charger to charge, avoid overcharging or over-discharging, and ensure that the battery is in the appropriate operating voltage range.
- Battery replacement:**If the battery shows excessive attenuation (such as failure to charge normally or extremely fast discharge), it should be replaced in time.

Storage and Carrying:

- Storage environment:** The meter should be stored in a dry and ventilated environment, avoiding high temperature, high humidity or drastic temperature changes. Avoid placing it in direct sunlight.
- Carrying:**Be careful to avoid falling when using, especially when carrying.

Software Update:

- Regularly check whether the device has new firmware to update. The latest firmware can fix known bugs and improve device performance.
- When updating, make sure the operation steps are correct, use the officially released firmware files, and avoid power outages or other interference.

Restore factory settings

- If the device is abnormal or does not work properly, try to restore the factory settings. After restoring the settings, the device will clear all custom configurations and return to the initial state.
- For methods to restore factory settings, please refer to the user manual or contact the manufacturer's customer service

8.CONTACT US

Any FNIRSI users who contact us with questions will receive our promise of a satisfactory solution, plus an extra 6-month warranty as a token of our appreciation for your support! By the way, we have created an exciting community, and we welcome you to contact FNIRSI staff to join.

SHENZHEN FNIRSI TECHNOLOGY CO.,LTD

Add.: West of Building C , Weida Industrial Park , Dalang Street , Longhua District , Shenzhen , Guangdong , China

Tel: 0755-28020752

Web: www.fnirsi.com

E-mail: business@fnirsi.com (Business)

E-mail: support@fnirsi.com (Equipment Service) <http://www.fnirsi.com/>



9.WARRANTY INFORMATION

※**This page is the basic warranty card. Please keep it.**

Thank you for choosing our company's products. The warranty period of this product starts from the date of sale. During the product warranty period, if the product is installed and used in accordance with the product manual and used in normal environment and conditions, and the fault is caused by defects in the original materials and processing, you can enjoy free repair services according to the content of this warranty clause. Please keep this warranty card properly as a warranty certificate. No reissue will be issued if it is lost.

The following situations will incur paid repair services

- ①Unable to present the original valid warranty card.
- ②Damage caused by improper installation not meeting product requirements, standards, or relevant specifications.
- ③Damage caused by accessories in the installation environment not meeting product requirements, standards, or relevant specifications.
- ④Damage caused by improper use, improper storage, unauthorized disassembly, or unauthorized repairs by the user.
- ⑤Expiration of the warranty period.

Warranty Card



Product Model	☐ LPM-10A	☐ LPM-10C	Qty.
Distributor Name (where to buy)			
Contact			
Address			
Invoice Number (Order Number)			
Purchase Date (as per invoice)	Year	Month	Day
User Name:	Address:		
			
Contact:	Fault Description:		
			



Download User Manual &
App & Software