



®

Quality and reliability is our tradition

KYORITSU



Test and Measuring Instruments
General Catalog 2025

KEW
CONNECT

What's New

Multiple Languages for catalogs and instruction manuals

Kyoritsu is expanding our support for customers by increasing our product catalogs and instruction manuals in multiple languages. In addition to English, we now offer our catalogs and instruction manuals in Spanish, French, Thai, Indonesian, Vietnamese and Arabic.

The updated multilingual materials are available from our website.

Instruction manuals



Product catalogs



New Product

KEW **6514BT**

p.64

MULTI FUNCTION INSTALLATION TESTER

- Comprehensive electrical tests required for completion inspection and maintenance are performable.
(Insulation/Voltage/Frequency/Continuity/Earth/Phase rotation/RCD tests)
- With special range dedicated for testing EV chargers, Programmable autotest function allows performing any combination of tests in sequence.



New Product Warranty Policy

Kyoritsu has started the new Product Warranty Policy that provides our customers with a three (3) year warranty from the date of purchase.

For more details, please visit our website.



SYMBOLS

	TRUE RMS
	CAT IV 600V
	DC/AC V
	DC/AC A
	DC Voltage
	AC Voltage
	DC Current (A)
	AC Current (A)
	DC+AC measurement
	MAX MIN AVG
	MAX MIN
	Resistance
	Continuity buzzer
	Diode
	Capacitance
	Temperature
	Frequency
	Decibel
	Duty cycle ratio
	Non Contact Voltage
	Backlight
	Water proof
	Memory
	Peak hold
	Data hold
	Auto power off
	Auto power save
	Output
	Filter
	Relative
	External Power Supply
	USB
	Low power Ω
	Bluetooth®

MULTIMETERS

1009, 1011/1012, 1019R, 1020R/1021R, 1030, 1051/1052, 1061/1062, 1109S, 1110, 2000A/2001A/2012RA

pp.13 to 20

CLAMP METERS

2002PA/2002R, 2003A, 2007R, 2009R, 2010, 2031, 2033, 2046R, 2055/2056R, 2117R, 2127R, 2200/2200R, 2204R, 2210R, 2300R, 2413F/2413R, 2431, 2432, 2433/2433R, 2434, 2500/2510, 8112, 8115, 8161

pp.21 to 33

INSULATION TESTERS

3005A, 3007A, 3025B/3125B, 3121B/3122B, 3123A, 3124A, 3127, 3128, 3131A, 3132A, 3161A, 3165/3166, 3431, 3551/3552/3552BT

pp.34 to 45

EARTH TESTERS

4102A/4102A-H, 4105A/4105A-H, 4105DL/4105DL-H, 4105DLBT/4105DLBT-H, 4106, 4200/4202, 4300

pp.46 to 52

LOOP/PSC/RCD TESTERS

4118A, 4140, 5406A, 5410

pp.53 to 56

PORTABLE APPLIANCE TESTERS

6205

pp.57 to 58

MULTI FUNCTION INSTALLATION TESTERS

6010B, 6011A, 6024PV, 6514BT, 6516/6516BT

pp.59 to 67

EVSE ADAPTERS

8601/8602

pp.68 to 69

POWER METERS

2060BT/2062/2062BT, 6305, 6315

pp.70 to 75

LOGGERS

5020, 5050

pp.76 to 79

SENSORS

8121/8122/8123, 8124/8125/8126/8127/8128, 8130/8133/8135, 8146/8147/8148, 8177/8178, 8309

pp.80 to 82

INTELLIGENT SOCKET TESTERS

4506, 8343

pp.83 to 85

OTHERS

5202, 5204/5204BT, 5515, 5711, 8031/8031F, 8035

pp.86 to 87

KEWTECH

KT170/171, KT200, KT203

pp.88 to 89

ACCESSORIES

Test Leads, Fuse, Case

pp.90 to 99

GLOSSARY/PRODUCT INDEX/QUALITY CONTROL CONCEPT

pp.100 to 105

ANALOG MULTIMETERS

DIGITAL MULTIMETERS

KEW 1109S 16	MODEL 1110 16	MODEL 1009 16	KEW 1011 16	KEW 1012 16	KEW 1019R 17	KEW 1020R 15	KEW 1021R 15
CE	CE	CE	CE	CE TRUE RMS	CE TRUE RMS	CE TRUE RMS	CE TRUE RMS

AC CLAMP METERS

MODEL 2002PA MODEL 2002R 24	KEW 2007R 24	MODEL 2031 24	KEW 2117R 25	KEW 2127R 25	KEW 2200/2200R 25	KEW 2204R 26
CE 2002R TRUE RMS Φ55 MAX AC2000A	CE TRUE RMS Φ33 MAX AC1000A	CE Φ24 MAX AC 200A	CE TRUE RMS Φ33 MAX AC1000A	CE TRUE RMS Φ33 MAX AC1000A	CE 2200R TRUE RMS Φ33 MAX AC1000A	CE TRUE RMS Φ70 MAX AC 400A

DIGITAL CLAMP METERS

LEAKAGE CLAMP METERS

KEW 2500/2510 29	KEW 2300R 31	KEW 2413F/2413R 31	MODEL 2431 30	MODEL 2432 30	MODEL 2433/2433R 30	MODEL 2434 31
CE Φ6	CE TRUE RMS Φ10 MAX AC/DC 100A	CE 2413R TRUE RMS Φ68 MAX AC1000A	CE Φ24 MAX AC 200A	CE Φ40 MAX AC 100A	CE 2433R TRUE RMS Φ40 MAX AC 400A	CE Φ28 MAX AC 100A

HIGH VOLTAGE INSULATION TESTERS

KEW 3121B/3122B 41	KEW 3123A 42	KEW 3124A 42	KEW 3025B/3125B 43	KEW 3127 44	KEW 3128 45
CE 3121B(2500V) 3122B(5000V)	3123A(5000/10000V)	3124A(1 to10kV Variable)	CE 3025B(250/500/1000/2500V) 3125B(250/500/1000/2500/5000V)	CE 3127(250/500/1000/2500/5000V)	CE 3128(500/1000/2500/5000/10000/12000V)

LOOP/PSC TESTERS

RCD TESTERS

PORTABLE APPLIANCE TESTER

MULTI FUNCTION INSTALLATION TESTERS

MODEL 4118A 54	KEW 4140 55	MODEL 5406A 56	KEW 5410 56	KEW 6205 58	KEW 6010B 60
CE	CE	CE	CE	CE TRUE RMS	CE

POWER METERS

LOGGERS

INTELLIGENT SOCKET TESTERS


KEW 2060BT 71	KEW 2062/2062BT 71	KEW 6305 72	KEW 6315 74	KEW 5020 76	KEW 5050 78	KEW 4506 84	KEW 8343 84
CE TRUE RMS Φ75	CE TRUE RMS Φ55	CE TRUE RMS	CE TRUE RMS	CE TRUE RMS	CE TRUE RMS	CE	CE

DIGITAL MULTIMETERS



AC CLAMP METERS

AC/DC CLAMP METERS

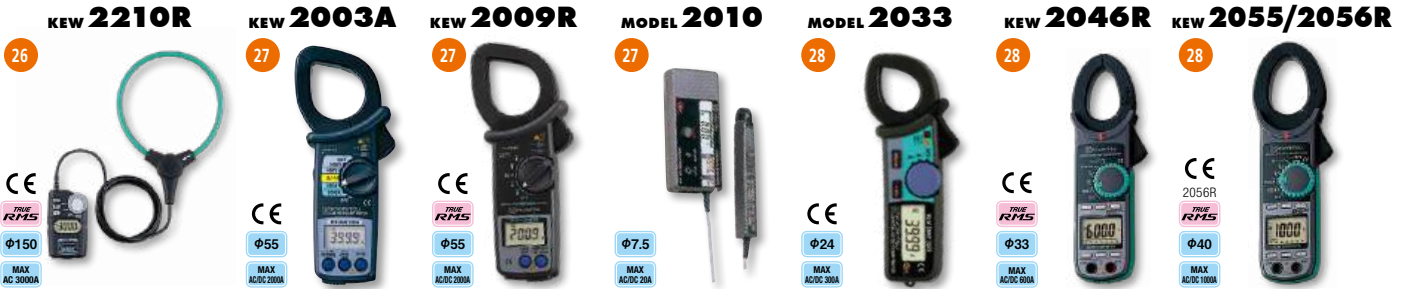

INSULATION/CONTINUITY TESTERS

ANALOG INSULATION TESTERS



EARTH TESTERS

EARTH CLAMP TESTERS



MULTI FUNCTION INSTALLATION TESTERS

EVSE ADAPTERS




OTHERS

KEWTECH



INDUSTRIAL

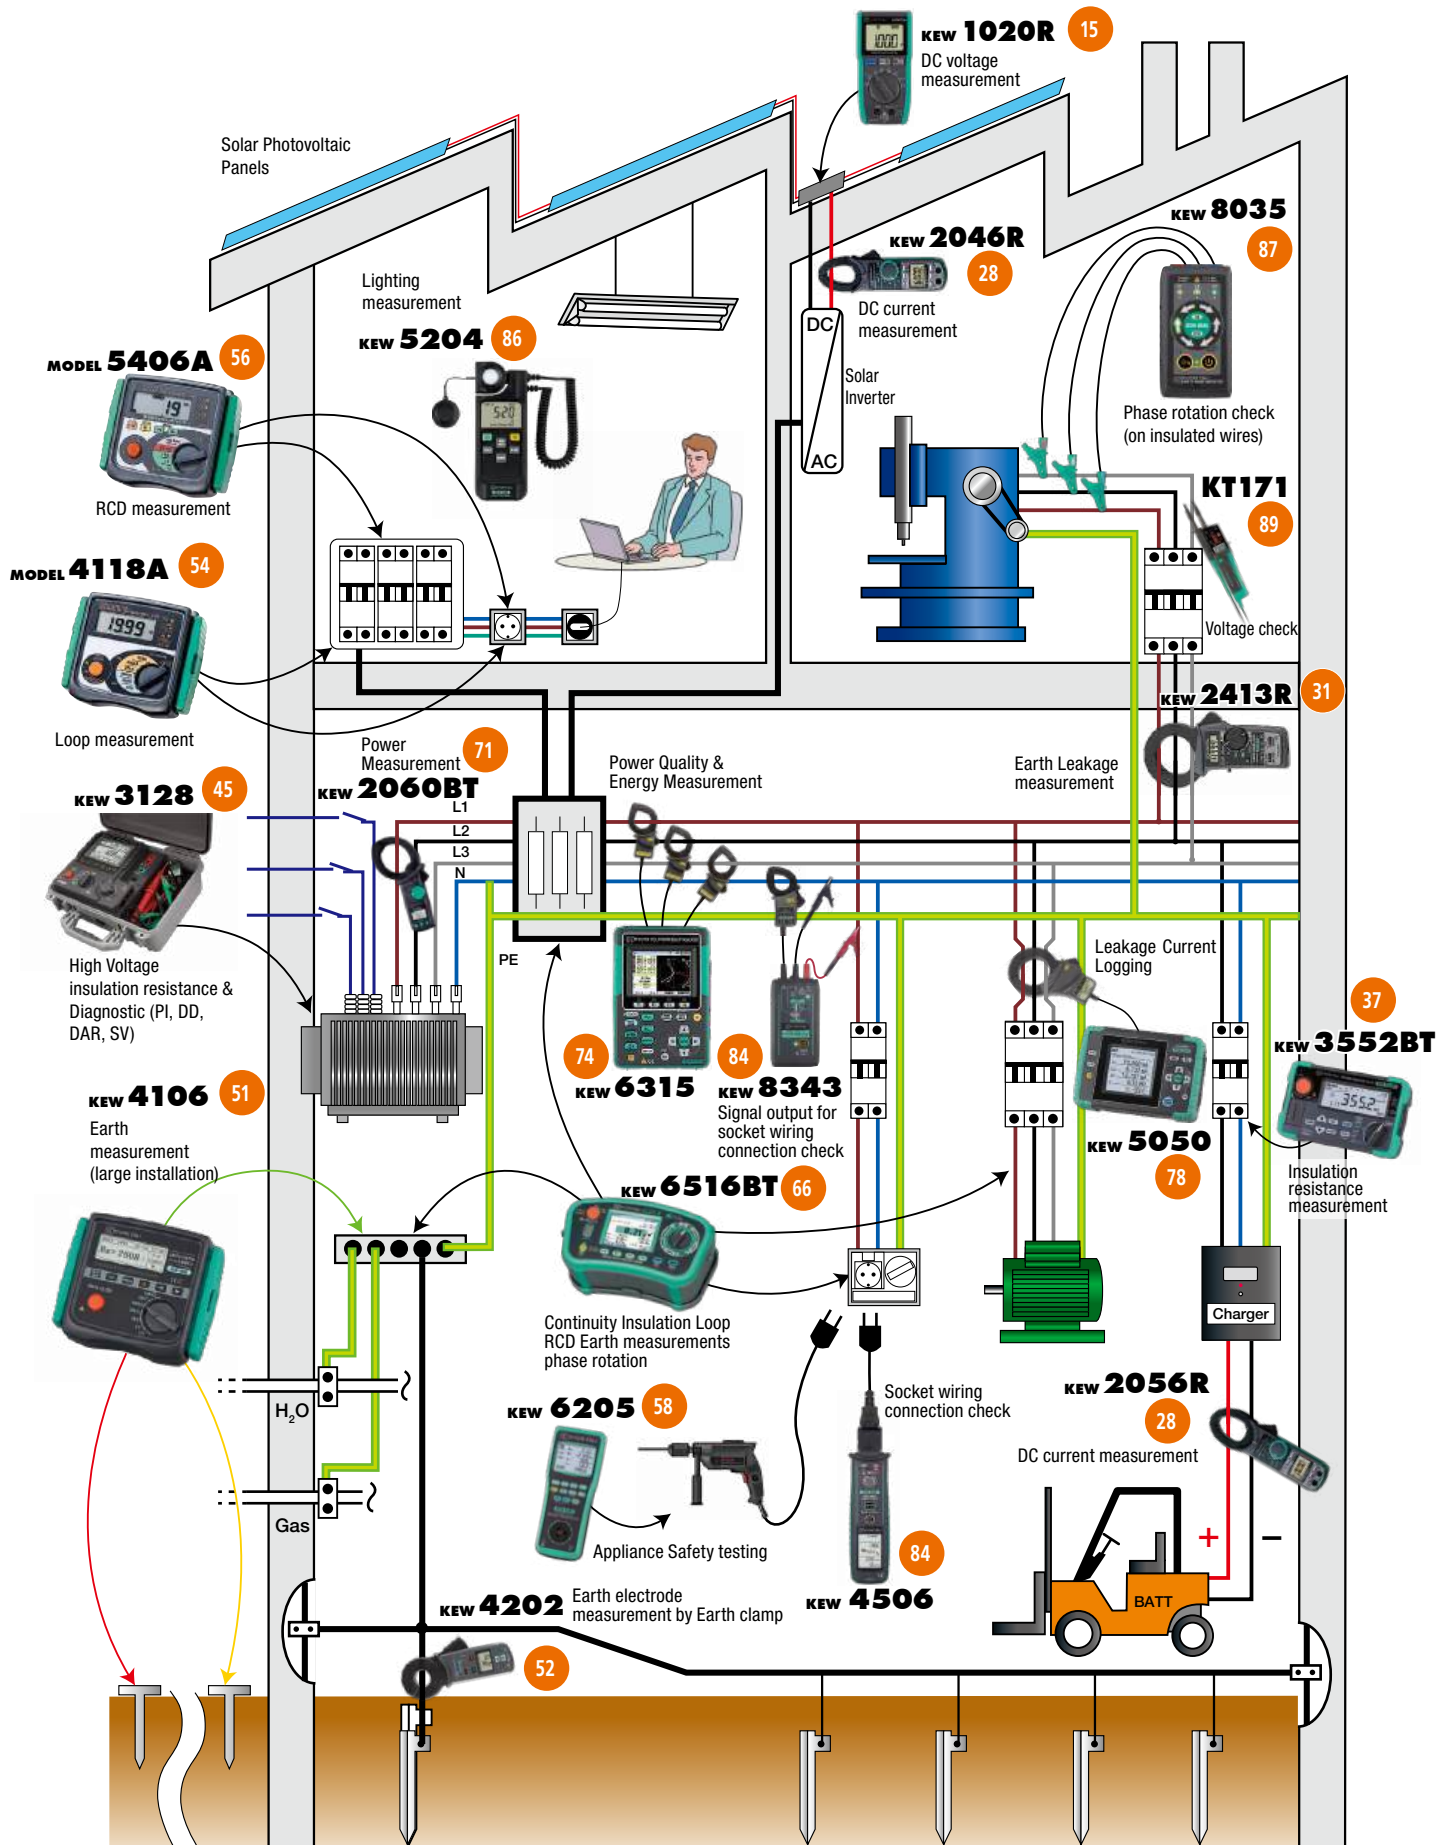

RESIDENTIAL

KEW **6024PV** 62

86

KEW **5711**
Voltage detect

DC current measurement

KEW MATE **2012RA** 20KEW **6305** 72**MODEL 3132A**


38

KEW **6514BT** 64

Voltage and Phase Neutral check

KT170

EVSE operation and safety test

KEW **8602**KEW **8343**
Signal output for socket wiring connection checkKEW **4506**
Socket wiring connection checkAppliance Safety Testing
KEW 6205KEW **2117R** 25
AC Current measurement**MODEL 2434** Earth Leakage measurement

Earth measurement

KEW 4105DL

Special measurement application “KEW CONNECT”

Do you have anything trouble
you at work?

A lot of test points and takes enormous working time.
Time consuming report creation work.
Manual input often brings typing errors.
Troublesome data input work after returning office.



((KEW))
CONNECT

solves such problems!

1

Transfers measured values to
tablet or smartphone!

2


Quick data creation!
Possible to save in CSV format to e-mail the data.



Measurement



Data transfer

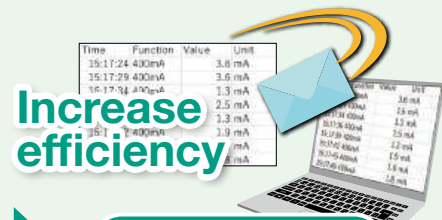

Increase
efficiency

Report creation

Models supported by KEW CONNECT:

Page



KEW Smart
Advanced



KEW **6516BT** 66
MULTI FUNCTION INSTALLATION
TESTER



KEW **6514BT** 64
MULTI FUNCTION INSTALLATION
TESTER



KEW Power*



KEW **2060BT** 71
CLAMP POWER METER



KEW **2062BT** 71
CLAMP POWER METER



KEW **3552BT** 37
DIGITAL INSULATION/CONTINUITY TESTER



KEW **5204BT** 86
DIGITAL LIGHT METER



KEW **4105DLBT** 49
KEW **4105DLBT-H**
EARTH TESTER



Detailed explanation of the application is
available on our website.



Download from Google
Play Store for FREE.



Download from App Store
for FREE.

* Please note that communication charge is incurred separately for
downloading the applications.

* Please visit our website to check the supported versions of Android™
and iOS.

Special measurement application “KEW CONNECT”




Simplified monitoring


Real-time display and measured data save function.



Real-time display and syncing data save on KEW Smart Advanced

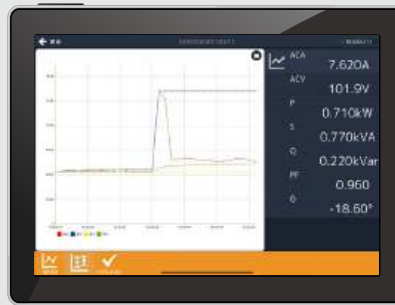

Numerical and graphical display are available on KEW Power*

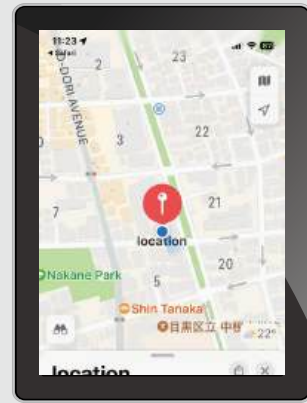

Auto-save of location info




Report creation

Measured values can be entered in the original Excel report template.


Other customized templates are importable.

Result auto entry




Measured values are automatically entered in Excel template.

Text entry



Any text is freely entered.

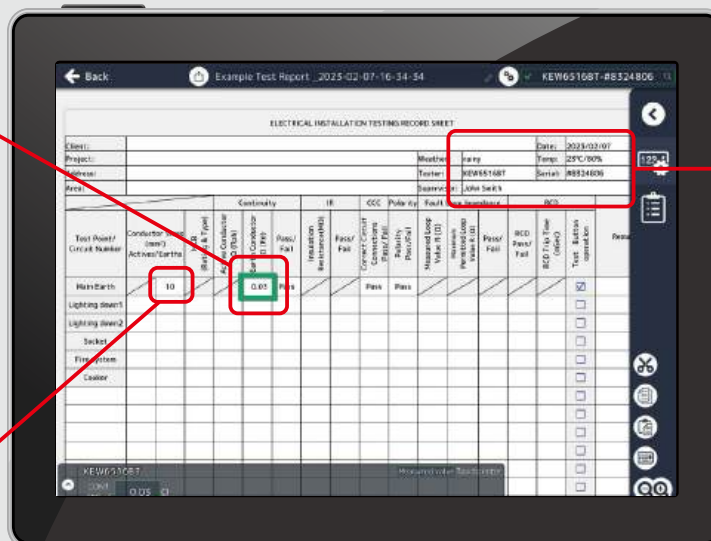

Text template




Date, paired device model name, and serial number are selectable from the fixed stocks box. Possible to add user original texts.

Upper limit change




Wishing to limit the values to be entered in the report up to 100 MΩ? Then change the record upper limit and select desired max value.

Cursor auto movement

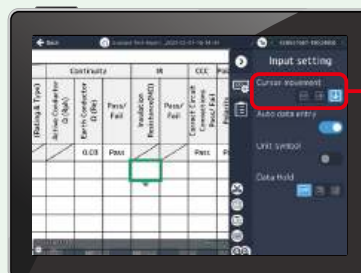

Cursor automatically moves to next cell after entering value or text. Settings of cursor move direction and movement are available.

Cursor movement

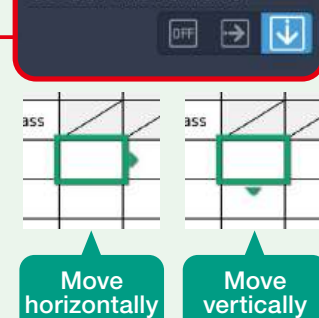

Move horizontally

Move vertically

SELECTION GUIDE

Selection Guide of Multimeters

Page **TRUE RMS** True RMS type

Analog	Basic model	1109S	16	Mirrored scale for easy and accurate reading
		1110	16	High sensitive 20kΩ/V DC
Digital	Card type	1019R	17	TRUE RMS Pocket size tester
	Pen type	1030	17	Pen type tester
	Handheld type	1009	16	Basic model
		1011	16	with Temperature measurement
		1012	16	TRUE RMS
		1020R	15	TRUE RMS CAT IV 300V, 1000V AC/DC
		1021R	15	TRUE RMS CAT IV 300V, 600V AC/DC, 10A AC/DC
		1051/1052	18	TRUE RMS DC accuracy 0.09%, PC connection *1052 only
		1061/1062	18	TRUE RMS DC accuracy 0.02%, PC connection
	With Clamp sensor KEW MATE Series	2000A	20	Conductor size φ6mm 60A AC/DC
		2001A	20	Conductor size φ10mm 100A AC/DC
		2012RA	20	TRUE RMS Conductor size φ12mm 120A AC/DC



Selection Guide of Clamp Meters

Page **TRUE RMS** True RMS type **DC AC V** AC/DC Volt.

AC current measurement	Small conductor size	2031	φ24mm	24	0.01 to 200A
		2007R	φ33mm	24	TRUE RMS DC AC V 0.1 to 1000A
	Medium conductor size	2117R	φ33mm	25	TRUE RMS DC AC V 0.01 to 1000A, Non Contact Voltage
		2127R	φ33mm	25	TRUE RMS DC AC V 0.01 to 1000A, Peak hold, Backlight
		2200	φ33mm	25	DC AC V 0.01 to 1000A
		2200R	φ33mm	25	TRUE RMS DC AC V 0.01 to 1000A
	Large conductor size	2002PA	φ55mm	24	DC AC V 0.1 to 2000A
		2002R	φ55mm	24	TRUE RMS DC AC V 0.1 to 2000A
	Flexible type	2204R	φ70mm	26	TRUE RMS 0.001 to 400A
		2210R	φ150mm	26	TRUE RMS 0.01 to 3000A



AC/DC current measurement	Small conductor size	2010	φ7.5mm	27	0.1mA to 20A AC / 0.001 to 20A DC
		2300R	φ10mm	31	TRUE RMS 0.1 to 100A AC/DC Open jaw
		2033	φ24mm	28	0.01 to 300A AC/DC
	Medium conductor size	2046R	φ33mm	28	TRUE RMS DC AC V 0.1 to 600A AC/DC
		2055	φ40mm	28	DC AC V 0.1 to 1000A AC/DC
		2056R	φ40mm	28	TRUE RMS DC AC V 0.1 to 1000A AC/DC
	Large conductor size	2003A	φ55mm	27	DC AC V 0.1 to 2000A AC/DC
		2009R	φ55mm	27	TRUE RMS DC AC V 0.1 to 2000A AC/DC



DC MILLIAMPER CLAMP METER/ CLAMP LOGGER	Small conductor size	2500	φ6mm	29	0.01 to 120.0mA DC, 4 to 20mA (%)
		2510	φ6mm	29	0.01 to 120.0mA DC, 4 to 20mA (%), Memory function, Bluetooth communication function

SELECTION GUIDE

Selection Guide of Clamp Meters

Page **TRUE RMS** True RMS type

Leakage current measurement

Small conductor size

2431 ϕ 24mm 30 0.01mA to 200A

Medium conductor size

2434 ϕ 28mm 31 0.1mA to 100A

2432 ϕ 40mm 30 0.001mA to 100A High sensitive model

2433 ϕ 40mm 30 0.01mA to 400A

2433R ϕ 40mm 30 **TRUE RMS** 0.01mA to 400A

Large conductor size

2413F ϕ 68mm 31 0.1mA to 1000A

2413R ϕ 68mm 31 **TRUE RMS** 0.1mA to 1000A



Selection Guide of Insulation/Continuity Testers



photo : 3552BT

Type	Range	MODEL	Page	Rated voltage											
				15V	50V	100V	125V	250V	500V	1000V	2500V	5000V	1k to 10kV	10kV	12kV
Analog	1 range	3165	39	-	-	-	-	-	●	-	-	-	-	-	-
	1 range	3166	39	-	-	-	-	-	-	●	-	-	-	-	-
	2 ranges	3161A	39	●	-	-	-	-	●	-	-	-	-	-	-
	3 ranges	3131A	38	-	-	-	-	●	●	●	-	-	-	-	-
	3 ranges	3132A	38	-	-	-	-	●	●	●	-	-	-	-	-
	3 ranges	3431	39	-	-	-	-	●	●	●	-	-	-	-	-
Digital	3 ranges	3005A	36	-	-	-	-	●	●	●	-	-	-	-	-
	3 ranges	3007A	36	-	-	-	-	●	●	●	-	-	-	-	-
	6 ranges	3551	37	-	●	●	●	●	●	●	-	-	-	-	-
	6 ranges	3552	37	-	●	●	●	●	●	●	-	-	-	-	-
	6 ranges	3552BT	37	-	●	●	●	●	●	●	-	-	-	-	-
High Voltage	1 range	3121B	41	-	-	-	-	-	-	-	●	-	-	-	-
	1 range	3122B	41	-	-	-	-	-	-	-	-	●	-	-	-
	2 ranges	3123A	42	-	-	-	-	-	-	-	-	●	-	●	-
	Variable	3124A	42	-	-	-	-	-	-	●	-	-	●	-	-
	4 ranges	3025B	43	-	-	-	-	●	●	●	●	-	-	-	-
	5 ranges	3125B	43	-	-	-	-	●	●	●	●	●	-	-	-
	5 ranges	3127	44	-	-	-	-	●	●	●	●	●	-	-	-
	6 ranges	3128	45	-	-	-	-	-	●	●	●	●	-	●	●

Selection Guide of Earth Testers

Page

3-Pole method 2-Pole method

Analog

4102A 50 Soft case model

4102A-H 50 Hard case model

Digital

4105A 50 Soft case model

4105A-H 50 Hard case model

4105DL 48 Soft case model, IP67 Waterproof

4105DL-H 48 Hard case model, IP67 Waterproof

4105DLBT 49 Soft case model, IP67 Waterproof, Bluetooth communication function

4105DLBT-H 49 Hard case model, IP67 Waterproof, Bluetooth communication function

4106 51 Earth resistivity model



Earth clamp

Digital

4200 52 For Multiple Earthing system

4202 52 For Multiple Earthing system, Bluetooth communication function

2-Pole method

Digital

4300 51 Dedicated earth tester for 2-Pole method

SELECTION GUIDE

Selection Guide of Multi Function InstallationTesters

Page

Digital

6010B	60	5 in 1
6011A	61	5 in 1
6024PV	62	PV Insulation, Insulation, Earth resistance, Voltage
6514BT	64	13 in 1, EVSE dedicated test function, Bluetooth communication function
6516	66	12 in 1
6516BT	66	12 in 1, Bluetooth communication function



Selection Guide of Power Meters

Page

Clamp Power Meter

2060BT	φ75mm	71	Voltage, Current, Power, Frequency, Harmonics, 4ch, Bluetooth communication function
2062	φ55mm	71	Voltage, Current, Power, Frequency, Harmonics, 4ch
2062BT	φ55mm	71	Voltage, Current, Power, Frequency, Harmonics, 4ch, Bluetooth communication function

Power Meter

6305	72	Energy, Voltage, Current, Power, 6ch, USB, Bluetooth communication function
-------------	----	---

Power Quality Analyzer

6315	74	Power quality, Energy, Voltage, Current, Power, Frequency, 7ch, USB, Bluetooth communication function
-------------	----	---

Selection Guide of Loggers

Page

For Current/Voltage

5020	76	For Current/Voltage, Swell, Dip, Interruption, Inrush current, 3ch
-------------	----	--

For Ior

5050	78	Ior Leakage current, Current, Voltage, Frequency, 5ch
-------------	----	---

Selection Guide for Other Testers

Page

LOOP/PSC Tester

4118A	54	15mA LOOP test, PSC Test, IP54 Rainproof
4140	55	ATT (Anti-Trip Technology), PSC Test, PFC Test



RCD Tester

5406A	56	Test current up to 500mA, RCD Type A and AC, Operating voltage up to 253V, IP54 Rainproof
5410	56	Test current up to 500mA, RCD Type AC, Operating voltage up to 440V, IP54 Rainproof



Portable Appliance Tester

6205	58	Class I Test, Class II Test, Extension Lead Test, RCD Test
-------------	----	--

Intelligent socket tester N-E Polarity Tester

4506	84	2-Pole/3-Pole socket, Polarity and Wiring test, N-E Loop resistance test
-------------	----	--

Light Meter

5202	86	0.1 to 19990lx
5204	86	0.1 to 199900lx
5204BT	86	0.1 to 199900lx, Bluetooth communication function



Infrared Thermometer

5515	87	-32 to 535°C
-------------	----	--------------

Voltage Detector

Low voltage

5711	86	20 to 1000V AC, LED light
-------------	----	---------------------------

Phase Indicator

Non-Contact type

8035	87	Safe measurement over insulated cables, 70 to 1000V AC
-------------	----	--

Contact type

8031	87	Phase Indicator with open phase checker
8031F	87	Phase Indicator with fused test leads















MULTIMETERS



MULTIMETERS

Selection Guide of Multimeters

		Analog Multimeters			Digital Multimeters								
		1109S	1110	1019R	1020R	1021R	1030	1009	1011 1012	1051 1052	1061 1062	2000A 2001A	2012RA
Appearance													
Detection method		—	—	✓	✓	✓	—	—	✓ (1012)	✓	✓	—	✓
Maximum count display		—	—	6000	6000	6000	4000	3999	6000	6000	50000	3400	6000
DC Basic accuracy		±3% of FS	±3% of FS	0.8%	0.5%	0.5%	0.8%	0.6%	0.5%	0.09%	0.02%	1.5%	1.0%
Frequency response		30Hz to 20kHz	50Hz to 5kHz	45 to 500Hz	40 to 500Hz	40 to 500Hz	50 to 400Hz	50 to 400Hz	40Hz to 1kHz	40Hz to 1kHz	10Hz to 20kHz(1061) 10Hz to 100kHz(1062)	50 to 400Hz	45 to 400Hz
Measurement													
DC V	Max	1000V	600V	600V	1000V	600V	600V	600V	600V	1000V	1000V	600V	600V
	Resolution	0.002V	0.005V	0.1mV	0.1mV	0.1mV	0.1mV	0.1mV	0.1mV	0.1mV	0.001mV	0.1mV	0.1mV
AC V	Max	1000V	600V	600V	1000V	600V	600V	600V	600V	1000V	1000V	600V	600V
	Resolution	0.2V	0.2V	0.001V	0.1mV	0.1mV	0.001V	0.1mV	0.001V	0.1mV	0.01mV(1061) 0.001mV(1062)	0.001V	0.001V
DC A		250mA	300mA	—	—	10A	—	10A	10A	10A	10A	60A(2000A) 100A(2001A)	120A
AC A		—	—	—	—	10A	—	10A	10A	10A	10A	60A(2000A) 100A(2001A)	120A
DC+AC		—	—	—	—	—	—	—	—	—	✓	—	—
Resistance		20MΩ	300KΩ	40MΩ	40MΩ	40MΩ	40MΩ	40MΩ	60MΩ	60MΩ	50MΩ	34MΩ	60MΩ
Continuity buzzer		—	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Battery test		—	✓	—	—	—	—	—	—	—	—	—	—
Diode test		—	—	—	✓	✓	✓	✓	✓	✓	✓	—	✓
Capacitance		—	—	600μF	1000μF	1000μF	100μF	100μF	4000μF	1000μF	50mF	—	40μF
Frequency		—	—	—	ACV 99.99kHz	ACA 9.999kHz ACV 99.99kHz	200kHz	10MHz	10MHz	99.99kHz	99.99kHz	ACA 10kHz ACV 300kHz	ACA 400Hz ACV 300kHz
Duty cycle ratio		—	—	—	✓	✓	✓	✓	✓	—	✓	—	—
Temperature		—	✓	—	—	—	—	—	✓ (1011)	✓	✓	—	—
Decibel		✓	—	—	—	—	—	—	—	—	✓	—	—
Low power-Ω		—	—	—	—	—	—	—	—	—	✓ (1062)	—	—
Function													
Dual display		—	—	—	—	—	—	—	—	✓	✓	—	—
Bar graph		—	—	—	—	—	—	—	✓	✓	✓	✓	✓
Backlight		—	—	—	✓	✓	✓	—	—	✓	✓	—	—
Data hold		—	—	—	✓	✓	✓	✓	✓	✓	✓	✓	✓
Auto hold		—	—	—	—	—	—	—	—	✓	✓	—	—
Peak hold		—	—	—	—	—	—	—	—	—	✓ (1062)	—	—
Max/Min/Avg		—	—	—	✓ (No Avg)	✓ (No Avg)	—	—	✓ (No Avg)	✓ (1052)	✓	—	—
Relative		—	—	✓	✓	✓	✓	✓	✓	✓	✓	—	—
Manual memory		—	—	—	—	—	—	—	—	✓ (1052)	✓	—	—
Logging memory		—	—	—	—	—	—	—	—	✓ (1052)	✓	—	—
Communication		—	—	—	—	—	—	—	—	✓ (1052)	✓	—	—
Other													
Operating temperature		0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	-10 to 55°C	-20 to 55°C	0 to 40°C	0 to 40°C
Measurement categories		—	CAT III 300V CAT II 600V	CAT III 300V CAT II 600V	CAT IV 300V CAT III 600V CAT II 1000V	CAT IV 300V CAT III 600V	CAT III 600V	CAT III 300V	CAT III 300V CAT II 600V	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT III 300V CAT II 600V	CAT III 300V CAT II 600V
Power source		R6 × 2, 6F22 × 1	R6 × 2	CR2032 × 1	R03 × 2	R03 × 2	LR44 × 2	R6 × 2	R6 × 2	R6 × 4	R6 × 4	R03 × 2	R03 × 2
Dimension (L)×(W)×(D)mm		150×100×47	140×94×39	126×85×18	155×75×40*2	155×75×35*1 155×75×40*2	190×39×31	161×82×50	161×82×50	192×90×49	192×90×49	128×84×24(2000A) 128×92×27(2001A)	128×92×27
Weight(Approx.)		330g	280g	135g	250g	250g	100g	280g	290g	560g	560g	210g(2000A) 220g(2001A)	220g
Accessories	Test leads	7066A	7066A	—	7066A	7066A	—	7066A	7066A 8216(1011)	7220A	7220A	—	—
	Fuse	8901 × 2	8923 × 2	—	—	8919 × 1	—	8919 × 1 8923 × 1	8918 × 1 8919 × 1	8926 × 1 8927 × 1	8926 × 1 8927 × 1	—	—
	Case	—	9103	9188	—	9097	9130	—	—	—	—	—	—

*1 With flat-type holder

*2 With wing-type holder

MULTIMETERS

Video



KEW 1020R/1021R



CE photo : 1020R



CE photo : 1021R



- Accurate reading with True RMS
- Large display with 6000 counts and Backlight
- MIN/MAX function
- Rugged and reliable
- Enhanced current measuring function using an external clamp sensor
- Sensor mode (with clamp sensor)
- Ergonomic design
- Safety standard IEC 61010-1 CAT IV 300V / CAT III 600V (1020R and 1021R) / CAT II 1000V (1020R)

	1020R	1021R
DC V	6.000/60.00/600.0/1000V(Auto-ranging) ±0.5%rdg±3dgt(6/60/600V) ±0.8%rdg±3dgt(1000V)	6.000/60.00/600.0V(Auto-ranging) ±0.5%rdg±3dgt
DC mV	600.0mV ±1.5%rdg±3dgt	
DC Clamp Sensor	60.00/200.0A(Auto-ranging) ±1.5%rdg±3dgt + Sensor accuracy	
AC V	6.000/60.00/600.0/1000V(Auto-ranging) ±1.0%rdg±3dgt [40 to 500Hz] (6/60/600V) ±1.3%rdg±3dgt [40 to 500Hz] (1000V)	6.000/60.00/600.0V(Auto-ranging) ±1.0%rdg±3dgt [40 to 500Hz]
AC mV	600.0mV ±2.0%rdg±3dgt [40 to 500Hz]	
AC Clamp Sensor	60.00/200.0A(Auto-ranging) ±2.0%rdg±3dgt + Sensor accuracy [40 to 500Hz]	
DC A	-	6.000/10.00A(Auto-ranging) ±1.5%rdg±3dgt
AC A	-	6.000/10.00A(Auto-ranging) ±1.5%rdg±3dgt [40 to 500Hz]
Ω	600.0Ω/6.000/60.00/600.0kΩ/6.000/40.00MΩ (Auto-ranging) ±0.5%rdg±5dgt(600Ω), ±0.5%rdg±2dgt(6/60/600kΩ/6MΩ), ±1.5%rdg±3dgt(40MΩ)	
Continuity buzzer	600Ω (Buzzer sounds below 90Ω)	
Diode test	Open circuit voltage:<3.0V	
Capacitance	60.00/600.0nF/6.000/60.00/600.0/1000μF ±2.0%rdg±5dgt(60/600nF), ±5%rdg±5dgt(6/60/600/1000μF)	
Frequency	ACV 99.99/999.9Hz/9.999/99.99kHz ±0.1%rdg±3dgt ACA 99.99/999.9Hz/9.999kHz ±0.1%rdg±3dgt*	
DUTY	10.0 to 90.0% ±1.0%rdg±3dgt [50/60Hz]	
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V / CAT II 1000V *2 Pollution degree 2, IEC 61010-2-033, IEC 61010-031 IEC 61326-2-2(EMC), IEC 60529(IP40)	
Power source	R03(AAA)(1.5V) × 2	
Dimension	155(L) × 75(W) × 40(D) mm (with Wing-type holder)	
Weight	Approx. 250g (including batteries and Wing-type holder)	
Accessories	Wing-type holder 7066A(Test leads) Batteries, Instruction manual	Wing-type holder, Flat-type holder, 7066A(Test leads) 9097(Carrying case), 8919(Fuse[10A/600V]) × 1(included) Batteries, Instruction manual
Optional accessories	7234(Alligator clip), 8161(AC Clamp sensor), 8115(AC/DC Clamp sensor), 9189(Magnet hanger strap)	

*1 1021R only *2 1020R only

Accessories



Optional accessories



MULTIMETERS



MODEL 1009

DC V AC V Ω \bullet \rightarrow \leftarrow
Hz DUTY DATA HOLD REL AUTO POWER OFF

- Display : 3999 counts
- Auto-ranging and manual ranging selector provided (with range hold feature)
- Resistance range provides audible continuity test
- Automatically turns power off in about 30 minutes to conserve battery life
- Direct current measurement up to 10A AC and DC

CE



KEW 1011/1012

1012 1011
DC V AC V Ω \bullet \rightarrow \leftarrow
Hz DUTY $^{\circ}\text{C}$ DATA HOLD MAX/MIN
REL AUTO POWER OFF

- 6040 counts with Bar Graph display
- MIN/MAX function enables to record min & max value
- REL (relative value) function
- Temperature measurement, selectable for $^{\circ}\text{C}$ and $^{\circ}\text{F}$ (1011 only)
- True RMS can measure and indicate distorted waveforms (1012 only)
- DUTY measurement function

CE

photo : 1012

	1009	1011	1012
DC V	400mV/4/40/400/600V $\pm 0.6\% \text{rdg} \pm 4 \text{dgt}^{\ast 1}$	600.0mV/6.000/60.00/600.0/600V $\pm 0.5\% \pm 2 \text{dgt}^{\ast 1}$	
AC V	400mV/4/40/400/600V $\pm 1.3\% \text{rdg} \pm 4 \text{dgt}^{\ast 1}$	6.000/60.00/600.0/600V $\pm 1.0\% \pm 3 \text{dgt}^{\ast 1}$	6.000/60.00/600.0/600V $\pm 1.2\% \pm 3 \text{dgt}^{\ast 1}$
DC A	400/4000 μA /40/400mA/4/10A $\pm 1.0\% \text{rdg} \pm 4 \text{dgt}^{\ast 1}$	600/6000 μA /60/600mA/6/10A $\pm 1.2\% \pm 3 \text{dgt}^{\ast 1}$	
AC A	400/4000 μA /40/400mA/4/10A $\pm 2.0\% \text{rdg} \pm 4 \text{dgt}^{\ast 1}$	600/6000 μA /60/600mA/6/10A $\pm 1.5\% \pm 4 \text{dgt}^{\ast 1}$	
Ω	400/4/40/400k/4/40M Ω $\pm 1.0\% \text{rdg} \pm 4 \text{dgt}$	600/6/60/600k/6/60M Ω $\pm 1.0\% \pm 2 \text{dgt}^{\ast 1}$	
Continuity buzzer	0 to 400 Ω (Buzzer sounds below 100 Ω)	0 to 600 Ω (Buzzer sounds below 100 Ω)	
Diode test	1.5V open circuit voltage : Approx. 0.4mA test current	2.8V open circuit voltage : Approx. 0.4mA test current	
Capacitance test	40/400nF/4/40/100 μF	40/400nF/4/40/4000 μF	
Frequency	5.12/51.2/512Hz/5.12/51.2/512kHz/5.12/10MHz	10/100/1000Hz/10/100/1000kHz/10MHz	
DUTY	0.1 to 99.9% (Pulse width/Pulse period) $\pm 2.5\% \pm 5 \text{dgt}$	0.1 to 99.9% (Pulse width/Pulse period) $\pm 2.0\% \pm 2 \text{dgt}$ (to 10kHz)	
Temperature	-	-50 to 300 $^{\circ}\text{C}$ (-58 to 572 $^{\circ}\text{F}$) (with the use of Temperature probe 8216)	-
Applicable standards	IEC 61010-1 CAT III 300V, IEC 61326-1	IEC 61010-1 CAT III 300V / CAT II 600V, IEC 61326	
Power source	R6(AA)(1.5V) \times 2 (Auto power off : Approx. 30 minutes)	R6(AA)(1.5V) \times 2 (Auto power off : Approx. 15 minutes)	
Dimension	161(L) \times 82(W) \times 50(D)mm	161(L) \times 82(W) \times 50(D)mm	
Weight	Approx. 280g	Approx. 290g	
Accessories	7066A (Test leads), 8919 (Fuse [10A/600V]) \times 1 (included), 8923 (Fuse [0.5A/600V]) \times 1 (included), Batteries, Instruction manual	7066A (Test leads), 8216 (K-type temperature probe) ² , 8918 (Fuse [0.8A/600V]) \times 1 (included), 8919 (Fuse [10A/600V]) \times 1 (included), Batteries, Instruction manual	
Optional accessories	7234 (Alligator clip), 9095 (Carrying case)		

^{\ast 1} Basic accuracy : For the detailed accuracy, please see our product catalog on our website.

^{\ast 2} 1011 only



KEW 1109S

DC V AC V Ω dB

- Mirrored scale for easy and accurate reading
- Output terminal to cut off DC component when measuring AC voltage
- Safety designed input terminals and test leads



MODEL 1110

DC V AC V Ω \bullet $^{\circ}\text{C}$

- High sensitivity 20k Ω /V DC
- 1m drop-proof heavy duty design
- Can measure line voltage up to 600V AC (Voltage to ground 300V AC max.) (Protected by 600V ceramic fuse against accidental overload)
- Continuity buzzer, battery check, LED check function
- Skeleton type robust and clear case with carrying handle furnished as standard accessory

CE

	1109S
DC V	0.1/0.5/2.5/10/50/250/1000V (20k Ω /V) $\pm 3\%$ of FS
AC V	10/50/250/1000V (9k Ω /V) $\pm 3\%$ of FS
DC A	50 μA /2.5/25/250mA $\pm 3\%$ of FS
Ω	2/20k Ω /2/20M Ω $\pm 3\%$ of scale length
Decibel	-10 to +62dB
hFE	0 to 1000 ($\Omega \times 10$) $\pm 3\%$ of scale length
Power source	R6(AA)(1.5V) \times 2, 6F22(9V) \times 1
Dimension	150(L) \times 100(W) \times 47(D)mm
Weight	Approx. 330g
Accessories	7066A (Test leads), 8901 (Fuse [0.5A/250V]) \times 1 (included), 1 (spare) Batteries, Instruction manual
Optional accessories	9168 (Carrying case)

Do not make voltage measurements on industry power lines of 250V or higher.

	1110
DC V	0.3V (16.7k Ω /V) $\pm 3\%$ of FS 3/12/30/120/300/600V (20k Ω /V) $\pm 3\%$ of FS
AC V	12V (9k Ω /V) $\pm 4\%$ of FS 30/120/300/600V (9k Ω /V) $\pm 3\%$ of FS
DC A	60 μA /30/300mA $\pm 3\%$ of FS
Ω	3/30/300k Ω $\pm 3\%$ of scale length
Continuity buzzer	Buzzer sounds below 100 Ω
Battery test	1.5V (0.7 to 2V) $\pm 3\%$ of FS (10 Ω load)
Temperature	Possible with the temperature probe 7060 (discontinued).
LED	Approx. 10mA at 0 Ω (at 3V of battery voltage)
Applicable standards	IEC 61010-1 CAT III 300V / CAT II 600V, IEC 61326-1
Power source	R6(AA)(1.5V) \times 2
Dimension	140(L) \times 94(W) \times 39(D)mm
Weight	Approx. 280g
Accessories	7066A (Test leads), 8923 (Fuse [0.5A/600V]) \times 1 (included), 1 (spare) Batteries, 9103 (Carrying case), Instruction manual

DIGITAL MULTIMETERS

KEW 1019R



CE


- True RMS Measurements
- Large display
- Sturdy test leads
- Simple range composition
- Smart structure hard case
- DCV, ACV, Ω , Capacitance Measurement
- Complies with IEC 61010-1 CAT III 300V / CAT II 600V

	1019R
DC V	600.0mV/6.000/60.00/600.0V(Input impedance :10M Ω) $\pm 0.8\%rdg \pm 5dgt(600.0mV/6.000/60.00V)$ $\pm 1.0\%rdg \pm 5dgt(600.0V)$
AC V	6.000/60.00/600.0V(Input impedance:10M Ω) $\pm 1.3\%rdg \pm 5dgt(6.000/60.00V)(50/60Hz)$ $\pm 1.7\%rdg \pm 5dgt(6.000/60.00V)(45 \text{ to } 500Hz)$ $\pm 1.6\%rdg \pm 5dgt(600.0V)(50/60Hz)$ $\pm 2.0\%rdg \pm 5dgt(600.0V)(45 \text{ to } 500Hz)$
Ω	600.0 Ω /6.000/60.00/600.0k Ω /6.000/40.00M Ω $\pm 1.0\%rdg \pm 5dgt(600.0\Omega/6.000/60.00/600.0k\Omega/6.000M\Omega)$ $\pm 2.5\%rdg \pm 5dgt(40.00M\Omega)$
Continuity buzzer	600 Ω (Buzzer sounds below 60 Ω)
Capacitance test	6.000/60.00/600.0nF/6.000/60.00/600.0 μ F $\pm 3.5\%rdg \pm 5dgt(6.000nF)$ $\pm 3.5\%rdg \pm 10dgt(60.00nF)$ $\pm 3.5\%rdg \pm 5dgt(600.0nF/6.000/60.00\mu F)$ $\pm 4.5\%rdg \pm 5dgt(600.0\mu F)$
Applicable standards	IEC 61010-1 CAT III 300V / CAT II 600V IEC 61010-2-033, IEC 61010-031, IEC 61326-2-2
Power source	CR2032(3V) \times 1 (Auto power save : Approx. 15 minutes)
Dimension	126(L) \times 85(W) \times 18(D)mm (including hard case)
Weight	Approx. 135g (including battery and hard case)
Accessories	9188(Hard case), Battery, Instruction manual

Retractable Case Cover

2Way Test Probe Holder

Cap Holder



with Caps : CAT III
without Caps : CAT II

KEW 1030



CE

DC AC V Ω \bullet \rightarrow \leftarrow Hz
DUTY \odot DATA HOLD REL AUTO POWER OFF

- Compact, lightweight, easy to use
- Double molding provides comfortable and good feeling in hand
- Penlight illuminates brightly the point to be measured, even in dark place
- Backlight LCD is highly visible, even in darkness
- Test lead is wrapped in its rear side compartment without difficulty

	1030
DC V	400mV/4/40/400/600V(5 range auto) $\pm 0.8\%rdg \pm 5dgt(400mV \text{ to } 400V)$ $\pm 1.0\%rdg \pm 5dgt(600V)$
AC V	4/40/400/600V(4 range auto) $\pm 1.3\%rdg \pm 5dgt(4/40V)(50/60Hz)$ $\pm 1.6\%rdg \pm 5dgt(400/600V)(50/60Hz)$
Ω	400 Ω /4/40/400k Ω /4/40M Ω (6 range auto) $\pm 1.0\%rdg \pm 5dgt(400\Omega \text{ to } 4M\Omega)$ $\pm 2.5\%rdg \pm 5dgt(40M\Omega)$
Continuity buzzer	Buzzer sounds when resistance is 120 Ω or less.
Diode test	Test voltage approx. 0.3 to 1.5V
Capacitance test	50/500nF/5/50/100 μ F(5 range auto) $\pm 3.5\%rdg \pm 10dgt(50nF)$ $\pm 3.5\%rdg \pm 5dgt(500n \text{ to } 50\mu F)$ $\pm 4.5\%rdg \pm 5dgt(100\mu F)$
Frequency	5/50/500Hz/5/50/200kHz $\pm 0.1\%rdg \pm 5dgt$
Duty	0.1 to 99.9% $\pm 2.5\%rdg \pm 5dgt$ (Pulse width / Pulse cycle)
Applicable standards	IEC 61010-1 CAT III 600V IEC 61010-031, IEC 61326-1(EMC)
Power source	LR44(SR44)(1.5V) \times 2 (Auto power off : Approx. 30 minutes)
Dimension	190(L) \times 39(W) \times 31(D)mm
Weight	Approx. 100g (including batteries)
Accessories	9130(Carrying case), Batteries, Instruction manual

Protection cover prevents unforeseen accident




Pull up and turn.
then, cover

Test lead is wrapped in its rear side compartment without difficulty



Release test lead from holder.



Close the lid after taking out
the test lead through upper
right hand side hole.

DIGITAL MULTIMETERS

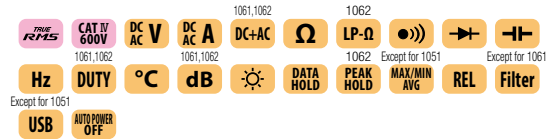


photo : 1052



photo : 1062

KEW 1051/1052
KEW 1061/1062



- True RMS or MEAN value detection mode can be selected (1052 and 1062 only)
- DC+AC TRMS Measurement (1061 and 1062 only)
AC and DC values are displayed simultaneously via dual display
- Fast Peak Hold response time of 250μs (1062 only)
- Low-pass filter except for 1061
- Low Power-Ω measurements (1062 only)
- User calibration function

Safety design for industrial use

- Complies with IEC 61010-1 CAT IV 600V / CAT III 1000V
- Terminal shutter to prevent incorrect test leads insertion in current terminals
- Very wide operating temperature range
From -20 to +55°C for 1061/1062
From -10 to +55°C for 1051/1052

Comprehensive support for data management except for 1051

- Large data internal memory
- Download data and Live Monitoring on a PC via the USB interface (Option for USB Communication set)

High Accuracy, High Performance and Reliable Measurements

- Top accuracy
0.02% basic DC accuracy for 1061/1062
0.09% basic DC accuracy for 1051/1052
- Dual display
1061/1062: 50,000 counts, 51 segments bar graph with white backlight display
1051/1052: 6,000 counts, 31 segments bar graph with white backlight display
- True RMS Measurements
- Wide AC Frequency bandwidth from 10Hz to 100kHz (1062 only)

	1051	1052	1061	1062
Detection mode	True RMS	MEAN/True RMS (switch)	True RMS	MEAN/True RMS (switch)
DC V	600.0mV/6.000/60.00/600.0/1000V (Input impedance: 10MΩ [600mV/60/600/1000V], 11MΩ [6V]) ±0.09%rdg±2dgt *		50.000/500.00/2400.0mV/5.0000/50.000/500.00/1000.0V (Input impedance: Approx. 100MΩ [50/500/2400mV], 10MΩ [5/50/500/1000V]) ±0.02%rdg±2dgt *	
AC V [True RMS]	600.0mV/6.000/60.00/600.0/1000V (Input impedance: 10MΩ<200pF [600mV], 11MΩ<50pF [6V], 10MΩ<50pF [60/600/1000V]) ±0.5%rdg±5dgt *		50.000*/1/500.00mV/5.0000/50.000/500.00/1000.0V (Input impedance: 11MΩ<50pF [50/500mV/5V], 10MΩ<50pF [50/500/1000V]) ±0.7%rdg±30dgt *	±0.4%rdg±30dgt *
AC V [MEAN]	-	600.0mV/6.000/60.00/600.0/1000V (Input impedance: 10MΩ<200pF [600mV], 11MΩ<50pF [6V], 10MΩ<50pF [60/600/1000V]) ±0.5%rdg±5dgt *	-	50.000/500.00mV/5.0000/50.000/500.00/1000.0V (Input impedance: 11MΩ<50pF [50/500mV/5V], 10MΩ<50pF [50/500/1000V]) ±1%rdg±30dgt *
DCV+ACV	-	-	5.0000/50.000/500.00/1000.0V (Input impedance: 11MΩ<50pF [5V], 10MΩ<50pF [50/500/1000V]) ±1%rdg±10dgt *	±0.5%rdg±10dgt *
DC A	600.0/6000μA/60.00/440.0mA/6.000/10.00A ±0.2%rdg±2dgt *		500.00/5000.0μA/50.000/500.00mA/5.0000/10.000A ±0.2%rdg±5dgt *	
AC A [True RMS]	600.0/6000μA/60.00/440.0mA/6.000/10.00A ±0.75%rdg±5dgt *		500.00/5000.0μA/50.000/500.00mA/5.0000/10.000A ±1%rdg±20dgt *	±0.75%rdg±20dgt *
AC A [MEAN]	-	-	-	500.00/5000.0μA/50.000/500.00mA/5.0000/10.000A ±1.5%rdg±20dgt *
DCA+ACA	-	-	500.00/5000.0μA/50.000/500.00mA/5.0000/10.000A ±1.5%rdg±10dgt *	±1%rdg±10dgt *
Ω	600.0Ω/6.000/60.00/600.0kΩ/6.000/60.00MΩ ±0.4%rdg±1dgt *		500.00Ω/5.0000/50.000/500.00kΩ/5.0000/50.000MΩ ±0.1%rdg±2dgt *	±0.05%rdg±2dgt *
LowPower-Ω	-	-	-	5.000/50.00/500.0kΩ/5.000MΩ ±0.2%rdg±3dgt *
Continuity buzzer	600.0Ω (The buzzer turns on at resistances lower than 50±30Ω)		500.0Ω (The buzzer turns on at resistances lower than 100±50Ω)	
Diode test	2.000V ±1%rdg±2dgt Open circuit voltage: <3.5V (Approx. 0.5mA Measuring Current)		2.4000V ±1%rdg±2dgt Open circuit voltage: <5V (Approx. 0.5mA Measuring Current)	
Capacitance	10.00/100.0nF/1.000/10.00/100.0/1000μF ±2%rdg±5dgt *		5.000/50.00/500.0nF/5.000/50.00/500.0μF/5.000/50.00mF ±1%rdg±5dgt *	
Frequency	10.00 to 99.99/90.0 to 999.9Hz/0.900 to 9.999/9.00 to 99.99kHz ±0.02%rdg±1dgt *		2.000 to 9.999/9.00 to 99.99/90.0 to 999.9Hz/0.900 to 9.999/9.00 to 99.99kHz ±0.02%rdg±1dgt *	
DUTY	-	-	10 to 90% ±1%rdg	
Temperature	-50 to 600°C ±2%rdg±2°C (with the use of K-type Temperature probe)		-200 to 1372°C ±1%rdg±1.5°C (with the use of K-type Temperature probe)	
Applicable standards	IEC 61010-1 CAT IV 600V / CAT III 1000V Pollution degree 2, IEC 61326-1 (EMC)			
Power source	R6/LR6(1.5V) × 4 (Auto power off: Approx. 20 minutes)			
Dimension	192(L) × 90(W) × 49(D) mm			
Weight	Approx. 560g (including batteries)			
Accessories	7220A (Test Leads), 8926(Fuse [440mA/1000V]) × 1 (included), 8927(Fuse [10A/1000V]) × 1 (included), Batteries, Instruction manual			

*1 1062 only

*Basic accuracy : For the detailed accuracy, please see our product catalog on our website.

DIGITAL MULTIMETERS

Comprehensive support for data management

※ except for 1051

Large internal memory to store test data

- 1062: 10,000 data in Logging mode, 100 data manually saved.
- 1061: 1,000 data in Logging mode, 100 data manually saved.
- 1052: 1,600 data in Logging mode, 100 data manually saved.
- Logging interval can set from 1 sec. to 30 min.

Test data can be transferred to a PC or directly to a Printer*


- Real-time data can be transferred and shown on a PC.
- Real-time transferring permits the saving of a considerable amount of data on a PC.
- Stored data of internal memory can be monitored by PC.

Data management with the software DMM Application*

- Stored data of internal memory can be monitored by PC.
- List of measured data can be converted into Graph.
- Data can be transferred to Excel and saved as CSV file.

*Optional accessories are required.

Data analysis with Excel




Printer output

L0000 N+12.539 VDC
L0001 N+12.532 VDC
L0002 N+12.532 VDC
L0003 N+12.529 VDC
L0004 N+12.532 VDC
L0005 N+12.538 VDC
L0006 N+12.541 VDC
L0007 N+12.546 VDC
L0008 N+12.552 VDC
L0009 N+12.557 VDC
L0010 N+12.555 VDC
L0011 N+12.554 VDC
L0012 N+12.553 VDC

Printed items (from the left)
 · L: Logging memory
 · 4 digit numbers: Data number
 · N: Normal measurement
 (O: at "OL" display)
 (B: at "Battery warning" display)
 · 5 digit numbers: Measurement
 · VDC: Unit (VDC is DC Voltage)

DMM Application software




System requirements

OS: Windows® 11/10
 Display: XGA (Resolution 1024 × 768 dots) or more
 Required HDD space: 10Mbyte or more
 Others: USB port

*Please download the software from our website.


Optional accessories

Description	MODEL	Contents
Alligator clip	7234	CAT IV 600V / CAT III 1000V 1set
USB Communication set	8241	USB adapter+USB cable
Thermocouple Type K	8405	-40 to 500°C (Surface type, Point material: Ceramic)
	8406	-40 to 500°C (Surface type)
	8407	-40 to 700°C (Liquid, Semi-solid)
	8408	-40 to 600°C (Air, Gas)
Clamp sensor	8115	130A AC / 180A DC
	8121	100A AC
	8122	500A AC
	8123	1000A AC
	8146	30A AC
	8147	70A AC
Banana φ4mm Adjuster Plug	7146	Length :190mm
Carrying case	9154	Soft case(for the main unit with test leads and communication cable)

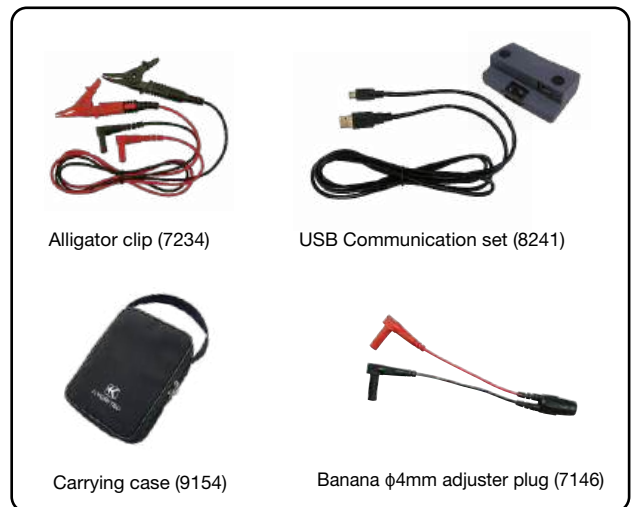

Thermocouple Type K specification

MODEL	Usage	Measurement temperature	Tolerance (°C) (t: Measured temperature)	Response speed
8405	Surface type (Point material: Ceramic)	-40 to 500°C	±2.5 °C (-40 to 333°C), ±0.0075 × t (333 to 500°C)	Approx. 1.8 sec.
8406	Surface type			Approx. 1.0 sec.
8407	Liquid, Semi-solid	-40 to 700°C	±2.5 °C (-40 to 333°C), ±0.0075 × t (333 to 700°C)	1 sec. or less
8408	Air, Gas	-40 to 600°C	±2.5 °C (-40 to 333°C), ±0.0075 × t (333 to 600°C)	0.4 sec.

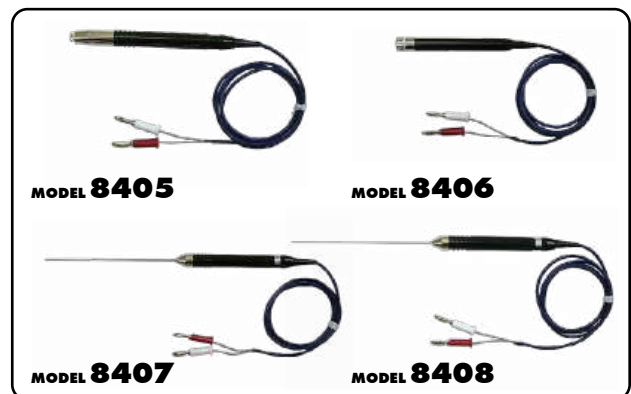

Clamp sensor specification

	AC/DC current sensor	AC current sensor				Leakage & AC current sensor	
	8115	8121*	8122*	8123*	8146*	8147*	8148*
Appearance							
Conductor size	φ12mm max.	φ24mm max.	φ40mm max.	φ55mm max.	φ24mm max.	φ40mm max.	φ68mm max.
Rated current	130A AC / 180A DC	100A AC	500A AC	1000A AC	30A AC	70A AC	100A AC
Output voltage	10mV/A AC, 10mV/A DC	500mV/100A AC	500mV/500A AC	500mV/1000A AC	1500mV/30A AC	3500mV/70A AC	5000mV/100A AC
Accuracy (50/60Hz)	AC ±1.2%rdg±0.4mV DC ±1.2%rdg±0.4mV (This accuracy is defined after zero adjustment)	±2.0%rdg±0.3mV			0 to 15A ±1.0%rdg±0.1mV 15 to 30A ±5.0%rdg	0 to 40A ±1.0%rdg±0.1mV 40 to 70A ±5.0%rdg	0 to 80A ±1.0%rdg±0.1mV 80 to 100A ±5.0%rdg
Frequency range	40Hz to 1kHz						
Dimension	127(L)×42(W)×22(D)mm	97(L)×59(W)×26(D)mm	128(L)×81(W)×36(D)mm	170(L)×105(W)×48(D)mm	100(L)×60(W)×26(D)mm	128(L)×81(W)×36(D)mm	186(L)×129(W)×53(D)mm
Weight	Approx. 140g	Approx. 150g	Approx. 260g	Approx. 360g	Approx. 150g	Approx. 240g	Approx. 510g

*Banana φ4mm adjuster plug(7146) is required to connect the clamp sensor to the DMM.

DIGITAL MULTIMETERS

KEW MATE **2000A**

Ø6
MAX
60A

KEW MATE **2001A**

Ø10
MAX
100A

KEW MATE **2012RA**

Ø12
MAX
120A
true RMS



- Capable of measuring AC and DC currents with OPEN CLAMP SENSOR 60A(2000A)/100A(2001A)/120A(2012RA)
- Cable strength increased with robust cable protection
- Test probe can be fixed to the holster
- Can measure AC/DC current and voltage
- Pocket size and heavy duty design
- Test lead cap to protect from short circuit accident
- The open jaws are thin, perfect to clamp wires even in tight spaces

DC V AC V DC A AC A Ω Hz DATA HOLD AUTO POWER SAVE



photo : 2012RA



Robust cable protection



photo : 2000A



photo : 2001A



	2000A	2001A	2012RA
DC V	340.0mV/3.400/34.00/340.0/600V (input impedance : Approx. 10M Ω) $\pm 1.5\%rdg \pm 4dgt$		600.0mV/6.000/60.00/600.0V (input impedance : Approx. 10M Ω) $\pm 1.0\%rdg \pm 3dgt$
AC V	3.400/34.00/340.0/600V (input impedance : Approx. 10M Ω) $\pm 1.5\%rdg \pm 5dgt$ (50 to 400Hz)		6.000/60.00/600.0V (input impedance : Approx. 10M Ω) $\pm 1.5\%rdg \pm 5dgt$ (45 to 400Hz)
DC A	60.0A $\pm 2.0\%rdg \pm 5dgt$	100.0A $\pm 2.0\%rdg \pm 5dgt$	60.00/120.0A $\pm 2.0\%rdg \pm 8dgt$ (60A) $\pm 2.0\%rdg \pm 5dgt$ (120A)
AC A	60.0A $\pm 2.0\%rdg \pm 5dgt$ (50/60Hz)	100.0A $\pm 2.0\%rdg \pm 5dgt$ (50/60Hz)	60.00/120.0A $\pm 2.0\%rdg \pm 5dgt$ (45 to 65Hz)
Ω	340.0 Ω /3.400/34.00/340.0k Ω /3.400/34.00M Ω $\pm 1.0\%rdg \pm 3dgt$ (340 Ω /3.4/34/340k Ω) $\pm 5.0\%rdg \pm 5dgt$ (3.4M Ω) $\pm 15.0\%rdg \pm 5dgt$ (34M Ω)		600.0 Ω /6.000/60.00/600.0k Ω /6.000/60.00M Ω $\pm 1.0\%rdg \pm 5dgt$ (600 Ω /6/60/600k Ω) $\pm 2.0\%rdg \pm 5dgt$ (6M Ω) $\pm 3.0\%rdg \pm 5dgt$ (60M Ω)
Continuity buzzer	Buzzer sounds below 30 $\pm 10\Omega$ (Continuity buzzer works on 340 Ω range only)		Buzzer sounds below 35 $\pm 25\Omega$
Diode test	-	-	2.000V $\pm 3.0\%rdg \pm 5dgt$ Open circuit voltage : Approx. 2.7V
Capacitance	-	-	400.0nF/4.000/40.00 μ F $\pm 2.5\%rdg \pm 10dgt$
Frequency	AC A	3.400/10.00kHz $\pm 0.1\%rdg \pm 1dgt$	99.99/400.0Hz $\pm 0.2\%rdg \pm 2dgt$ (100Hz) $\pm 0.1\%rdg \pm 1dgt$ (400Hz)
		3.400/34.00/300.0kHz $\pm 0.1\%rdg \pm 1dgt$	99.99/999.9Hz/9.999/99.99/300.0kHz $\pm 0.2\%rdg \pm 2dgt$ (100Hz) $\pm 0.1\%rdg \pm 1dgt$ (1000Hz/10/100/300kHz)
	Input sensitivity	Current: more than 15A Voltage: more than 30V	Current: more than 6A Voltage: more than 6V[up to 10kHz]/more than 20V[10 to 300kHz]
Conductor size	$\phi 6mm$ max.	$\phi 10mm$ max.	$\phi 12mm$ max.
Applicable standards	IEC 61010-1 CAT III 300V / CAT II 600V Pollution degree 2, IEC 61010-031, IEC 61010-2-032, IEC 61326-1		
Power source	R03(AAA)(1.5V) $\times 2$ *Continuous measuring time : Approx. 45hours (Auto power save : Approx. 10minutes)		R03(AAA)(1.5V) $\times 2$ *Continuous measuring time: DC V : Approx. 150hours, AC A : Approx. 25hours (Auto power save : Approx. 15minutes)
Dimension	128(L) \times 87(W) \times 24(D) mm	128(L) \times 92(W) \times 27(D) mm	
Weight	Approx. 210g (including batteries)	Approx. 220g (including batteries)	
Accessories	Batteries, Instruction manual		
Optional accessories	9107(Soft case)		



Test Probe can be fixed to the holster



Forklift maintenance














Automobile maintenance

CLAMP METERS

















CLAMP METERS

Selection Guide of Clamp Meters

Selection Guide of Clamp Meters											
	AC Clamp Meters										Fork Current Tester
	2031	2007R	2117R	2127R	2200	2200R	2002PA	2002R	2204R	2210R	2300R
Appearance											
Conductor size	φ24mm	φ33mm	φ33mm	φ33mm	φ33mm	φ33mm	φ55mm	φ55mm	φ70mm	φ150mm	φ10mm
Display	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
Detection method	—	✓	✓	✓	—	✓	—	✓	✓	✓	✓
Frequency response	40Hz to 1kHz	40 to 400Hz	40Hz to 1kHz	40Hz to 1kHz	45 to 65Hz(ACA) 45 to 500Hz(ACV)	40Hz to 1kHz(ACA) 45 to 500Hz(ACV)	40Hz to 1kHz	40Hz to 1kHz	45 to 500Hz	45 to 500Hz	DC 50/60Hz
Measurement											
AC A	Max	200A	1000A	1000A	1000A	1000A	2000A	2000A	400A	3000A	100A
	Resolution	0.01A	0.1A	0.01A	0.01A	0.01A	0.1A	0.1A	0.001A	0.01A	0.1A
	Accuracy	±2%R±5D	±1.5%R±4D	±1.5%R±4D	±1.5%R±4D	±1.4%R±6D	±1.5%R±5D	±1%R±3D	±1.5%R±3D	±3%R±5D	±2%R±5D
DC A	Max	—	—	—	—	—	—	—	—	—	100A
	Resolution	—	—	—	—	—	—	—	—	—	0.1A
	Accuracy	—	—	—	—	—	—	—	—	—	±2%R±5D
AC Voltage	—	600V	600V	600V	600V	600V	750V	750V	—	—	—
DC Voltage	—	600V	600V	600V	600V	600V	1000V	1000V	—	—	—
Resistance	—	6kΩ	600kΩ	40MΩ	40MΩ	40MΩ	400KΩ	400KΩ	—	—	—
Continuity buzzer	—	✓	✓	✓	✓	✓	✓	✓	—	—	—
Frequency	—	—	—	9.999kHz	—	—	—	—	—	—	—
Duty cycle ratio	—	—	—	—	—	—	—	—	—	—	—
Diode test	—	—	—	✓	—	—	—	—	—	—	—
Capacitance	—	—	—	✓	—	—	—	—	—	—	—
Temperature	—	—	—	—	—	—	—	—	—	—	—
Function											
Non contact voltage	—	—	✓	✓	—	—	—	—	—	—	✓
Backlight	—	—	—	✓	—	—	—	—	✓	✓	—
Data hold	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak hold	—	—	—	✓	—	—	✓	✓	—	—	—
Max/Min	—	—	—	—	—	—	—	—	✓	✓	—
Relative	—	—	—	—	—	—	—	—	—	—	—
Output	—	—	—	—	—	—	✓	✓	—	—	—
Other											
Operating temperature	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 50°C	0 to 50°C	0 to 40°C
Measurement categories	CAT III 300V	CAT IV 300V CAT III 600V	CAT IV 300V CAT III 600V	CAT IV 300V CAT III 600V	CAT III 600V(ACA) CAT III 300V(AC/DCV) CAT II 600V(AC/DCV)	CAT IV 300V(ACA) CAT III 600V(ACA) CAT III 300V(AC/DCV) CAT II 600V(AC/DCV)	CAT III 600V CAT II 1000V	CAT III 600V CAT II 1000V	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT III 300V
Power source	LR44 × 2	R03/LR03 × 2	R03/LR03 × 2	R03/LR03 × 2	R03/LR03 × 2	R03/LR03 × 2	R6 × 2	R6 × 2	R03/LR03 × 2	R03/LR03 × 2	R03 × 2
Dimension (L)×(W)×(D)mm	147×58.5×26	204×81×36	204×81×36	204×81×36	190×68×20	190×68×20	247×105×49	247×105×49	120×70×26 (Display unit)	120×70×26 (Display unit)	161×40×30
Weight(Approx.)	100g	220g	220g	230g	120g	120g	470g	470g	200g	300g	110g
Accessories	Test leads	—	7066A	7066A	7107A	7107A	7107A	7107A	—	—	—
	Fuse	—	—	—	—	—	—	—	—	—	—
	Case	9090	9079	9079	9079	9160	9160	9094	9094	9174	9113

CLAMP METERS

Selection Guide of Clamp Meters

		DC Milliamp Clamp Meter/ Clamp Logger		AC/DC Clamp Meters						Leakage Clamp Meters				
		2500	2510	2010	2033	2046R	2055 2056R	2003A	2009R	2431	2434	2432	2433 2433R	2413F 2413R
Appearance														
Conductor size		φ6 mm	φ6 mm	φ7.5mm	φ24mm	φ33mm	φ40mm	φ55mm	φ55mm	φ24mm	φ28mm	φ40mm	φ40mm	φ68mm
Display		Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
Detection method			—	—	—	—	✓ (2056R)	—	✓	—	—	—	✓ (2433R)	✓ (2413R)
Frequency response		DC	DC	DC 40Hz to 2kHz	DC 20Hz to 1kHz	DC 40 to 400Hz	DC 40 to 400Hz	DC 40Hz to 1kHz	DC 20Hz to 1kHz	40 to 400Hz	40 to 400Hz	20Hz to 1kHz	20Hz to 1kHz	40Hz to 1kHz
Measurement														
AC A	Max	—	—	20A	300A	600A	1000A	2000A	2000A	200A	100A	100A	400A	1000A
	Resolution	—	—	0.1mA	0.01A	0.1A	0.1A	0.1A	0.1A	0.01mA	0.1mA	0.001mA	0.01mA	0.1mA
	Accuracy	—	—	±1%R±2D	±1%R±4D	±2%R±5D	±2%R±5D	±1.5%R±2D	±1.3%R±3D	±2%R±4D	±2%R±4D	±1%R±5D	±1%R±5D	±1.8%R±5D(2413F) ±1%R±2D(2413R)
DC A	Max	120mA	120mA	20A	300A	600A	1000A	2000A	2000A	—	—	—	—	—
	Resolution	0.01mA	0.01mA	0.001A	0.01A	0.1A	0.1A	0.1A	0.1A					
	Accuracy	±0.2%R±5D	±0.2%R±5D	±1%R±2D	±1%R±4D	±1.5%R±5D	±1.5%R±5D	±1.5%R±2D	±1.3%R±2D					
AC Voltage		—	—	—	—	600V	600V	750V	750V	—	—	—	—	—
DC Voltage		—	—	—	—	600V	600V	1000V	1000V	—	—	—	—	—
Resistance		—	—	—	—	60MΩ	60MΩ	4000Ω	4000Ω	—	—	—	—	—
Continuity buzzer		—	—	—	—	✓	✓	✓	✓	—	—	—	—	—
Frequency		—	—	—	—	10kHz	10kHz	—	4000Hz	—	—	—	—	—
Duty cycle ratio		—	—	—	—	✓	✓	—	—	—	—	—	—	—
Diode test		—	—	—	—	✓	✓	—	—	—	—	—	—	—
Capacitance		—	—	—	—	✓	✓ (2056R)	—	—	—	—	—	—	—
Temperature		—	—	—	—	✓	✓ (2056R)	—	—	—	—	—	—	—
Function														
Non contact voltage		—	—	—	—	✓	✓	—	—	—	—	—	—	—
Backlight		✓	✓	—	—	✓	✓	—	—	—	—	—	—	✓ (2413R)
Data hold		✓	✓	—	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak hold		—	—	—	—	✓	✓ (2056R)	✓ (Max)	✓*2	—	—	✓	✓	✓
Max/Min		—	—	—	—	✓	✓	—	—	—	—	—	—	—
Relative		—	—	—	—	✓	✓	—	—	—	—	—	—	—
Output		✓	✓	✓	—	—	—	✓	✓	—	—	—	—	✓
Filter		—	—	—	—	—	—	—	—	✓	✓	✓	✓	✓
Other														
Operating temperature		-10 to 50°C	-10 to 50°C	0 to 50°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C
Measurement Categories		—	—	—	CAT III 300V	CAT IV 600V	CAT IV 600V	CAT IV 600V CAT III 1000V	CAT IV 600V CAT III 1000V	CAT III 300V	CAT III 300V	CAT III 300V	CAT III 300V	CAT III 300V
Power source		R6/LR6 × 4	R6/LR6 × 4*1	6LR61 × 1	LR44 × 2	R03 × 2	R03 × 2	R6 × 2	R6 × 2	LR44 × 2	R03 × 2	R03 × 2	R03 × 2	6F22 × 1
Dimension (L)×(W)×(D)mm		111×61×40 (Display unit) 104×34×20 (Sensor)	111×61×46 (Display unit) 104×34×20 (Sensor)	142×64×26 (Display unit) 153×23×18 (Sensor)	147×59×25	243×77×36	254×82×36	250×105×49	250×105×49	149×60×26	169×75×40	185×81×32	185×81×40	250×130×50
Weight(Approx.)		290g	310g	220g	100g	300g	310g	530g	540g	120g	220g	290g	270g	570g(2413F) 600g(2413R)
Accessories	Test leads	—	—	—	—	7066A	7066A	7107A	7107A	—	—	—	—	—
	Case	9096	9096	9095	9090	9094	9094	9094	9094	9090	9097	9097	9097	9094

*1 External power is available.

*2 In the PEAK mode, the auto-ranging feature is disabled and measuring ranges are fixed as follows.

DC/ACA : 0 to 400.0A

DC/ACV : 0 to 400.0V

DIGITAL AC CLAMP METERS



CE

KEW 2007R

TRUE RMS 033 MAX 1000A AC A DC AC V Ω
DATA HOLD AUTO POWER SAVE

- Fully Safety jaw
- Ergonomic over-molded body gives convenient one-hand operation
- Large easy-to-read display with 0.1A resolution
- Accurate reading with True RMS 600/1000A auto-ranging
- Long battery life
- Safety standard IEC 61010-1 CAT IV 300V / CAT III 600V

	2007R
AC A	600.0/1000A(Auto-ranging) ±1.5%rdg±4dgt[45 to 65Hz] ±2.0%rdg±4dgt[40 to 400Hz]
AC V	600.0V ±1.2%rdg±3dgt[45 to 65Hz] ±1.5%rdg±4dgt[40 to 400Hz]
DC V	600.0V ±1.2%rdg±3dgt
Ω	600.0Ω/6.000kΩ(Auto-ranging) ±1.3%rdg±5dgt[600Ω] ±2.0%rdg±3dgt[6.000kΩ]
Continuity buzzer	600Ω(Buzzer sounds below 90Ω)
Conductor size	φ33mm max.
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2 IEC 61010-031, IEC 61010-2-032, IEC 61010-2-033 IEC 61326-2-2(EMC), IEC 60529(IP40)
Power source	R03/LR03(AAA)(1.5V) × 2 *Continuous measuring time : Approx. 170 hours (when R03 is used) (Auto power save : Approx. 10 minutes)
Dimension	204(L) × 81(W) × 36(D)mm
Weight	Approx. 220g (including batteries)
Accessories	7066A(Test leads), 9079(Carrying case) Batteries, Instruction manual

MODEL 2002PA/2002R



CE

2002R
TRUE RMS 055 MAX 2000A AC A DC AC V Ω
DATA HOLD PEAK HOLD OUT PUT AUTO POWER SAVE

- Can measure large AC current up to 2000A
- Peak hold function
- 55mm large tear drop shaped jaws
- Minimum resolution 0.1A

photo : 2002R

	2002PA	2002R
AC A	400A(0 to 400A) ±1%rdg±3dgt[50/60Hz] ±2%rdg±3dgt[40Hz to 1kHz] 2000A(0 to 1500A) ±1%rdg±3dgt[50/60Hz] ±3%rdg±3dgt[40Hz to 1kHz] 2000A(1500 to 2000A) ±3.0%rdg[50/60Hz]	400A(0 to 400A) ±1.5%rdg±3dgt[45 to 65Hz] ±2.5%rdg±3dgt[40Hz to 1kHz] 2000A(0 to 1500A) ±2%rdg±5dgt[45 to 65Hz] ±3%rdg±5dgt[40Hz to 1kHz] 2000A(1500 to 2000A) ±4%rdg[50/60Hz]
AC V	40/400/750V ±1%rdg±2dgt[50/60Hz] ±1.5%rdg±3dgt[40Hz to 1kHz]	40/400/750V ±1%rdg±2dgt[45 to 65Hz] ±1.5%rdg±3dgt[40Hz to 1kHz]
DC V	40/400/1000V ±1%rdg±2dgt	
Continuity buzzer	Buzzer sounds below 50±35Ω	
Ω	400Ω/4/40/400kΩ ±1.5%rdg±2dgt	
Conductor size	φ55mm max.	
Frequency response	40Hz to 1kHz	
Output	Recorder:400mV DC against 400A AC, 200mV DC against 2000A AC	
Applicable standards	IEC 61010-1 CAT III 600V / CAT II 1000V IEC 61010-031, IEC 61010-2-032, IEC 61326-1	
Power source	R6(AA)(1.5V) × 2 *Continuous measuring time : Approx. 150 hours (2002PA) *Continuous measuring time : Approx. 80 hours (2002R) (Auto power save : Approx. 10 minutes)	
Dimension	247(L) × 105(W) × 49(D)mm	
Weight	Approx. 470g	
Accessories	7107A(Test leads), 9094(Carrying case) Batteries, Instruction manual	
Optional accessories	7256(Output cord)	

MODEL 2031

024 MAX 200A AC A DATA HOLD AUTO POWER OFF

- Can measure large AC current up to 200A
- 24mm tear drop shaped jaws
- Minimum resolution 0.01A

	2031
AC A	20A ±2%rdg±5dgt[50Hz to 1kHz] 200A ±2%rdg±5dgt[50/60Hz] ±3%rdg±10dgt[40Hz to 1kHz]
Conductor size	φ24mm max.
Frequency response	40Hz to 1kHz
Applicable standards	IEC 61010-1 CAT III 300V
Power source	LR44(1.5V) × 2 *Continuous measuring time : Approx. 100 hours (Auto power off : Approx. 10 minutes)
Dimension	147(L) × 58.5(W) × 26(D)mm
Weight	Approx. 100g
Accessories	9090 (Carrying case) Batteries Instruction manual



CE

DIGITAL AC CLAMP METERS

KEW 2117R

TRUE RMS 033 MAX 1000A AC A DC V Ω
●)) NCV DATA HOLD AUTO POWER SAVE

- Fully Safety jaw
- Ergonomic over-molded body gives convenient one-hand operation
- Large easy-to-read display with 0.01A resolution
- Accurate reading with True RMS 60/600/1000A auto-ranging
- Long battery life
- Safety standard IEC 61010-1 CAT IV 300V / CAT III 600V



	2117R
AC A	60.00/600.0/1000A (Auto-ranging) ±1.5%rdg±4dgt [45 to 65Hz] ±2.0%rdg±5dgt [40Hz to 1kHz]
AC V	60.00/600.0V (Auto-ranging) ±1.0%rdg±2dgt [45 to 65Hz] (600V) ±1.5%rdg±4dgt [40Hz to 1kHz] (60/600V)
DC V	60.00/600.0V (Auto-ranging) ±1.0%rdg±3dgt (60V) ±1.2%rdg±3dgt (600V)
Ω	600.0Ω/6.000/60.00/600.0kΩ (Auto-ranging) ±1.0%rdg±5dgt (600Ω) ±2.0%rdg±3dgt (6/60/600kΩ)
Continuity buzzer	600Ω (Buzzer sounds below 90Ω)
Conductor size	φ33mm max.
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2 IEC 61010-031, IEC 61010-2-032, IEC 61010-2-033 IEC 61326-2-2(EMC), IEC 60529(IP40)
Power source	R03/LR03(AAA)(1.5V)×2 *Continuous measuring time : Approx. 170 hours (When R03 is used)(NCV_LED:off)(Auto power save : Approx.10 minutes)
Dimension	204(L) × 81(W) × 36(D)mm
Weight	Approx. 220g (including batteries)
Accessories	7066A (Test leads), 9079 (Carrying case), Batteries Instruction manual

KEW 2127R

TRUE RMS 033 MAX 1000A AC A DC V Ω
●)) Hz → ← NCV
DC1ms/AC10ms
DATA HOLD PEAK HOLD AUTO POWER SAVE

- Fully Safety jaw
- Ergonomic over-molded body gives convenient one-hand operation
- Large easy-to-read display with 0.01A resolution
- Accurate reading with True RMS 60/600/1000A auto-ranging
- Peak Hold for inrush current
- Large display with backlight
- Capacitance and Diode test
- Long battery life
- Safety standard IEC 61010-1 CAT IV 300V / CAT III 600V

	2127R
AC A	60.00/600.0/1000A (Auto-ranging) ±1.5%rdg±4dgt [45 to 65Hz] ±2.0%rdg±5dgt [40Hz to 1kHz]
AC V	60.00/600.0V (Auto-ranging) ±1.0%rdg±2dgt [45 to 65Hz] (600V) ±1.5%rdg±4dgt [40Hz to 1kHz] (60/600V)
DC V	60.00/600.0V (Auto-ranging) ±1.0%rdg±3dgt (60V) ±1.2%rdg±3dgt (600V)
Ω	600.0Ω/6.000/60.00/600.0kΩ/6.000/40.00MΩ(Auto-ranging) ±1.0%rdg±5dgt (600Ω) ±2.0%rdg±3dgt (6/60/600kΩ) ±3.0%rdg±3dgt (6MΩ) ±5.0%rdg±3dgt (40MΩ)
Continuity buzzer	600Ω (Buzzer sounds below 90Ω)
Capacitance test	1.000/10.00/100.0μF ±3.0%rdg±15dgt (1μF) ±3.0%rdg±10dgt (10/100μF)
Hz	999.9Hz/9.999kHz (Auto-ranging) ±0.1%rdg±3dgt (Input sensitivity Current:more than 4A Voltage:more than 2V)
Conductor size	φ33mm max.
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2 IEC 61010-031, IEC 61010-2-032, IEC 61010-2-033 IEC 61326-2-2(EMC), IEC 60529(IP40)
Power source	R03/LR03(AAA)(1.5V) × 2 *Continuous measuring time : Approx. 170 hours (when R03 is used)(NCV_LED, Backlight:off)(Auto power save : Approx.10 minutes)
Dimension	204(L) × 81(W) × 36(D)mm
Weight	Approx. 230g (including batteries)
Accessories	7066A (Test leads), 9079 (Carrying case), Batteries Instruction manual

KEW 2200/2200R

2200R
TRUE RMS 033 MAX 1000A AC A DC V Ω
●)) DATA HOLD AUTO POWER OFF

- Ultra Slim and lightweight Handy design
- φ33mm tear drop shaped jaws
- 1000A AC Clamp Meter
- DMM function ACV, DCV, Ω, Continuity buzzer
- Fuseless electronic protection on Ω/→)) up to 600V
- Safety standard IEC 61010-1 CAT IV 300V* / CAT III 600V IEC 61010-2-032
*2200R only
- Minimum resolution 0.01A


	2200	2200R
Detection method	Averaging value	True RMS value
AC A	40.00/400.0/1000A (Auto-ranging) ±1.4%rdg±6dgt(50/60Hz) ±1.6%rdg±6dgt(45 to 65Hz)	40.00/400.0/1000A (Auto-ranging) ±1.5%rdg±5dgt(45 to 65Hz) ±2.0%rdg±5dgt(40Hz to 1kHz)
AC V	4.000/40.00/400.0/600V (Auto-ranging) ±1.8%rdg±7dgt(45 to 65Hz) ±2.3%rdg±8dgt(65 to 500Hz)	
DC V	400.0mV/4.000/40.00/400.0/600V (Auto-ranging) ±1.0%rdg±3dgt* *400mV range is excluded	
Ω	400.0Ω/4.000/40.00/400.0kΩ/4.000/40.00MΩ (Auto-ranging) ±2.0%rdg±4dgt(0 to 400kΩ) ±4.0%rdg±4dgt(4MΩ) ±8.0%rdg±4dgt(40MΩ)	
Continuity buzzer	Buzzer sounds below 50±30Ω	
Conductor size	φ33mm max.	
Applicable standards	IEC 61010-1 CAT IV 300V* / CAT III 600V Pollution degree2(AC A) CAT III 300V / CAT II 600V Pollution degree2(AC/DC V) IEC 61010-031, IEC 61010-2-032, IEC 61326(EMC)	
Power source	R03/LR03(AAA)(1.5V) × 2	
Continuous measuring time	Approx. 350 hours	Approx. 120 hours
	Auto power off : Approx.10 minutes	
Dimension	190(L) × 68(W) × 20(D)mm	
Weight	Approx. 120g(including batteries)	
Accessories	7107A (Test leads), 9160 (Carrying case), Batteries, Instruction manual	

*1 2200R only

photo : 2200R

DIGITAL AC CLAMP METERS

KEW 2204R



- Flexible and light weight clamp sensor
- True RMS
- MIN / MAX function
- Backlight LCD display
- IEC 61010-1 CAT IV 600V / CAT III 1000V
- Minimum resolution 0.001A



	2204R
AC A	
Range	4.000/40.00/400.0A
Accuracy	$\pm 3\% \text{rdg} \pm 5 \text{dgt}$ [45 to 500Hz] (At the center of the circle formed by the flexible sensor)
Crest factor	Full scale CF<1.6, half scale<3.2 Effective input crest values are $\sqrt{2}$ times of the max values of each range.
Conductor size	$\phi 70 \text{mm}$ max.
Influence of Conductor position	Additional $\pm 2\%$ (max.) depending on the distance from the center position
Overload protection	500A AC for 10 seconds
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT IV 600V / CAT III 1000V Pollution degree 2 IEC 61326-1(EMC), IEC 60529(IP40)
Operating temperature and humidity range	0 to +50°C, relative humidity 80% or less(no condensation)
Storage temperature and humidity range	-10 to +60°C, relative humidity 70% or less(no condensation)
Power source	R03 / LR03(AAA)(1.5V) $\times 2$ *Continuous measuring time : Approx. 120 hours (Auto power off : Approx.15 minutes)
Dimension	120(L) \times 70(W) \times 26(D) mm : Display unit 1.8m : Sensor cable
Weight	Approx. 200g (including batteries)
Accessories	9174 (Carrying case), Batteries, Instruction manual

KEW 2210R



- Flexible and light weight clamp sensor
- Wide reading range up to 3000A
- True RMS
- MIN / MAX function
- Backlight LCD display
- IEC 61010-1 CAT IV 600V / CAT III 1000V
- Minimum resolution 0.01A



	2210R
AC A	
Range	30.00/300.0/3000A
Accuracy	$\pm 3\% \text{rdg} \pm 5 \text{dgt}$ [45 to 500Hz] (At the center of the circle formed by the flexible sensor)
Crest factor	Full scale CF<1.6, half scale<3.2 Effective input crest values are $\sqrt{2}$ times of the max values of each range.
Conductor size	$\phi 150 \text{mm}$ max.
Influence of Conductor position	Additional $\pm 3\%$ (max.) depending on the distance from the center position
Overload protection	5000A AC for 10 seconds
Applicable standards	IEC 61010-1, IEC 61010-2-030 CAT IV 600V / CAT III 1000V Pollution degree 2 IEC 61010-2-032, IEC 61326-1(EMC), IEC 60529(IP40)
Operating temperature and humidity range	0 to +50°C, relative humidity 80% or less(no condensation)
Storage temperature and humidity range	-10 to +60°C, relative humidity 70% or less(no condensation)
Power source	R03 / LR03 (AAA) (1.5V) $\times 2$ *Continuous measuring time : Approx. 120hours (Auto power off : Approx. 15 minutes)
Dimension	120 (L) \times 70 (W) \times 26 (D) mm : Display unit 1.8m : Sensor cable
Weight	Approx. 300g (including batteries)
Accessories	9174 (Carrying case), Batteries, Instruction manual



Easy to use in crowded cable areas



Easy to clamp a wire in hard-to-reach narrow spaces



Easy to read backlight LCD display

DIGITAL AC/DC CLAMP METERS



KEW 2003A

CAT IV 600V Ø55 MAX 2000A DC A DC V Ω
400ms
DATA HOLD PEAK HOLD OUT PUT AUTO POWER SAVE

- Measurement of both AC and DC current with transformer jaws of large diameter
- Can measure AC and DC currents up to 2000A
- Output terminal for recorder connection
- AC/DC voltage, resistance measurement and continuity functions also available
- Minimum resolution 0.1A

CE

	2003A
AC A	400/2000A(0 to 1000A) ±1.5%rdg±2dgt[50/60Hz] ±3%rdg±4dgt[40 to 500Hz] ±5%rdg±4dgt[500Hz to 1kHz] 2000A(1001 to 1999A) ±3%rdg±2dgt[50/60Hz]
DC A	400/2000A ±1.5%rdg±2dgt
AC V	400/750V ±1.5%rdg±2dgt[50/60Hz] ±1.5%rdg±4dgt[40Hz to 1kHz]
DC V	400/1000V ±1%rdg±2dgt
Ω	400/4000Ω ±1.5%rdg±2dgt
Continuity buzzer	Buzzer sounds below 50±35Ω
Conductor size	φ55mm max.
Frequency response	40Hz to 1kHz
Output	Recorder: 400mV DC against 400A AC/DC 200mV DC against 2000A AC/DC
Applicable standards	IEC 61010-1 CAT IV 600V / CAT III 1000V IEC 61010-2-032
Power source	R6(AA)(1.5V) × 2 *Continuous measuring time : Approx. 100 hours(Auto power save : Approx. 10 minutes)
Dimension	250(L) × 105(W) × 49(D)mm
Weight	Approx. 530g
Accessories	7107A(Test leads), 9094(Carrying case) Batteries, Instruction manual
Optional accessories	7256(Output cord)



KEW 2009R

TRUE RMS CAT IV 600V Ø55 MAX 2000A DC A DC V
10ms
Ω Hz DATA HOLD PEAK HOLD OUT PUT
AUTO POWER OFF

- True RMS reading instrument ideal for accurate measurement of distorted waveforms and non-sinusoidal waveforms arising from thyristors
- Can measure AC and DC currents up to 2000A
- Output terminal for recorder connection
- Minimum resolution 0.1A

CE

	2009R
AC A	400.0/2000A ±1.3%rdg±3dgt (0 to 400A, 150 to 1700A)[45 to 66Hz] ±2.0%rdg±5dgt (0 to 400A, 150 to 1700A)[20Hz to 1kHz] ±2.3%rdg±3dgt (1701 to 2000A)[45 to 66Hz]
DC A	400.0/2000A ±1.3%rdg±2dgt
AC V	40.00/400.0/750V ±1.0%rdg±3dgt [45 to 66Hz] ±1.5%rdg±5dgt [20Hz to 1kHz]
DC V	40.00/400.0/1000V ±1.0%rdg±2dgt
Ω	400.0/4000Ω ±1.5%rdg±2dgt
Continuity buzzer	Buzzer sounds below 20±1Ω
Hz	10 to 4000Hz ±1.5%rdg±5dgt (Input sensitivity Current: more than 40A Voltage: more than 10V)
Output	Recorder: 400mV DC against 400A AC/DC 200mV DC against 2000A AC/DC
Conductor size	φ55mm max.
Applicable standards	IEC 61010-1 CAT IV 600V / CAT III 1000V IEC 61010-2-032, IEC 61326-2-2
Power source	R6 (1.5V) × 2 *Continuous measuring time: Approx. 11 hours (Auto power off: Approx. 10 minutes)
Dimension	250 (L) × 105 (W) × 49 (D) mm
Weight	Approx. 540g(including batteries)
Accessories	7107A(Test leads), 9094(Carrying case) Batteries, Instruction manual
Optional accessories	7256(Output cord)



MODEL 2010

Ø7.5 MAX 20A DC A OUT PUT

- High sensitivity, miniature AC/DC clamp meter
- 0.1mA minimum resolution for AC current and 1mA minimum resolution for DC current
- Output terminal for recorder connection

	2010
AC A	200mA/2/20A ±1%rdg±2dgt[50/60Hz](200mA) ±1.5%rdg±8dgt[40Hz to 2kHz](200mA) ±1%rdg±2dgt[50/60Hz](2A) ±2.5%rdg±10dgt[40Hz to 2kHz](2/20A)
DC A	2/20A ±1%rdg±2dgt(2A) ±1.5%rdg±4dgt(20A)
Conductor size	φ7.5mm max.
Frequency response	40Hz to 2kHz DC
Output	Recorder: 200mV DC against 200mA/2/20A AC 200mV DC against 2/20A DC
Power source	6LR61(9V Alkaline battery) × 1 or AC adapter *Continuous measuring time : Approx. 20 hours (DC)/Approx. 40 hours (AC)
Dimension	142(L) × 64(W) × 26(D)mm : Display unit 153(L) × 23(W) × 18(D)mm : Sensor
Weight	Approx. 220g
Accessories	9095(Carrying case), Battery, Instruction manual
Optional accessories	7256(Output cord)

DIGITAL AC/DC CLAMP METERS



CE

MODEL 2033

Ø24 MAX 300A DC AC A DATA HOLD AUTO POWER SAVE

- Smallest clamp meter capable of AC and DC current measurements
- 300A auto-ranging has minimum resolution of 0.01A AC/DC
- Zero adjustment of DC current is possible at the push of a button

	2033
AC A	40/300A ±1%rdg±4dgt[50/60Hz](0 to 40A) ±2.5%rdg±4dgt[20Hz to 1kHz](0 to 40A) ±1.5%rdg±4dgt[50/60Hz](20 to 200A) ±2.5%rdg±4dgt[20Hz to 1kHz](20 to 200A) ±3.5%rdg[50/60Hz](200 to 300A) ±4%rdg[20Hz to 1kHz](200 to 300A)
DC A	40/300A ±1%rdg±4dgt(0 to ±40A) ±1.5%rdg±4dgt(±20 to ±200A) ±3%rdg(±200 to ±300A)
Conductor size	φ24mm max.
Frequency response	20Hz to 1kHz DC
Applicable standards	IEC 61010-1 CAT III 300V IEC 61010-2-032
Power source	LR44(1.5V) × 2 *Continuous measuring time : Approx. 10 hours (Auto power save : Approx. 5 minutes)
Dimension	147(L) × 59(W) × 25(D)mm
Weight	Approx. 100g
Accessories	9090 (Carrying case) Batteries Instruction manual



CE

KEW 2046R

THE RMS CAT IV 600V Ø33 MAX 600A DC AC A DC V
Ω Hz DUTY 10ms
°C NCV DATA HOLD PEAK HOLD MAX/MIN
REL AUTO POWER OFF

- Very useful for power distribution companies, power utilities and maintenance fields
- Red LED, as "Non Contact Voltage" function, gives warning to the user on the presence of AC voltage
- Double molding gives comfortable feeling in palm
- 6039 counts with Bar Graph display
- Minimum resolution 0.1A

	2046R
AC A	0 to 600.0A ±2.0%rdg±5dgt[50/60Hz] ±3.5%rdg±5dgt[40 to 500Hz]
DC A	0 to 600.0A ±1.5%rdg±5dgt
AC V	6/60/600V(Auto-ranging) ±1.5%rdg±4dgt[50/60Hz] ±3.5%rdg±5dgt[40 to 400Hz]
DC V	600mV/6/60/600V(Auto-ranging) ±1.0%rdg±3dgt
Ω	600Ω/6/60/600kΩ/6/60MΩ(Auto-ranging) ±1%rdg±5dgt(600Ω to 6MΩ) / ±5%rdg±8dgt(60MΩ)
Continuity buzzer	Buzzer Sounds at 100Ω
Hz	10/100Hz/1/10kHz(Auto-ranging) (Input sensitivity Current:more than 50A[40 to 400Hz] Voltage:more than 1V[6V Range], 4.2V[60V Range], 42V[600V Range][to 10kHz])
DUTY	0.1 to 99.9% ±2.5%rdg ±5dgt (Pulse width/Pulse cycle)
Capacitance test	400nF/4/40μF(Auto-ranging)
Temperature	-50 to +300°C(with the use of Temperature probe 8216)
Conductor size	φ33mm max.
Applicable standards	IEC 61010-1 CAT IV 600V IEC 61010-2-032, IEC 61326
Power source	R03 (1.5V)(AAA) × 2 *Continuous measuring time : Approx. 10 hours (Auto power off : Approx. 15 minutes)
Dimension	243(L) × 77(W) × 36(D) mm
Weight	Approx. 300g
Accessories	7066A(Test leads), 9094(Carrying case), Batteries, Instruction manual
Optional accessories	8216(Temperature probe)



CE

KEW 2055/2056R

2056R THE RMS CAT IV 600V Ø40 MAX 1000A DC AC A DC V
Ω Hz DUTY 2056R/10ms
°C NCV DATA HOLD PEAK HOLD MAX/MIN
REL 2055 2056R AUTO POWER SAVE AUTO POWER OFF

- Very useful for power distribution companies, power utilities and maintenance fields
- Red LED, as "Non Contact Voltage" function, gives warning to the user on the presence of AC voltage
- Double molding gives comfortable feeling in palm
- 6039 counts with Bar Graph display
- Minimum resolution 0.1A

photo : 2056R

	2055	2056R
AC A	0 to 600.0/1000A ±1.5%rdg±5dgt[50/60Hz] ±3.0%rdg±5dgt[40 to 400Hz]	0 to 600.0/1000A ±2.0%rdg±5dgt[50/60Hz] ±3.5%rdg±5dgt[40 to 500Hz]
DC A	0 to 600.0/1000A ±1.5%rdg±5dgt	
AC V	6/60/600V(Auto-ranging) ±1.3%rdg±4dgt[50/60Hz] ±3.0%rdg±5dgt[40 to 400Hz]	6/60/600V(Auto-ranging) ±1.5%rdg±4dgt[50/60Hz] ±3.5%rdg±5dgt[40 to 400Hz]
DC V	600mV/6/60/600V(Auto-ranging) ±1.0%rdg±3dgt	
Ω	600Ω/6/60/600kΩ/6/60MΩ (Auto-ranging) ±1%rdg±5dgt(600Ω to 6MΩ) / ±5%rdg±8dgt(60MΩ)	
Continuity buzzer	Buzzer Sounds at 100Ω	
Capacitance test	—	400nF/4/40μF(Auto-ranging)
Temperature	—	-50 to +300°C (with the use of Temperature probe 8216)
Hz	10/100Hz/1/10kHz(Auto-ranging) (Input sensitivity Current:more than 50A[40 to 400Hz] Voltage:more than 1V[6V Range], 4.2V[60V Range], 42V[600V Range][to 10kHz])	
DUTY	0.1 to 99.9% ±2.5%rdg ±5dgt (Pulse width/Pulse cycle)	
Conductor size	φ40mm max.	
Applicable standards	IEC 61010-1 CAT IV 600V, IEC 61010-2-032, IEC 61326	
Power source	R03 (1.5V)(AAA) × 2 *Continuous measuring time : Approx. 35 hours (Auto power save : Approx. 15 minutes) (2055) *Continuous measuring time : Approx. 10 hours (Auto power off : Approx. 15 minutes) (2056R)	
Dimension	254(L) × 82(W) × 36(D) mm	
Weight	Approx. 310g	
Accessories	7066A(Test leads), 9094(Carrying case), Batteries, Instruction manual	
Optional accessories	—	8216(Temperature probe)

DC MILLIAMP CLAMP METER/CLAMP LOGGER

KEW **2500/2510**

06 DC A DATA HOLD AUTO POWER OFF OUTPUT MEMORY Bluetooth External Power Supply



photo : 2510


CE

- 0.01mA resolution for DC current
- Top class measurement with 0.2% accuracy
- $\phi 6\text{mm}$ clamp jaw easy to use in tight places
- Measurement from 0.01 to 120.0mA
- Dual display with backlight shows both measured value (mA) and percentage value of 4 to 20 mA span
- Spotlight for illuminating measurement point
- Analog output terminal for recorder connection
- Memory function stores up to 192,000 records (2510 only)
- Transfer data to PC via Bluetooth (2510 only)

	2500	2510
DC A	20/100mA(Auto-ranging) $\pm 0.2\% \text{rdg} \pm 5 \text{dgt}$ (0.00 to 21.49mA) $\pm 1.0\% \text{rdg} \pm 5 \text{dgt}$ (21.0 to 120.0mA)	
Conductor size	$\phi 6\text{mm}$ max.	
Analog output	Recorder: 1000mV DC against 100mA DC	
Communication interface	—	Bluetooth® 5.0*
Applicable standards	IEC 61010-1 Pollution degree 2 IEC 61010-2-032, IEC 61326-1(EMC) IEC 60529(IP40)	
Operating temperature and humidity range	-10 to +50°C, relative humidity 85% or less (no condensation) When using AC adapter: 0 to +40°C, relative humidity 85% or less (no condensation)	
Storage temperature and humidity range	-20 to +60°C, relative humidity 85% or less (no condensation)	
Power source	R6/LR6(AA) (1.5V) $\times 4$	R6/LR6(AA) (1.5V) $\times 4$ (Alkaline LR6 is recommended.) External supply (AC adapter MODEL 8320)
Battery life	Approx. 60 hours continuous (with Backlight and LED light OFF)	Approx. 50 hours continuous with alkaline batteries (with Backlight, LED light and Bluetooth® feature OFF)
Dimension	111(L) \times 61(W) \times 40(D)mm : Display unit 104(L) \times 34(W) \times 20(D)mm : Sensor 700mm : Sensor cable	111(L) \times 61(W) \times 46(D)mm : Display unit 104(L) \times 34(W) \times 20(D)mm : Sensor 700mm : Sensor cable
Weight	Approx. 290g (including batteries)	Approx. 310g (including batteries)
Accessories	9096(Carrying case) Batteries Instruction manual	8320(AC adapter) 9096(Carrying case) Batteries, Instruction manual
Optional accessories	7256(Output cord)	


*Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

Analog output terminal for recorder connection

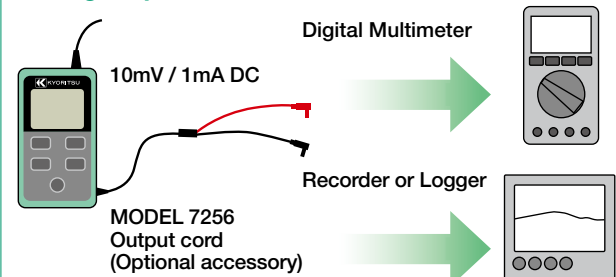

Note: The Auto power off can be disabled for long recording

Memory function/Communication function (2510 only)

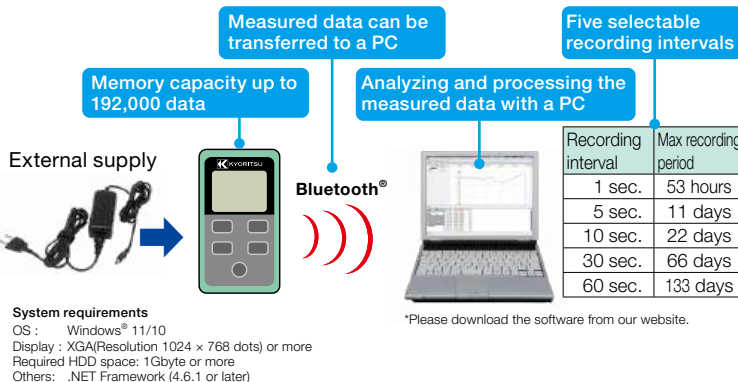

Accessories

MODEL 9096
Carrying case



— 2510 only —
MODEL 8320
AC adapter



Optional accessory

MODEL 7256
Output cord



Diameter of measurable conductor : $\phi 6\text{mm}$ max.



For signal measurement in process and building instrumentation



Spotlight LED & Backlight Display



LEAKAGE CLAMP METERS



CE

MODEL 2431

Ø24 MAX 200A AC A DATA HOLD Filter AUTO POWER OFF

- Frequency Selector Switch to eliminate the effect of harmonics
- Auto power-off function
- Rotary switch for easy one finger power-on and range selection
- Minimum resolution 0.01mA

	2431
AC A (50/60Hz)	20/200mA/200A ±3%rdg±5dgt(20/200mA/100A) ±5%rdg±5dgt(200A)
AC A (WIDE)	20/200mA/200A ±2%rdg±4dgt[50/60Hz](20/200mA/0 to 100A) ±5%rdg±6dgt[40 to 400Hz](20/200mA/0 to 100A) ±5%rdg±4dgt[50/60Hz](100.1 to 200A)
Conductor size	φ24mm max.
Frequency response	40 to 400Hz
Effect of external stray magnetic field φ15mm 100A	10mA AC max.
Applicable standards	IEC 61010-1 CAT III 300V, IEC 61010-2-032
Power source	LR44(1.5V) × 2 *Continuous measuring time : Approx. 15 hours (Auto power off : Approx. 10 minutes)
Dimension	149(L) × 60(W) × 26(D)mm
Weight	Approx. 120g
Accessories	9090 (Carrying case) Batteries Instruction manual



CE

MODEL 2432

High sensitive model 10ms

Ø40 MAX 100A AC A DATA HOLD PEAK HOLD Filter

AUTO POWER OFF

- Frequency Selector Switch to eliminate the effect of harmonics
- Three ranges: 4/40mA/100A
- Minimum resolution 0.001mA

	2432
AC A (50/60Hz)	4/40mA/100A ±1%rdg±5dgt(4/40mA) ±1%rdg±5dgt(0 to 80A) ±5%rdg(80.1 to 100A)
AC A (WIDE)	4/40mA/100A ±1%rdg±5dgt[50/60Hz] ±2.5%rdg±10dgt[20Hz to 1kHz](4/40mA) ±1%rdg±5dgt[50/60Hz] ±2.5%rdg±10dgt[40Hz to 1kHz](0 to 80A) ±5%rdg[50/60Hz] ±10%rdg[40Hz to 1kHz](80.1 to 100A)
Maximum circuit voltage	600V AC/DC (between line/neutral) 300V AC/DC (against earth)
Conductor size	φ40mm max.
Frequency response	20Hz to 1kHz(40Hz to 1kHz:100A)
Effect of external stray magnetic field	Approx. 2mA AC in proximity to a 15mm conductor carrying 100A AC
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-032
Power source	R03(DC1.5V) × 2 *Continuous measuring time : Approx. 40 hours (Auto power off : Approx. 10 minutes)
Dimension	185(L) × 81(W) × 32(D)mm
Weight	Approx. 290g
Accessories	9097(Carrying case), Batteries, Instruction manual



CE

MODEL 2433/2433R

2433R 10ms

TRUE RMS Ø40 MAX 400A AC A DATA HOLD PEAK HOLD

Filter AUTO POWER OFF

- Frequency Selector Switch to eliminate the effect of harmonics
- Three ranges: 40/400mA/400A
- Minimum resolution 0.01mA

	2433	2433R
AC A (50/60Hz)	40.00/400.0mA/400.0A ±1%rdg±5dgt(40/400mA) ±1%rdg±5dgt(0 to 350A) ±2%rdg(350.1 to 399.9A)	40.00/400.0mA/400.0A ±1%rdg±5dgt(0 to 100A) ±1%rdg±5dgt(100 to 300A) ±2%rdg(300 to 400A)
AC A (WIDE)	40.00/400.0mA/400.0A ±2.5%rdg±10dgt[20Hz to 1kHz](40/400mA) ±2.5%rdg±10dgt[40Hz to 1kHz](0 to 350A) ±5%rdg[40Hz to 1kHz](350.1 to 399.9A)	40.00/400.0mA/400.0A ±2.5%rdg±10dgt[20Hz to 1kHz](0/100A) ±2.5%rdg±10dgt[40Hz to 1kHz](100 to 300A) ±5%rdg[40Hz to 1kHz](300 to 400A)
Maximum circuit voltage	600V AC/DC (between line/neutral)	300V AC/DC (against earth)
Conductor size	φ40mm max.	
Frequency response	20Hz to 1kHz(40Hz to 1kHz:400A)	
Effect of external stray magnetic field	Approx. 10mA AC in proximity to a 15mm conductor carrying 100A AC	
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2, IEC 61010-2-032	
Power source	R03 (DC1.5V) × 2 *Continuous measuring time : Approx. 40 hours (2433) *Continuous measuring time : Approx. 24 hours (2433R) (Auto power off : Approx 10 minutes)	
Dimension	185(L) × 81(W) × 40(D)mm	
Weight	Approx. 270g	
Accessories	9097 (Carrying case), Batteries, Instruction manual	

photo : 2433R

LEAKAGE CLAMP METERS/FORK CURRENT TESTER

KEW 2413F/2413R



CE

2413R
RMS 068 MAX 1000A AC A DATA HOLD PEAK HOLD
2413R
OUT PUT Filter

- Large transformer jaws of 68mm diameter makes it possible to clamp on all three or four wires (3 phases) together for leakage current measurement
- Frequency filter switch to eliminate the effect of the harmonics
- 2 way analog output terminal
- Minimum resolution 0.1mA

photo : 2413R

	2413F	2413R
AC A (50/60Hz)	200mA/2/20/200/1000A $\pm 1.5\% \text{rdg} \pm 2 \text{dgt}$ (200mA/2/20A) $\pm 2.0\% \text{rdg} \pm 2 \text{dgt}$ (200A/0 to 500A) $\pm 5.5\% \text{rdg}$ (501 to 1000A)	200mA/2/20/200/1000A $\pm 2.5\% \text{rdg} \pm 5 \text{dgt}$ (200mA/2/20A) $\pm 3.0\% \text{rdg} \pm 5 \text{dgt}$ (200A/0 to 500A) $\pm 5.5\% \text{rdg}$ (501 to 1000A)
AC A (WIDE)	200mA/2/20/200/1000A $\pm 1.0\% \text{rdg} \pm 2 \text{dgt}$ [50/60Hz] $\pm 3.0\% \text{rdg} \pm 2 \text{dgt}$ [40Hz to 1kHz] (200mA/2/20A) $\pm 1.5\% \text{rdg} \pm 2 \text{dgt}$ [50/60Hz] $\pm 3.5\% \text{rdg} \pm 2 \text{dgt}$ [40Hz to 1kHz] (200A/0 to 500A) $\pm 5\% \text{rdg}$ [50/60Hz] $\pm 10\% \text{rdg}$ [40Hz to 1kHz] (501 to 1000A)	200mA/2/20/200/1000A $\pm 1.8\% \text{rdg} \pm 5 \text{dgt}$ [50/60Hz] $\pm 3.0\% \text{rdg} \pm 5 \text{dgt}$ [40Hz to 1kHz] (200mA/2/20A) $\pm 2.0\% \text{rdg} \pm 5 \text{dgt}$ [50/60Hz] $\pm 3.5\% \text{rdg} \pm 5 \text{dgt}$ [40Hz to 1kHz] (200A/0 to 500A) $\pm 5.0\% \text{rdg}$ [50/60Hz] (501 to 1000A)
Conductor size	$\phi 68 \text{mm}$ max.	
Frequency response	40Hz to 1kHz	
Effect of external stray magnetic field $\phi 15 \text{mm}$ 100A	10mA AC max.	
Output	Waveform: 200mV AC against the maximum value of each range (1000A range is 100mV) Recorder: 200mV DC against the maximum value of each range (1000A range is 100mV)	
Crest factor	—	3.0 or less
Applicable standards	IEC 61010-1 CAT III 300V, IEC 61010-2-032	
Power source	6F22(9V) \times 1 *Continuous measuring time : Approx. 60 hours	
Dimension	250(L) \times 130(W) \times 50(D)mm	
Weight	Approx. 570g	Approx. 600g
Accessories	9094(Carrying case), Battery, Instruction manual	
Optional accessories	7073(2WAY Output cord)	

MODEL 2434



CE

028 MAX 100A AC A DATA HOLD Filter AUTO POWER SAVE

- Least affected by external stray magnetic field
- Frequency Selector Switch to eliminate the effect of harmonics
- Minimum resolution 0.1mA

	2434
AC A (50/60Hz)	400mA/4/100A $\pm 2\% \text{rdg} \pm 4 \text{dgt}$
AC A (WIDE)	400mA/4/100A $\pm 2\% \text{rdg} \pm 4 \text{dgt}$ [50/60Hz] $\pm 3\% \text{rdg} \pm 5 \text{dgt}$ [40 to 400Hz]
Conductor size	$\phi 28 \text{mm}$ max.
Frequency response	40 to 400Hz
Effect of external stray magnetic field $\phi 15 \text{mm}$ 100A	20mA AC max.
Applicable standards	IEC 61010-1 CAT III 300V, IEC 61010-2-032
Power source	R03(AAA) (1.5V) \times 2 *Continuous measuring time : Approx. 150 hours(Auto power save : Approx. 10 minutes)
Dimension	169(L) \times 75(W) \times 40(D)mm
Weight	Approx. 220g
Accessories	9097(Carrying case), Batteries, Instruction manual

KEW 2300R

KEW FORK CURRENT TESTER



CE

RMS 010 MAX 100A DC AC A NCV DATA HOLD
AUTO POWER OFF

- True RMS reading is an essential feature for accurate measurement
- "Non Contact Voltage" function indicates the presence of AC voltage by warning the user with an audible signal
- Zero adjustment of DC current is possible at the push of a button
- Auto Power Off
- Minimum resolution 0.1A

	2300R
AC A(50/60Hz)	0 to 100.0A $\pm 2.0\% \text{rdg} \pm 5 \text{dgt}$
DC A	0 to $\pm 100.0 \text{A}$ $\pm 2.0\% \text{rdg} \pm 5 \text{dgt}$
Crest factor	2.5
Non contact voltage	Detect AC voltage without contacting with socket wire. During voltage detection, "Hi" flashes and a buzzer sounds.
Maximum digit	1,049
Conductor size	$\phi 10 \text{mm}$ max.
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2
Power source	R03 (AAA) \times 2 (Auto power off : Approx. 10 minutes) *Continuous measuring time : AC A Approx. 46 hours DC A Approx. 52 hours
Dimension	161(L) \times 40(W) \times 30(D)mm
Weight	110g (including batteries)
Accessories	9113(Carrying case), Batteries, Instruction manual




KEW 2300R can be used in crowded connection boxes, where cables are very short, and space is too limited to clamp cables using a traditional clamp meter.

LEAKAGE CLAMP METERS

ADVANTAGES USING THE KYORITSU LEAKAGE CLAMP METERS:

- Work professionally: No need random check to identify the fault that causes RCD tripping. In fact our leakage clamp meters measure exactly the same leakage current to earth / ground detected by RCD. Once you measured it, you trace and find it. It is like to have an RCD "built-in" your clamp meter, nothing will trip on it but you will measure the leakage current on its display!
- Easy to use, you just need to clamp:
 - all active conductors (for leakage current measurements)
 - or just one phase (for the AC load current measurements, like the conventional clamp meters ranging up to 100 / 200 / 400 or 1000A, depends on the model).
- Before starting any action, clamping the active conductors at the origin of the electrical installation: you will immediately know if there is a leakage current to earth / ground.
- Then you will trace the leakage current clamping every secondary circuit one by one and without disconnecting the conductors in the junction boxes (see the below example).
- No wasting time because using these special clamp meters you will find out the fault without turning OFF the power line.
- When there are more than one fault, that only the sum of them causes the RCD tripping, such clamp meters are even more useful for a definitive solution.
- An essential tool to identify the causes of leakage current to earth / ground, you will appreciate it since the first use!

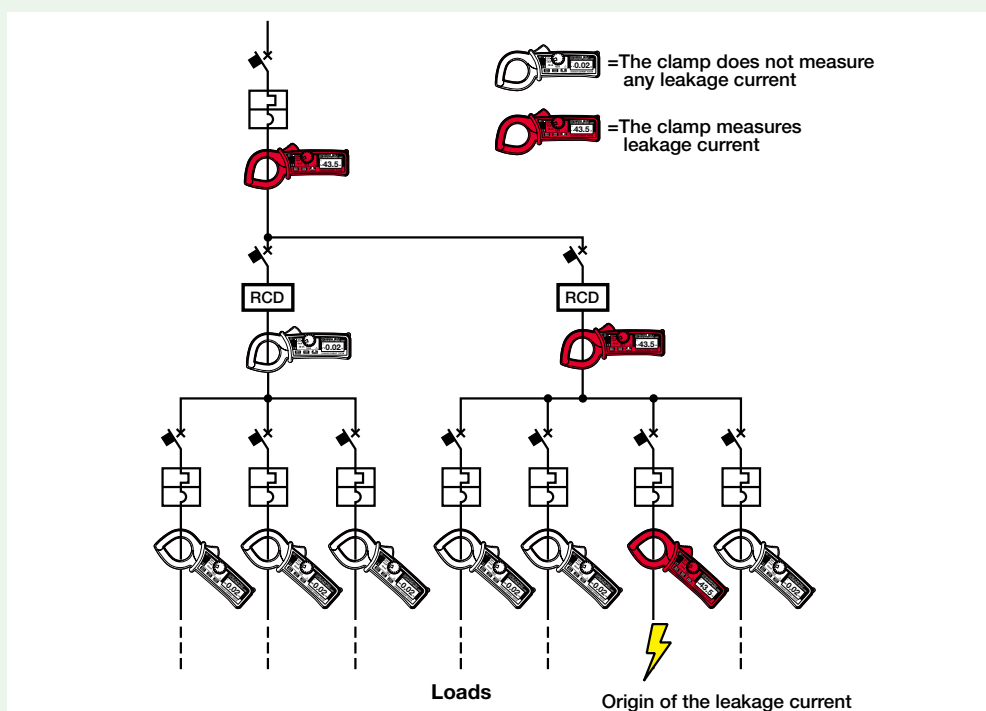

High frequency selector switch

All the leakage clamp meters of Kyoritsu have a frequency response selector switch that allows you to determine the level of earth / ground leakage current including or not the high frequency.

In other words, it can help to identify the "traditional" leakage current at 50/60 Hz (generated by low insulation condition of motors, of old lightings, of cables, etc) and the "high frequency" leakage current (generated by PC, inverters, UPS, harmonics, etc).

Therefore this feature is very helpful for a quick judgment: the leakage is due to poor insulation resistance or due to problems with devices that work with high frequency.

CLAMP SENSOR/CLAMP ADAPTER

KEW 8115

CLAMP SENSOR

Ø12 AC MAX 130A DC MAX 180A DC AC A AUTO POWER OFF



CE

- Clamp sensor for AC/DC current measurement compatible with digital multimeters

	8115	
Measuring range	0.1 to 130Arms AC	0 to ±180A DC
Output voltage	10mV/A AC	10mV/A AC
Accuracy	±1.2%rdg±0.4mV (50/60Hz) ±2.5%rdg±0.4mV (40Hz to 1kHz)	±1.2%rdg±0.4mV (*)
Low battery warning	2.2±0.2V or less - Red LED flash (1.9±0.2V - Automatically power off)	
Conductor size	φ12mm max.	
Operating temperature & humidity range	-10 to 55°C, relative humidity 85% or less (no condensation)	
Output impedance	Approx. 10Ω or less	
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2, IEC 61010-2-032, IEC 61326-1	
Power source	LR03(AAA)(1.5V) × 2 Continuous use: Approx. 40 hours(Auto power off: Approx. 20 minutes)	
Cord length	Approx. 1,200mm	
Output connector	φ4mm banana plug	
Dimension	127(L) × 42(W) × 22(D) mm	
Weight	Approx. 140g	
Accessories	9095(Carrying case), Batteries, Instruction manual	

*This accuracy is defined after the completion of zero adjustment under connection to a DMM.

MODEL 8112

CLAMP ADAPTER

Ø8 MAX 120A AC A



CE

MODEL 8112 clamp adapter is designed as an AC current/voltage conversion probe capable of measuring AC current from 0.1mA to 120A in conjunction with digital multimeters

	8112			
Range	Measuring ranges	Output voltage	Accuracy	Frequency response
200mA	0 to 500mA AC	1V/A AC	±1.5%rdg±0.2mA	50Hz to 1kHz
	0 to 1000mA AC	(1000mA→1V)	±3%rdg±0.4mA	40Hz to 10kHz
2A	0 to 20A AC	100mV/A AC	±1%rdg±1mA	40Hz to 1kHz
		(20A→2V)	±1.5%rdg±2mA	1 to 10kHz
20A	0 to 20A AC	10mV/A AC	±1%rdg±0.01A	40Hz to 1kHz
	20 to 60A AC	(120A→1.2V)	±2.5%rdg	50Hz to 10kHz
	60 to 120A AC		±2.5%rdg	100Hz to 10kHz
Conductor size	φ8mm max.			
Frequency characteristics	30Hz to 100kHz(-3dB)			
Applicable standards	IEC 61010-1 CAT II 100V Pollution degree 2			
Dimension	153(L) × 18(W) × 23(D)mm			
Weight	Approx. 100g			
Accessories	9095(Carrying case) Instruction manual			

KEW 8161

CLAMP SENSOR

Ø24 MAX 100A AC A




CE

- Clamp sensor for AC current measurement compatible with digital multimeters



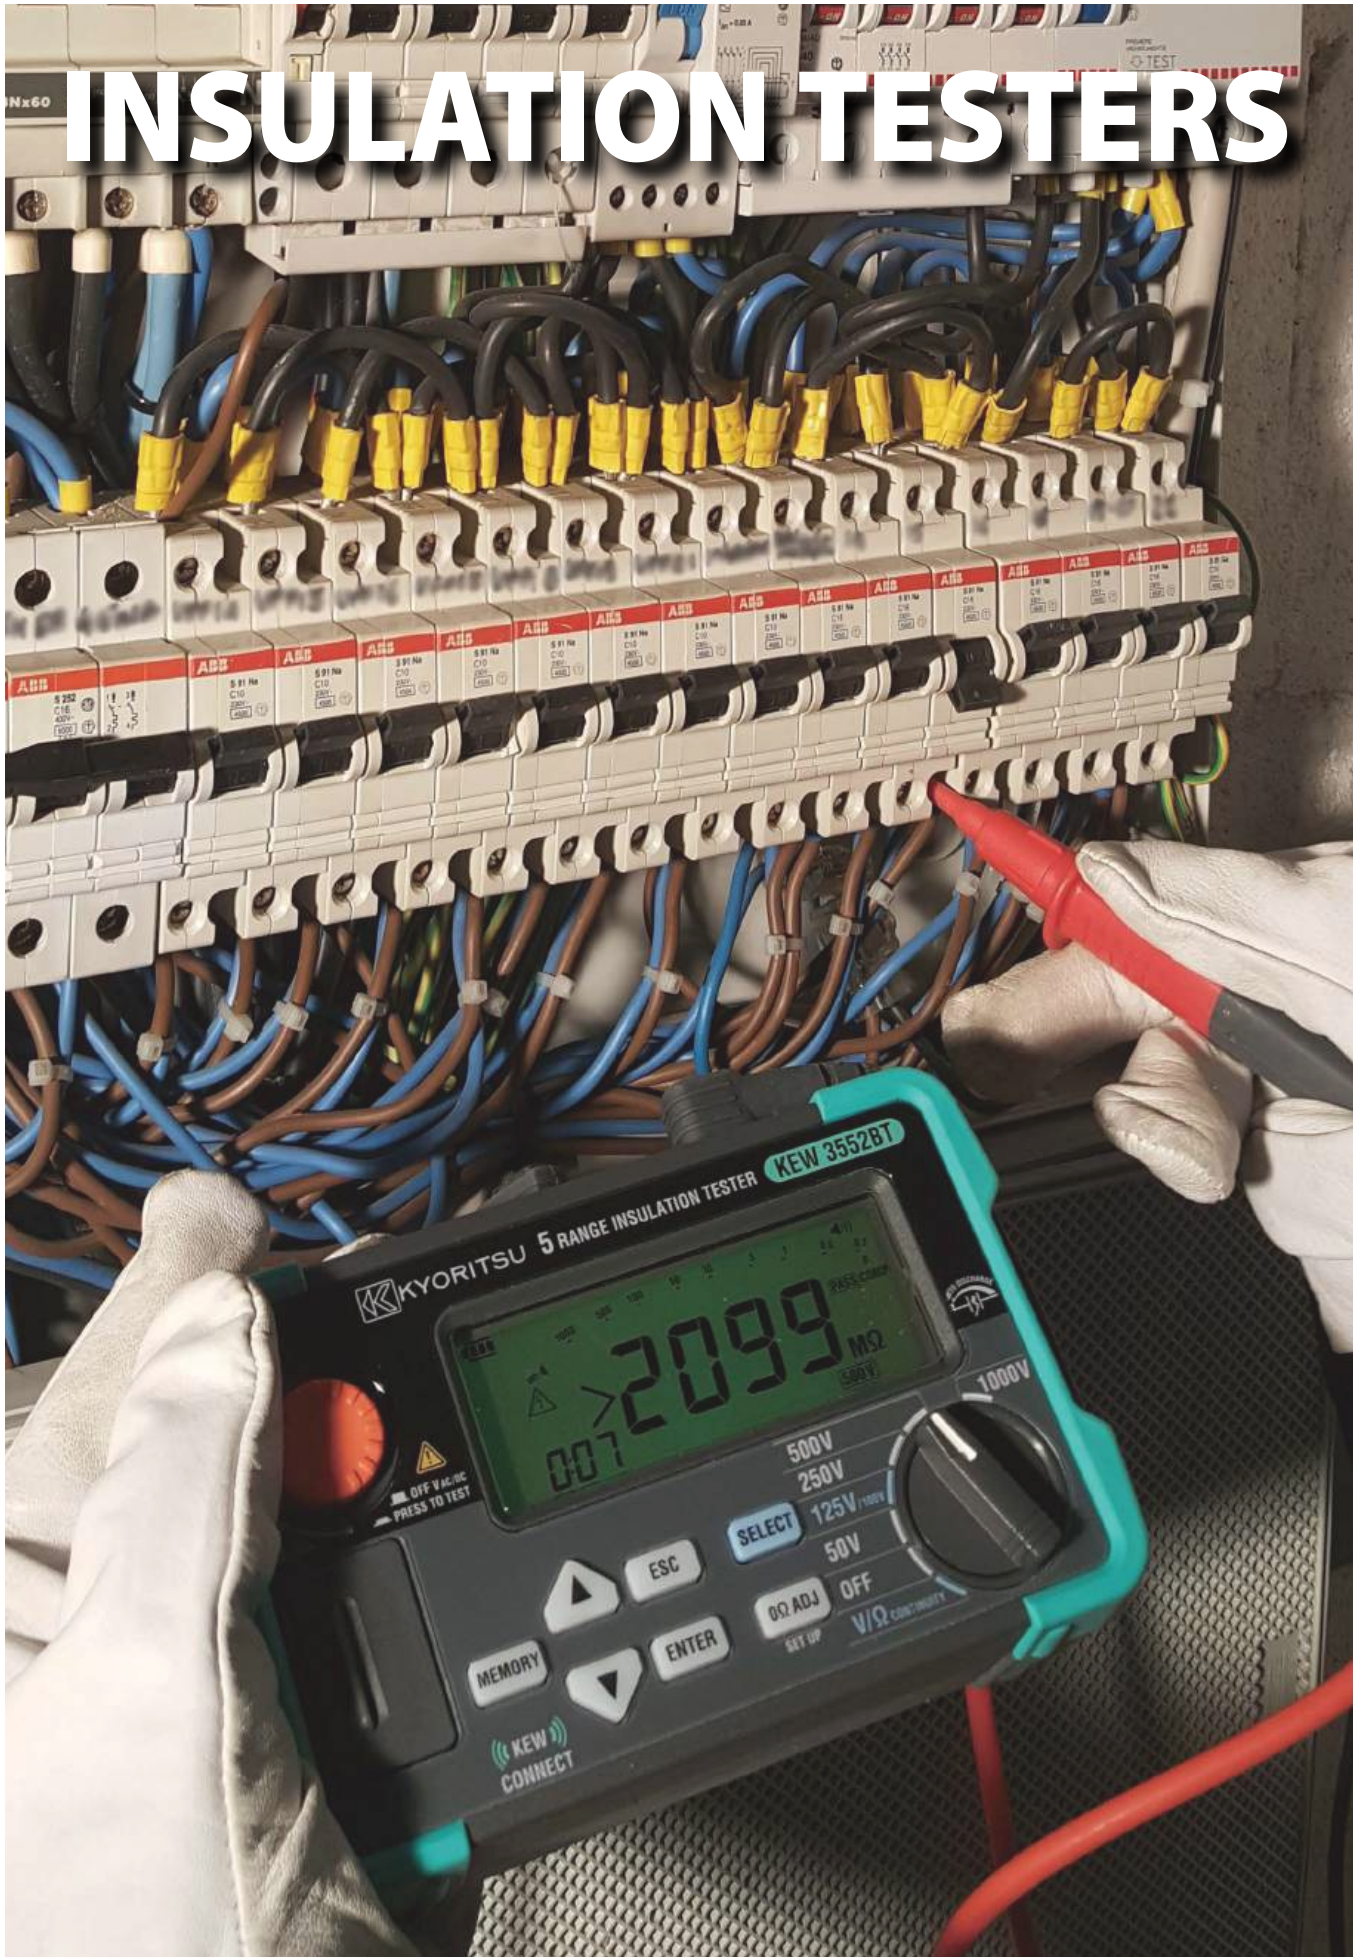


	8161
Measuring range	0 to 100A AC
Output voltage	1000mV/100A AC(10mV/A)
Accuracy	±2.0%rdg±3.0mV (45 to 65Hz) ±2.5%rdg±3.0mV (65Hz to 1kHz)
Conductor size	φ24mm max.
Operating temperature & humidity range	-10 to 50°C, relative humidity 85% or less(no condensation)
Output impedance	22Ω or less
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-032, IEC 61326-1,2-2
Withstand voltage	3470Vrms AC (50/60Hz)for 5 sec.
Insulation resistance	50MΩ or greater at 1000V
Output connector	22Ω or less
Dimension	97(L) × 59(W) × 26(D)mm
Cable length	Approx. 1.2m
Weight	Approx. 120g
Accessories	Instruction manual






INSULATION TESTERS









INSULATION TESTERS

Selection Guide of Insulation Testers

	Analog Insulation Testers				Analog Insulation/Continuity Testers	
	3165	3166	3161A	3431	3131A	3132A
Appearance	 photo : 3165					
Test voltage	1 range		2 ranges	3 ranges		
Rated voltage (Max measurement value)	500V(1000MΩ)	1000V(2000MΩ)	15V(20MΩ) 500V(100MΩ)	250V(200MΩ) 500V(200MΩ) 1000V(2000MΩ)	250V(100MΩ) 500V(200MΩ) 1000V(400MΩ)	250V(100MΩ) 500V(200MΩ) 1000V(400MΩ)
Continuity	—	—	—	—	2/20Ω	3/500Ω
AC Voltage	600V	600V	600V	600V	—	600V
DC Voltage	—	—	—	600V	—	—
Backlight	—	—	✓	✓	✓	—
Power source	R6 × 4	R6 × 4	R6 × 4	LR6 × 4	R6 × 6	R6 × 6
Dimension (L) × (W) × (D)mm	90 × 137 × 40	90 × 137 × 40	90 × 137 × 40	97 × 156 × 46	167 × 185 × 89	106 × 160 × 72
Weight(Approx.)	330g	330g	340g	430g	860g	560g

	Digital Insulation/Continuity Testers				
	3005A	3007A	3551	3552	3552BT
Appearance					
Test voltage	3 ranges		6 ranges		
Rated voltage (Max measurement value)	250V(2000MΩ) 500V(2000MΩ) 1000V(2000MΩ)	250V(2000MΩ) 500V(2000MΩ) 1000V(2000MΩ)	50V(100MΩ) 100V(200MΩ) 125V(250MΩ) 250V(500MΩ) 500V(2000MΩ) 1000V(4000MΩ)	50V(100MΩ) 100V(200MΩ) 125V(250MΩ) 250V(500MΩ) 500V(20GΩ) 1000V(40GΩ)	50V(100MΩ) 100V(200MΩ) 125V(250MΩ) 250V(500MΩ) 500V(20GΩ) 1000V(40GΩ)
Continuity	20/200/2000Ω	20/200/2000Ω	40/400/4000Ω	40/400/4000Ω	40/400/4000Ω
Continuity buzze	✓	✓	✓	✓	✓
AC Voltage	600V	600V	2.0 to 600V	2.0 to 600V	2.0 to 600V
DC Voltage	—	—	-2.0 to -600V 2.0 to 600V	-2.0 to -600V 2.0 to 600V	-2.0 to -600V 2.0 to 600V
Backlight	—	✓	✓	✓	✓
Communication interface	—	—	—	USB	USB, Bluetooth®
Power source	R6 × 8	R6 × 8	LR6 × 4	LR6 × 4	LR6 × 4
Dimension (L) × (W) × (D)mm	167 × 185 × 89	167 × 185 × 89	97 × 156 × 46	97 × 156 × 46	97 × 156 × 46
Weight(Approx.)	970g	990g	490g	490g	490g

	Analog High Voltage Insulation Testers			Digital High Voltage Insulation Testers		
	3121B/3122B	3123A	3124A	3025B/3125B	3127	3128
Appearance	 photo : 3121B			 photo : 3125B		
Test voltage	1 range	2 ranges	Variable	3025B: 4 ranges 3125B: 5 ranges	5 ranges	6 ranges(Variable)
Rated voltage (Max measurement value)	3121B: 2500V(100GΩ) 3122B: 5000V(200GΩ)	5000V(200GΩ) 10000V(400GΩ)	1000V(100MΩ) 1 to 10kV(100GΩ)	250V(100MΩ) 500V(1000MΩ) 1000V(199GΩ) 2500V(100GΩ) 5000V(1000GΩ)*	250V(9.99GΩ) 500V(99.9GΩ) 1000V(199GΩ) 2500V(999GΩ) 5000V(9.99TΩ)	500V(500GΩ) 1000V(1TΩ) 2500V(2.5TΩ) 5000V(5TΩ) 10000V(35TΩ) 12000V(35TΩ)
AC/DC Voltage	—	—	—	30 to 600V AC/DC	30 to 600V AC/DC	30 to 600V AC/DC
Current	—	—	—	—	0.00nA to 5.50mA	5.00nA to 2.40mA
Capacitance	—	—	—	—	5.0nF to 50.0μF*	5.0nF to 50.0μF*
Backlight	—	—	—	✓	✓	✓
Communication interface	—	—	—	—	USB, Bluetooth®	USB
Power source	LR14 × 8	R6 × 8	Ni-MH rechargeable battery(1.2V) × 8	LR14 × 8	Rechargeable lead storage battery (12V)	Rechargeable lead storage battery (12V)
Dimension (L) × (W) × (D)mm	177 × 226 × 100	200 × 140 × 80	200 × 140 × 80	177 × 226 × 100	380 × 430 × 154 (Instrument and Hard case)	330 × 410 × 180 (Instrument and Hard case)
Weight(Approx.)	3121B: 1600g 3122B: 1700g	1000g	1600g	3025B: 1700g 3125B: 1900g	8000g	9000g

*3125B only

*At 5000V range 5.0nF to 25.0μF

*At 10000/12000V range 40.0nF to 1.00μF

DIGITAL INSULATION/CONTINUITY TESTERS

MODEL 3005A



AUTO POWER OFF



- Bar graph to display insulation resistance
- Displays the value of external AC voltage with flashing symbol
- Auto null function to automatically subtract the test lead resistance before displaying the real continuity resistance value
- Live circuit warning buzzer
- Releasing the test button automatically discharges the charges stored in the circuit under test
- 200mA measuring current on continuity testing

	3005A
Insulation resistance	
Test voltage	250/500/1000V
Measuring ranges	20/200/2000MΩ
Output voltage on open circuit	Rated test voltage +20%, -0%
Nominal current	1mA DC min.
Output short circuit current	Approx. 1.5mA DC
Accuracy	$\pm 1.5\% \text{rdg} \pm 5 \text{dgt} (20/200 \text{M}\Omega)$ $\pm 10\% \text{rdg} \pm 3 \text{dgt} (2000 \text{M}\Omega)$
Continuity test	
Measuring ranges	20/200/2000Ω
Output voltage on open circuit	7 to 12V DC
Measuring current	200mA DC min.
Accuracy	$\pm 1.5\% \text{rdg} \pm 5 \text{dgt} (20\Omega)$ $\pm 1.5\% \text{rdg} \pm 3 \text{dgt} (200/2000\Omega)$
AC voltage	
AC voltage range	0 to 600V AC
Accuracy	$\pm 5\% \text{rdg} \pm 3 \text{dgt}$
General	
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-034, IEC 61557-1,2,4 IEC 60529(IP54), IEC 61326-1(EMC)
Power source	R6(AA)(1.5V) × 8
Dimension	167(L) × 185(W) × 89(D)mm
Weight	Approx. 970g
Accessories	7122B(Test leads), 9074(Cord case) 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare) 9121(Shoulder strap) Batteries, Instruction manual

Selection Guide

	3005A	3007A
200mA continuity range	✓	✓
Live circuit warning	✓	✓
Backlight	—	✓
Automatic discharge	✓	✓
Trac-Lok for extended battery life	—	✓

Accessory



MODEL 3007A



AUTO POWER OFF



- Bar graph to display insulation resistance
- Displays the value of external AC voltage with flashing symbol
- Auto null function to automatically subtract the test lead resistance before displaying the real continuity resistance value
- Trac-Lok mode to conserve battery life on insulation and continuity tests
- Live circuit warning buzzer
- Releasing the test button automatically discharges the charges stored in the circuit under test
- Backlight function to view the test results in dimly lit areas
- 200mA measuring current on continuity testing

	3007A
Insulation resistance	
Test voltage	250/500/1000V
Measuring ranges	20/200/2000MΩ
Output voltage on open circuit	Rated test voltage +20%, -0%
Nominal current	1mA DC min.
Output short circuit current	1.5mA DC approx.
Accuracy	$\pm 1.5\% \text{rdg} \pm 5 \text{dgt} (20/200 \text{M}\Omega)$ $\pm 10\% \text{rdg} \pm 3 \text{dgt} (2000 \text{M}\Omega)$
Continuity test	
Measuring ranges	20/200/2000Ω
Output voltage on open circuit	7 to 12V DC
Measuring current	200mA DC min.
Accuracy	$\pm 1.5\% \text{rdg} \pm 5 \text{dgt} (20\Omega)$ $\pm 1.5\% \text{rdg} \pm 3 \text{dgt} (200/2000\Omega)$
AC voltage	
AC voltage range	0 to 600V AC
Accuracy	$\pm 5\% \text{rdg} \pm 3 \text{dgt}$
General	
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-034, IEC 61557-1,2,4 IEC 60529(IP54), IEC 61326-1(EMC)
Power source	R6(AA)(1.5V) × 8
Dimension	167(L) × 185(W) × 89(D)mm
Weight	Approx. 990g
Accessories	7122B(Test leads), 9074(Cord case) 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare) 9121(Shoulder strap) Batteries, Instruction manual

Accessories



DIGITAL INSULATION/CONTINUITY TESTERS

KEW 3551/3552/3552BT




photo : 3552BT

- World's fastest class measurement speed (0.5 sec.)
- 6 ranges are available for insulation resistance test (50/100/125/250/500/1000V)
- Various lineup definitely fulfills your needs

**KEW
CONNECT**

Using our Application the measurements can be taken and automatically saved, reducing the necessity to take notes in the field. (3552BT only)



3551/3552/3552BT						
Insulation resistance						
Test voltage	50V	100V	125V	250V	500V	1000V
Measuring range (Auto-ranging)	4.000/40.0/ 100.0MΩ	4.000/40.0/ 200.0MΩ	4.000/40.0/ 250.0MΩ	4.000/40.0/ 400.0/500.0MΩ	4.000/40.0/ 400.0/2000MΩ /20GΩ*1	4.000/40.0/ 400.0/4000MΩ /40GΩ*1
Mid-scale value	2MΩ	5MΩ		10MΩ	100MΩ	200MΩ
First effective measuring range	0.100 to 10.00MΩ	0.100 to 20.00MΩ	0.100 to 25.00MΩ	0.100 to 50.0MΩ	0.100 to 500MΩ	0.100 to 1000MΩ
Accuracy	±2%rdg±2dgt					
Second effective measuring range	0.050 to 0.099MΩ	10.01 to 100.0MΩ		25.01 to 250.0MΩ	50.1 to 500MΩ	501 to 2000MΩ
Accuracy	±5%rdg(0.050 to 0.099MΩ:±2%±4dgt)					
Rated current	1.0 to 1.1mA					
	@0.05MΩ	@0.1MΩ	@0.125MΩ	@0.25MΩ	@0.5MΩ	@1MΩ
Output short circuit current	1.5mA max.					
Ω/Continuity ²						
Resistance range	40.00/400.0/4000Ω (Auto-ranging)					
Accuracy	±2.5%rdg±8dgt					
Open-circuit voltage	5V(4 to 6.9V)					
Measuring current	200mA or more					
Voltage						
Range	2.0 to 600V AC(45 to 65Hz) / ±2.0 to ±600V DC					
Accuracy	±1%rdg±4dgt					
General						
Applicable standards	IEC 61010 CAT III 600V / CAT IV 300V, IEC 61010-2-034 IEC 61557-1,2,4, IEC 61326-1,2-2, IEC 60529(IP40)					
Communication interface	USB*1, Bluetooth®5.0 ³					
Dimension/Weight	97(L)x156(W)x46(D)mm / Approx. 490g (including battery)					
Power source	LR6/R6(AA)(1.5V) x 4					
Accessories	7260(Test lead with remote control switch), 7261A(Test lead with alligator clip) 8017A(Extension prod long), 9173(Carrying case), 9121(Shoulder strap), Batteries, Instruction manual					
Optional accessories	9186A(Carrying case), 9187(Cord case), 7243A(L-shaped probe), 8016(Hook type prod) 8212-USB(USB adapter)*1					

*1 3552/3552BT only *2 Low-resistance range is protected by a built-in fuse (0.5A/1000V, Dia. 6.3 x 32mm)

*3 3552BT only
Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®.
Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

Diagnostic Insulation Tests



PI

Polarization Index

PI = $\frac{\text{Insulation resistance value 10 min. after start}}{\text{Insulation resistance value 1 min. after start}}$

PI	4.0 or more	4.0 to 2.0	2.0 to 1.0	1.0 or less
Criteria	Best	Good	Warning	Bad



DAR

Dielectric Absorption Ratio

DAR = $\frac{\text{Insulation resistance value 1 min. after start}}{\text{Insulation resistance value 15 sec. after start}}$

DAR	1.4 or more	1.25 to 1.0	1.0 or less
Criteria	Best	Good	Bad

LED light & Display backlight

Facilitate working at dimly illuminated location.
Automatic sensor turns the LCD backlight and LED spot light ON/OFF.



Memory/data transfer function (available on KEW 3552/3552BT)

Internal memory up to 1000 measurements can be transferred to a PC by the optional adapter 8212-USB.
*Please download the software from our website.

Accessories



MODEL 7260

Test lead with remote control switch



MODEL 7261A

Test lead with alligator clip



MODEL 8017A

Extension prod long



MODEL 9173

Carrying case



MODEL 9121

Shoulder strap

Optional accessories



MODEL 7243A

L-shaped probe



MODEL 8212-USB

USB adapter



MODEL 9186A

Carrying case



MODEL 9187

Cord case



MODEL 8016

Hook type prod

ANALOG INSULATION/CONTINUITY TESTERS

MODEL 3131A



CE

- Three insulation test ranges: 250V/100MΩ, 500V/200MΩ, 1000V/400MΩ
- LIVE circuit warning lamp plus audible warning
- Automatic discharge of circuit capacitance when TEST button is released
- Fuse protected (continuity range only)
- Battery check LED
- Zero adjustment on panel
- Backlight function to facilitate working at dimly lit situations
- PRESS TO TEST button with lock down feature

	3131A
Insulation resistance	
Test voltage	250/500/1000V
Measuring ranges (Mid-scale value)	100/200/400MΩ (1/2/4MΩ)
Output voltage on open circuit	Rated test voltage +20%, -0%
Nominal current	1mA DC min.
Output short circuit current	Approx. 1.3mA DC
Accuracy	0.1 to 10/0.2 to 20/0.4 to 40MΩ (Accuracy guaranteed ranges) ±5% of indicated value
Continuity	
Measuring ranges (Mid-scale value)	2/20Ω (1/10Ω)
Output voltage on open circuit	4 to 9V DC
Measuring current	200mA DC min.
Accuracy	±3% of scale length
General	
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-034, IEC 61557-1,2,4 IEC 60529(IP54), IEC 61326-1(EMC)
Power source	R6(AA)(1.5V) × 6
Dimension	167(L) × 185(W) × 89(D)mm
Weight	Approx. 860g
Accessories	7122B(Test leads), 9074(Cord case) 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare) 9121(Shoulder strap), Batteries, Instruction manual

MODEL 3132A




CE

- Dust and Drip-proof construction (designed to IEC 60529 IP54)
- Designed to meet IEC 61010-1 and IEC 61557 safety standard
- 1mA rated test current at the minimum resistance
- 200mA measuring current on continuity testing
- Automatic discharge of circuit capacitance (Any charge stored in the circuit under test will be automatically discharged after testing)
- Live circuit warning buzzer and neon lamp
- Small and lightweight. Shock resistant new case material
- AC voltmeter with linear, easy-to-read scale
- Operates on AA, R6 × 6 dry batteries

	3132A
Insulation resistance	
Test voltage	250/500/1000V
Measuring ranges (Mid-scale value)	100/200/400MΩ (1/2/4MΩ)
Output voltage on open circuit	Rated test voltage +20%, -0%
Nominal current	1mA DC min.
Output short circuit current	1 to 2mA DC
Accuracy	0.1 to 10/0.2 to 20/0.4 to 40MΩ (Accuracy guaranteed ranges) ±5% of indicated value
Continuity	
Measuring ranges (Mid-scale value)	3/500Ω (1.5/20Ω)
Output voltage on open circuit	Approx. 4.1V DC
Measuring current	210mA DC min.
Accuracy	±1.5% of scale length
AC voltage	
AC voltage range	0 to 600V AC
Accuracy	±5% of scale length
General	
Applicable standards	IEC 61010-1 CAT III 600V Pollution degree 2 IEC 61010-2-034, IEC 61557-1,2,4 IEC 60529(IP54), IEC 61326-1(EMC)
Power source	R6(AA)(1.5V) × 6
Dimension	106(L) × 160(W) × 72(D)mm
Weight	Approx. 560g
Accessories	7122B(Test leads)*1, 9074(Cord case) 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare) 9121(Shoulder strap), Batteries, Instruction manual

*1 7217A(For Australia)

Accessories

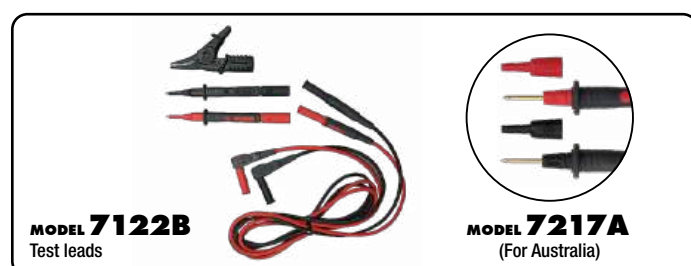

Selection Guide

	3131A	3132A
3 range insulation test voltage	✓	✓
200mA continuity	✓	✓
Live circuit warning	✓	✓
AC voltage range	–	✓
Illuminated scale	✓	–
Automatic discharge	✓	✓
IP54 rating	✓	✓

ANALOG INSULATION TESTERS

- Compact and lightweight insulation tester
It weighs only 340g(battery included), but carries full measurement functions
- Automatic discharge of circuit capacitance
- Test leads with remote control switch
- New robust housing case
- Backlight function

- 500V/1000M Ω (3165)
- 1000V/2000M Ω (3166)
- Expanded megohm scale for easy reading
- New robust housing case to prevent damage
- AC voltmeter scale for easy reading

photo : 3165

- Compact and lightweight design
- Scale light and LED spot light to facilitate working at dimly illuminated location or at nighttime work
- Built-in illuminance sensor automatically turns lights on and off
- Test lead with remote control switch set is supplied as standard accessory
- Live circuit warning with blinking LED and buzzer

39

Why insulation test is necessary?

All live conductors of electrical appliances and installations must be insulated to prevent electric shock hazards from inadvertent contact, fire hazards from short circuit and equipment damage. In addition, a low insulation resistance in installation will result in a leakage current, and hence causes a waste of energy which would increase the running costs of the installation. Insulation resistance must be checked by applying appliances or installations a higher voltage than its normal working voltage,

because an insulation resistance is lower at higher voltage than at lower voltage. Kyoritsu's insulation resistance testers provide measurement at high levels of test voltages. Periodical test is also important to ensure that insulation of installations or appliances is not deteriorating. Foreign matter and mechanical factors like wear or breakage may reduce insulation resistance. Regular tests and data logs can detect possible fault in insulation.

Standards and applications

The International Standard of Electrical Installation of Buildings IEC 60364 has a dedicated section named "Verification". This can be found in part 6. This section stipulates minimum values for the insulation resistance, measured with a particular test voltage, with no equipment connected to the circuits.

Nominal circuit voltage	Test voltage in d.c. applied by Insulation tester	Insulation resistance value
SELV, PELV ($\leq 50V$ a.c. $\leq 120V$ d.c.)	250V	$\geq 0.5M\Omega$
Up to and including 500 V (including FELV) with the exception of the above cases	500V	$\geq 1M\Omega$
Above 500V	1000V	$\geq 1M\Omega$

The testing apparatus (insulation testers) have to be capable of supplying an output current of at least 1mA at its nominal test voltage.

According to IEC 60364, a typical for 230/400V electrical installation (excluding SELV and PELV), requires that the insulation resistance at a test voltage of 500 V d.c. is larger than 1 M Ω .

A test voltage of 1000V can be used for testing the insulation resistance of large electric motors, switchboards, industrial processing machines, devices and circuits with voltages exceeding 500V (but below 1000V a.c. and 1500V d.c.).

A test voltage lower than 250V (for example 15V, 50V, 100V and 125V) may be available in some insulation testers for testing the insulation resistance in telecommunication devices and circuits, security devices, local networks, speech (audio) devices, delicate electronic circuits and PCBs.

Insulation Testing Methods

■ Measurement of Insulation resistance between live conductors (A)

Prior to testing, make sure that the circuit or part of the installation to be tested is disconnected from the mains supply and not energized. It is also necessary to ensure: the point of the installation to be checked is not open due to other equipment incorporated, the load connected with a fixed load and socket outlet is disconnected from the mains supply, and relay coils, fluorescent lamps, etc do not produce continuity between conductors. Circuits or components likely to be damaged by insulation test voltage must be removed from the circuit under test. If they cannot be disconnected, an alternative testing method is to measure insulation resistance between live conductors and earth.


■ Measurement of insulation resistance between live conductors and earth (B)

The test must be carried out with equipment always disconnected, i.e., with the mains switch open it must be disconnected from the mains supply. Earth terminal must be connected to earth and Line terminal to a live conductor or conductors. Where there is insulation deterioration or an indoor electrical installation is not partly or totally insulated a variety of electric hazards may be anticipated.

To give some of the examples;

- Leakage current dangerous to the human body will develop. This is particularly the case with equipment that has no good earth and therefore is not properly protected against the potential difference.
- Overheating of conductors due to the leakage of current or microscopic discharging will cause short circuits or fires.
- RCDs will trip, with resulting damage to the equipment which will also cause short circuits and fires.

Kyoritsu's dedicated leakage clamp meters MODEL 2431, 2432, 2433, 2433R, 2434, KEW 2413F and 2413R will be very helpful in identifying the possible causes of such accidents.

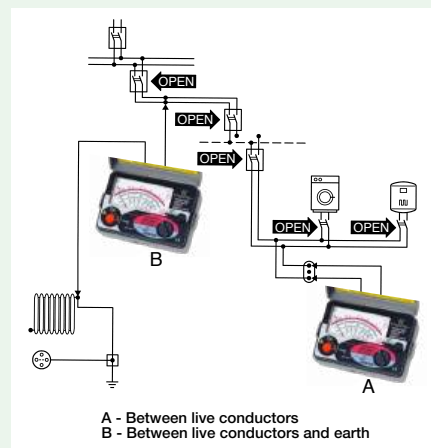

HIGH VOLTAGE INSULATION TESTERS

2500V 5000V
KEW 3121B/3122B



photo : 3121B

- Easy and simple operation
- Automatic ranges, indicated by different LEDs
- Newly-designed alligator clip
- It comes with a tough hard case
- Safety standard IEC 61010-1 CAT IV 300V



photo : 3122B

	3121B	3122B
Test voltage	2500V	5000V
Measuring ranges (automatic change)	2/100GΩ (Auto-ranging)	5/200GΩ (Auto-ranging)
First effective measuring ranges	0.1 to 50GΩ	0.2 to 100GΩ
Accuracy	±5%rdg	
Other ranges accuracy	±10%rdg or 0.5% of scale length	
Short circuit current	0.08mA	
Applicable standards	IEC 61010-1, IEC 61010-2-030 CAT IV 300V / CAT III 600V Pollution degree 2, IEC 61010-2-034 IEC 61326-1, IEC 61326-2-2(EMC), IEC 60529(IP40)	
Power source	12V DC:LR14 × 8	
Dimension	177(L) × 226(W) × 100(D) mm	
Weight	Approx. 1.6kg	Approx. 1.7kg
Accessories	7165A(Line probe), 7264(Earth cord) 7265(Guard cord), 8019(Hook type prod) 9182(Carrying case[Hard]), Batteries, Instruction manual	7165A(Line probe), 7264(Earth cord) 7265(Guard cord), 8019(Hook type prod) 9183(Carrying case[Hard]), Batteries, Instruction manual
Optional accessories	7168A(Line probe with alligator clip), 7253(Longer line probe with alligator clip), 8324(Adapter for recorder)	

Accessories



MODEL 7165A
Line probe
3,000mm



MODEL 7264
Earth cord
3,000mm



MODEL 7265
Guard cord
3,000mm



MODEL 8019
Hook type prod



MODEL 9182/9183
Carrying case [Hard]
9182(3121B)/9183(3122B)

Optional accessories



MODEL 7168A
Line probe with alligator clip
3,000mm

MODEL 7253
Longer line probe
with alligator clip
15m



MODEL 8324
Adapter for recorder
(Output 10mV/1μA)
Cable length:
200mm connector side
1,100mm alligator clip side



HIGH VOLTAGE INSULATION TESTERS

10000V
KEW 3123A



	3123A	
Test voltage	5000V	10000V
Measuring ranges (automatic change)	5/200GΩ (Auto-ranging)	10/400GΩ (Auto-ranging)
First effective measuring ranges	0.2 to 100GΩ	0.4 to 200GΩ
Accuracy	±5%rdg	
Other ranges accuracy	±10%rdg or 0.5% of scale length	
Power source	R6(AA)(1.5V) × 8	
Dimension	200(L) × 140(W) × 80(D)mm	
Weight	Approx. 1kg	
Accessories	7165A(Line probe), 7224A(Earth cord) 7225A(Guard cord), 8019(Hook type prod) 9158(Carrying case [Hard]), Batteries, Instruction manual	
Optional accessories	7253(Longer line probe with alligator clip) 7168A(Line probe with alligator clip) 8324(Adapter for recorder)	

- Rugged design with a hard carrying case for field use
- Detachable High Voltage Line probe
- Automatic ranges, high and low scales, indicated by different LEDs
- Drip-proof
- Auto-discharge function

Accessories



MODEL 7165A
Line probe 3,000mm



MODEL 7224A
Earth cord 1,500mm



MODEL 7225A
Guard cord 1,500mm



MODEL 8019
Hook type prod



MODEL 9158
Carrying case [Hard]

Optional accessories



MODEL 7168A
Line probe with alligator clip 3,000mm




MODEL 7253
Longer line probe with alligator clip 15m

MODEL 8324
Adapter for recorder
(Output 10mV/1μA)
Cable length:
200mm connector side
1,100mm alligator clip side



Use of Guard Terminal

Illustrated in this Fig. is an example of the insulation resistance measurement of an electric wire. If the line probe is simply connected to the wire conductor and the earth lead to the immersion liquid container as shown, a measurement error will be introduced as this results in the measurement of the combined resistance of insulation resistance and the surface leakage resistance at the cut end of the electric wire. In order to remove this surface leakage current, wind a guard wire around the cut end of the conductor and connect it to the guard terminal of the instrument using the guard lead. Then, the surface leakage current will bypass the indicating meter of the insulation resistance tester.



10000V
KEW 3124A



External Power Supply

	3124A	
Test voltage	1 to 10kV variable	1000V
Measuring ranges (automatic change)	1.6/100GΩ (Auto-ranging)	100MΩ
First effective measuring ranges	0.05 to 50GΩ	1 to 100MΩ
Accuracy	±10%rdg	
Other ranges accuracy	±1% of scale length*1	
Output voltage and set voltage indicate	0 to 10kV DC ±2%rdg±2dgt	
Power source	Ni-MH rechargeable battery(1.2V) × 8	
Dimension	200(L) × 140(W) × 80(D)mm	
Weight	Approx. 1.6kg	
Accessories	7082(Leads for recorder), 7083(Leads for battery charging) 7084(Earth and guard leads), 9176(Carrying case[Hard]) 8266(Battery charger[120V]) or 8267(Battery charger[220V]) or 8264A(Battery charger[AU]) 8268(Ni-MH rechargeable battery × 8), Instruction manual	

*1 With measurement voltage less than 2kV, 0 to 100GΩ is not guaranteed accuracy

Accessories



MODEL 7082
Leads for recorder
1,100mm



MODEL 7083
Leads for battery charging
5,200mm



MODEL 7084
Earth and guard leads
5,000mm



MODEL 9176
Carrying case[Hard]

Battery charger

MODEL 8266
120V



MODEL 8267
220V



MODEL 8264A
AU type



- Permits a wide range of insulation testing up to 100GΩ at variable test voltage from 1kV to 10kV
- DC voltage output for recorders
- Output voltage is shown on the digital display
- After tests, automatically discharges the charges stored in the circuit under test
- Operates with Ni-MH rechargeable batteries



HIGH VOLTAGE INSULATION TESTERS

2500V

5000V

KEW **3025B/3125B**



photo : 3125B

DC V AC V AUTO POWER OFF

- Large digital display with Bar Graph indication and backlight
- Polarization Index measurement(PI)
- Dielectric Absorption Ratio(DAR)
- Indication of Output voltage and Discharge voltage
- Safety standard IEC 61010-1 CAT IV 300V / CAT III 600V



photo : 3025B



	3025B/3125B					
Range	Insulation resistance					Voltage measurement
Test voltage	250V	500V	1000V	2500V	5000V*1	
Measuring range	0.0 to 100.0MΩ	0.0 to 99.9MΩ 80 to 1000MΩ	0.0 to 99.9MΩ 80 to 999MΩ 0.80 to 2.00GΩ	0.0 to 99.9MΩ 80 to 999MΩ 0.80 to 9.99GΩ 8.0 to 100.0GΩ	0.0 to 99.9MΩ 80 to 999MΩ 0.80 to 9.99GΩ 8.0 to 99.9GΩ 80 to 1000GΩ	30 to 600V AC/DC (50/60Hz)
Accuracy	±5%rdg±3dgt	±5%rdg±3dgt	±5%rdg±3dgt	±5%rdg±3dgt	±5%rdg±3dgt ±20%(100GΩ or more)	±2%rdg±3dgt
Short circuit current	1.5mA					—
Rated test current	0.7 to 0.9mA at 0.25MΩ load	0.8 to 1mA at 0.5MΩ load	1 to 1.2mA at 1MΩ load	1 to 1.2mA at 2.5MΩ load	1 to 1.2mA at 5MΩ load	—
Open circuit voltage	250V +10%,-10%	500V +20%,-10%	1000V +20%,-0%	2500V +20%,-0%	5000V +20%,-0%	—
Applicable standards	IEC 61010-1, IEC 61010-2-030 CAT IV 300V / CAT III 600V Pollution degree 2, IEC 61010-2-034, IEC 61326-1, 2-2					
Power source	12V DC:LR14 × 8					
Dimension	177(L) × 226(W) × 100(D) mm					
Weight	Approx. 1.7kg (including batteries)(3025B) / Approx. 1.9kg (including batteries)(3125B)					
Accessories	7165A(Line probe), 7264(Earth cord), 7265(Guard cord), 8019(Hook type prod), 9203(Carrying case [Hard] for 3025B) 9204(Carrying case [Hard] for 3125B), Batteries, Instruction manual					
Optional accessories	7168A(Line probe with alligator clip), 7253(Longer line probe with alligator clip), 8302(Adapter for recorder)					

*1 3125B only

Accessories



MODEL 7165A
Line probe
3,000mm



MODEL 7264
Earth cord
3,000mm



MODEL 7265
Guard cord
3,000mm



MODEL 8019
Hook type prod



MODEL 9203/9204
Carrying case [Hard]
9203(3025B)/9204(3125B)

Optional accessories



MODEL 7168A
Line probe with alligator clip
3,000mm

MODEL 7253
Longer line probe
with alligator clip
15m



MODEL 8302
Adapter for recorder
(Output 1mV/1μA)
Cable length:
200mm connector side
1,100mm alligator clip side



HIGH VOLTAGE INSULATION TESTERS

5000V

KEW **3127**

CAT IV 600V DC AC V USB MEMORY Bluetooth

- Insulation Resistance up to 10TΩ
- Short-Circuit Current up to 5mA
- Wide Test Voltage from 250 to 5000V
- Diagnostic Insulation Tests: IR, PI, DAR, DD, SV, RAMP
- Wireless communication by Bluetooth for transferring and showing real-time data to PC and Android device
- Memory and Logging functions
- Filter function reduces noise interference
- Robust design for field use with IP65 (lid closed)
- Rechargeable battery

Function

PI DAR DD SV RAMP



		3127				
Insulation resistance						
Test voltage		250V*1	500V	1000V	2500V	5000V
Max measurement value		9.99GΩ	99.9GΩ	199GΩ	999GΩ	9.99TΩ
Accuracy		0.0 to 99.9MΩ ±5%rdg±3dgt	0.0 to 999MΩ ±5%rdg±3dgt	0.0 to 1.99GΩ ±5%rdg±3dgt	0.0 to 99.9GΩ ±5%rdg±3dgt	0.0 to 99.9GΩ ±5%rdg±3dgt
		0.1 to 9.99GΩ ±20%rdg	1 to 99.9GΩ ±20%rdg	2 to 199GΩ ±20%rdg	100 to 999GΩ ±20%rdg	0.1 to 9.99TΩ ±20%rdg
Short circuit current		5.0mA max.				
Output voltage	Accuracy	-10 to +10%	-10 to +20%	0 to +20%		
	Variable	—			-20 to 0% (by 5%)	
	Monitor	±10%rdg±20V				
Measuring range		Voltage measurement		Current measurement		Capacitance measurement
		AC:30 to 600V (50/60Hz) DC:±30 to ±600V		0.00nA to 5.50mA		5.0nF to 50.0μF*2
Accuracy		±2%rdg±3dgt		±10%rdg*3		±5%rdg±5dgt
Power source		Rechargeable Battery (Lead-acid Battery) 12V*4 Charging power : 15VA DC max.				
Communication interface		USB, Bluetooth®5.0*5				
Applicable standards		IEC 61010-1, IEC 61010-2-030 CAT IV 600V Pollution degree2, IEC 61010-2-034, IEC 61326-1, 2-2				
Dimension		208(L) × 225(W) × 130(D) mm (Hard case 380(L) × 430(W) × 154(D) mm)				
Weight		3127:Approx. 4kg (including battery), Total:Approx. 8kg (including Accessories)				
Accessories		7165A(Line probe), 7224A(Earth cord), 7225A(Guard cord) 8019(Hook type prod), 8327EU(Power adapter 15V/1A), 9171(Carrying case[Hard]), Instruction manual				
Optional accessories		7168A(Line probe with alligator clip) 7253(Longer line probe with alligator clip), 8212-USB(USB adapter), 8302(Adapter for recorder 1mV/1μA)				

*1 IR mode only *2 At 5000V range 5.0nF-25.0μF *3 Determined by resistance and Voltage values (over 10MΩ) *4 No measurements are possible while charging

*5 Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

Data Communication Function

- Transferring and showing real-time data to PC and Android tablet
- Recorded data can be transferred (PC only)
- Analysis of the saved data (PC only)



System requirements
OS: Windows® 11/10
Display: XGA (Resolution 1024 × 768 dots) or more
Required HDD space: 1Gbyte or more
Others: USB port

*Please download the software from our website.

※Free Android software is available on download site

Optional accessories



7168A
(3m)



7253
(15m)



8212-USB



8302

Diagnostic Insulation Tests


RAMP RAMP TEST

Voltage used in Step voltage test is raised in steps but that used in Ramp measurement is gradually raised.

The KEW 3127 RAMP test generates a rising voltage ramp up to the selected voltage.

[Breakdown Mode]

KEW 3127 automatically stops the test if the insulation breaks down in order to prevent damage to the object being tested.




[Burn Mode]

KEW 3127 allows the insulation test voltage to continue even after the insulation breaks down. This enables you to locate a fault, such as pinholes in windings, by seeing a spark or a wisp of smoke.



SV SV Measurement (Step Voltage)

During the test, the applied voltage incrementally steps by a certain voltage taking successive 5-time measurement. Degradation of insulation may be doubted when insulation resistances become lower at higher applied voltages.



HIGH VOLTAGE INSULATION TESTERS

12000V

KEW 3128



CAT IV 600V DC AC V AUTO POWER OFF USB MEMORY External Power Supply

- Test Voltage 12kV (max.), Resistance 35TΩ (max.)
- Short-Circuit Current up to 5mA
- Graphic representation of the insulation resistance and leakage current versus time on large display with bar graph and backlight
- Print Screen Function enables to record up to 32 display screens
- Internal Memory can store about 43,000 data (max.)
- Can be operated from internal rechargeable battery or from AC line
- Robust design for field use with IP64 rating (with lid closed)

Function

PI DAR DD SV

		3128					
Insulation resistance	Test voltage	500V	1000V	2500V	5000V	10000V	12000V
	Max measurement value	500GΩ	1TΩ	2.5TΩ	5TΩ	35TΩ	
	Accuracy	400kΩ to 50GΩ ±5%rdg±3dgt	800kΩ to 100GΩ ±5%rdg±3dgt	2MΩ to 250GΩ ±5%rdg±3dgt	4MΩ to 500GΩ ±5%rdg±3dgt	8MΩ to 1TΩ ±5%rdg±3dgt	
		50.1 to 500GΩ ±20%rdg*1	101G to 1TΩ ±20%rdg	251G to 2.5TΩ ±20%rdg	501G to 5TΩ ±20%rdg	1.01 to 10TΩ ±20%rdg	10.1 to 35TΩ*2
	Short circuit current	5.0mA max.					
Output voltage	Load resistor to output rated voltage	0.5MΩ or more	1MΩ or more	2.5MΩ or more	5MΩ or more	20MΩ or more	24MΩ or more
	Rated voltage	500V	1000V	2500V	5000V	10000V	12000V
	Monitor accuracy	±10%±20V					
	Output accuracy	0 to +20%	0 to +10%	0 to +10%	0 to +10%	-5 to +5%	-5 to +5%
	Selectable range	50 to 600V (in steps of 5V)	610 to 1200V (in steps of 10V)	1225 to 3000V (in steps of 25V)	3050 to 6000V (in steps of 50V)	6100 to 10000V (in steps of 100V)	10100 to 12000V (in steps of 100V)
Voltage measurement	Measuring range	DCV : ±30 to ±600V, ACV : 30 to 600V(50/60Hz)					
	Accuracy	±2%rdg±3dgt					
Current measurement	Measuring range	5.0nA to 2.40mA(Depending on the insulation resistance)					
	Accuracy	±5%rdg±5dgt					
Capacitance measurement	Measuring range	5.0nF to 50.0μF					40.0nF to 1.00μF (Display range : 5.0nF to 60.0μF)
	Accuracy	±5%rdg±5dgt					
General	Applicable standards	IEC 61010-1 CAT IV 600V Pollution degree 2, IEC 61010-2-034, IEC 61326, IEC 60529(IP64): with the lid closed.					
	Power source	Rechargeable Lead storage battery (12V *Charging time : Approx. 8 hours) / AC Power supply (100 to 240V, 50/60Hz) ※Continuous measuring time: Approx. 4 hours a load of 100MΩ at the Insulation resistance 12000V Range.					
	Dimension	330(L) × 410(W) × 180(D)mm *Instrument and Hard case					
	Weight	Approx. 9kg (including battery) *Instrument and Hard case					
	Accessories	7170(Power cord[EU]) or 7240(Power cord[UK]), 7224A(Earth cord), 7225A(Guard cord), 7226A(Line probe), 7227A(Line probe with alligator clip) 8029(Extension prod), 8212-USB(USB adapter), Instruction manual					
	Optional accessories	7254(Longer line probe with alligator clip)					

*1 Accuracy is not guaranteed with setting of 250V or less. *2 Values are displayed, but accuracy isn't guaranteed

Diagnostic Insulation Tests

PI Polarization Index

PI= $\frac{\text{Insulation resistance value 10 min. after start}}{\text{Insulation resistance value 1 min. after start}}$

PI	4.0 or more	4.0 to 2.0	2.0 to 1.0	1.0 or less
Criteria	Best	Good	Warning	Bad

DAR Dielectric Absorption Ratio

DAR= $\frac{\text{Insulation resistance value 1 min. after start}}{\text{Insulation resistance value *15 sec. after start}}$

DAR	1.4 or more	1.25 to 1.0	1.0 or less
Criteria	Best	Good	Bad

*User-Selectable 15sec. or 30sec. interval

DD Dielectric Discharge

DD= $\frac{\text{Current value 1 min. after completing (mA)}}{\text{Voltage value when a measurement complete (V) × Capacitance (F)}}$


DD	2.0 or less	2.0 to 4.0	4.0 to 7.0	7.0 or more
Criteria	Good	Warning	Poor	Very poor

"KEW Windows" Software for report

The stored data can be transferred to PC via MODEL 8212-USB.

System requirements

OS: Windows® 11/10
Display: XGA (Resolution 1024 × 768 dots) or more
Required HDD space: 100Mbyte or more
Others: USB port, .NET Framework(2.0 or later)

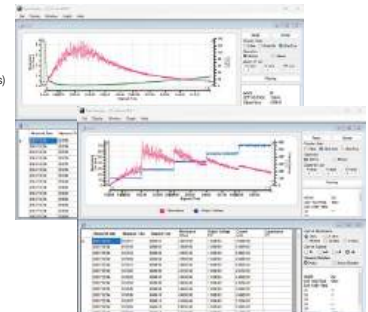

*Please download the software from our website.

Optional accessory

MODEL 7254

Longer line probe with alligator clip
15m




EARTH TESTERS



Measurement of the earth electrode resistance(3-Pole method)

[MODEL 4102A/KEW 4105A/KEW 4105DL/KEW 4105DLBT]


The international standard IEC 60364-6 provides information regarding the measurement of the resistance of an earth electrode for TT, TN and IT systems. This measurement shall be made by the Volt-Ampere-metric method using two auxiliary earth electrodes. The instrument that covers this requirement is the Earth Tester.

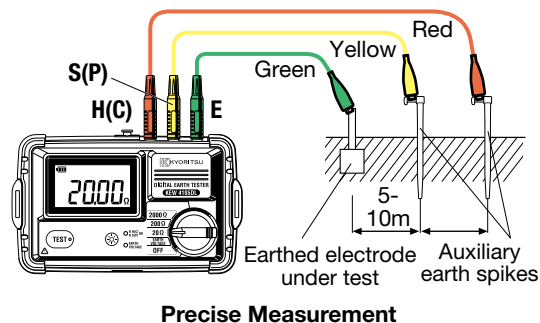


Precise Measurement

Measurement of the simplified earth resistance (2-Pole method)


[KEW 4300/MODEL 4102A/KEW 4105A/KEW 4105DL/KEW 4105DLBT]

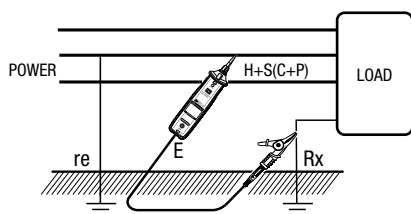

Measuring the earth resistance of load



Measuring the earth resistance of wall socket

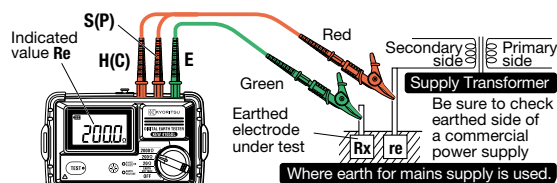


Simplified Measurement

Measurement of the earth resistance with Earth Clamp

[MODEL 4200/KEW 4202]


(Why earth measurements can be found by only clamping it?)

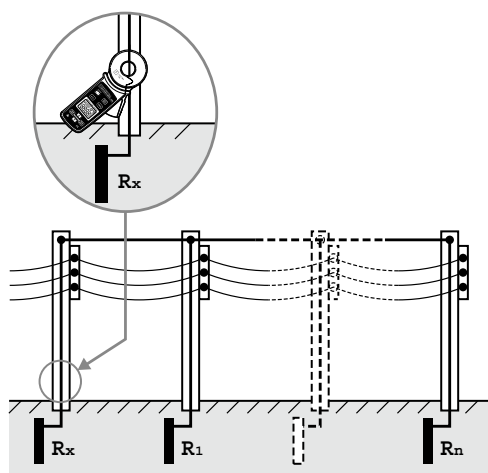

R_x is defined as earth resistance under test, and R₁, R₂...R_n are defined as earth resistance of other measuring objects.


These earth resistances, R₁, R₂,... R_n can be considered that they are connected in parallel. And They can be regarded as a combined resistance R_s. The R_s can be regarded small enough against R_x since a combined resistance consists of several resistances.

Following is an equivalent circuit diagram of this circuit.

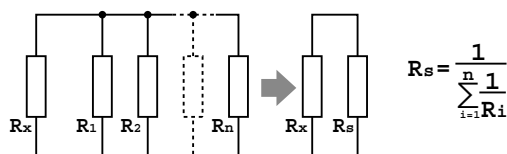

Voltage V is applied to the object (Resistance R_x) measured from the voltage injection transformer CT1, and the current I corresponding to the earth resistance is flowed.

The current I is detected with detection transformer CT2, and object (Resistance R_x) measured can be put out by the calculation. (refer to the right diagram)

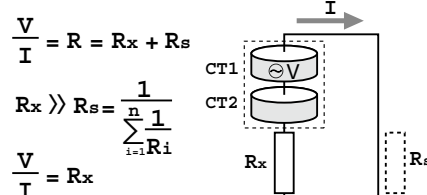

EARTH TESTERS

KEW 4105DL Cable reel set model
KEW 4105DL-H Hard case model



- 3-Pole and 2-Pole Earth Resistance measurement (0.01 to 2000Ω)
- Waterproof design (IP67)
- Rotary Switch makes the user interface very intuitive
- Large LCD Display with Backlight
- LED to monitor correct / non correct auxiliary earth spike resistance
- Earth Voltage Measurement (0 to 300V AC/DC)
- CAT IV 100V

Water and dust proof: after use you can wash it to remove the mud and dust!



IP67

	4105DL/4105DL-H		
Earth resistance measurement	20Ω	200Ω	2000Ω
Measuring range	0.00 to 20.00Ω	0.0 to 200.0Ω	0 to 2000Ω
Display range	0.00 to 20.99Ω	0.0 to 209.9Ω	0 to 2099Ω
Accuracy*1	±1.5%rdg±0.08Ω*2	±1.5%rdg±4dgt	
Auxiliary earth resistance*3	<10kΩ	<50kΩ	<100kΩ
Comparator reference value	10Ω	100Ω	500Ω
Earth voltage measurement			
Measuring range	0 to 300V AC (45 to 65Hz) / ±0 to ±300V DC		
Display range	0.0 to 314.9V AC / 0.0 to ±314.9V DC		
Accuracy	±1%rdg±4dgt		
Overload protection	Earth resistance : 360V AC(10 seconds) Earth Voltage : 360V AC(10 seconds)		
Applicable standards	IEC 61010-1 CAT IV 100V / CAT III 150V / CAT II 300V Pollution degree 3 IEC 61010-2-030, IEC 61010-031, IEC 61557-1, 5 IEC 60529(IP67), IEC 61326-1, 2-2		
Power source	LR6(AA)(1.5V) × 6		
Dimension	121(L) × 188(W) × 59(D) mm (including case lid)		
Weight	Approx. 690g (including batteries and case lid)		
Accessories for 4105DL	7127B(Simplified measurement probe) 8041(Auxiliary earth spikes[2spikes/1set]) 9121(Shoulder strap) 7267(Cable reel for Earth resistance tester (Red) 20m) 7268(Cable reel for Earth resistance tester (Yellow) 10m) 7271(Earth resistance test lead (Green) 5m) 9190(Carrying case) ,Batteries, Instruction manual		
Accessories for 4105DL-H	7127B(Simplified measurement probe) 8041(Auxiliary earth spikes[2spikes/1set]) 9121(Shoulder strap) 7266(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 9191(Carrying case[Hard]) ,Batteries, Instruction manual		
Optional accessories	7266(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set))*4 7267(Cable reel for Earth resistance tester (Red) 20m)*5 7268(Cable reel for Earth resistance tester (Yellow) 10m)*5 7271(Earth resistance test lead (Green) 5m)*5 9190(Carrying case)*5 9191(Carrying case[Hard])*4 9192(Carrying case for cord reels) 7272(Precision measurement cord set) 7269(Earth resistance test lead (Red 20m)) 7270(Earth resistance test lead (Yellow 10m)) 8259(Adapter for measurement terminal (Red, Yellow, Green/1set))		

*1 For precision measurement, auxiliary earth resistance should be 100 Ω ±5% or less.

*2 At simplified measurement add ±0.10 Ω to the specified accuracy.

*3 Accuracy within the auxiliary earth resistance: ±5% rdg ±10 dgt. *4 4105DL only *5 4105DL-H only

Innovative Cable reel with wire guide system to facilitate rewinding



Earth voltage warning


Red LED lights up if an external voltage is detected.



[LED light comes on if:]

Frequency	Voltage
0 to 10Hz	> 10V
10 to 100Hz	> 25V
100 to 400Hz	> 5V

Strong noise rejection!




Noise rejection up to 25V rms allows accurate testing in noisy environments.

Adapter to enable use of other test leads



Robust steel made earth spikes



Earth measurements are possible up to 100kΩ* of auxiliary earth pikes resistance.

Auxiliary earth resistance check

If the auxiliary earth resistance is:

Too high at S(P) terminal



Too high at H(C) terminal



Within allowable range (Green LED OK)



*20Ω range 10kΩ, 200Ω range 50kΩ, 2000Ω range 100kΩ.

EARTH TESTERS

KEW **4105DLBT**
KEW **4105DLBT-H**

Cable reel set model
Hard case model

NEW



WP
AUTOPOWER OFF
Bluetooth

CE ((KEW))
CONNECT

- 3-Pole and 2-Pole Earth Resistance measurement (0.01 to 2000Ω)
- Waterproof design (IP67)
- Built-in Bluetooth® enables data transfer
- Noise rejection up to 25V rms allows accurate testing in noisy environments
- Rotary Switch makes the user interface very intuitive
- Large LCD Display with Backlight
- LED to monitor correct / non correct auxiliary earth spike resistance
- Earth Voltage Measurement (0 to 300V AC/DC)
- CAT IV 100V

* Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®.
Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.



KEW Smart
Advanced

- Simplified monitoring
- Report creation

* Please see pp.8 to 9 for details.



	4105DLBT/4105DLBT-H		
Earth resistance measurement	20Ω	200Ω	2000Ω
Measuring range	0.00 to 20.00Ω	0.0 to 200.0Ω	0 to 2000Ω
Display range	0.00 to 20.99Ω	0.0 to 209.9Ω	0 to 2099Ω
Accuracy*1	±1.5%rdg±0.08Ω*2	±1.5%rdg±4dgt	
Auxiliary earth resistance*3	<10kΩ	<50kΩ	<100kΩ
Comparator reference value	10Ω	100Ω	500Ω
Earth voltage measurement			
Measuring range	0 to 300V AC (45 to 65Hz) / ±0 to ±300V DC		
Display range	0.0 to 314.9V AC / 0.0 to ±314.9V DC		
Accuracy	±1%rdg±4dgt		
Overload protection	Earth resistance : 360V AC(10 seconds) Earth Voltage : 360V AC(10 seconds)		
Applicable standards	IEC 61010-1 CAT IV 100V / CAT III 150V / CAT II 300V Pollution degree 3 IEC 61010-2-030, IEC 61010-031, IEC 61557-1, 5 IEC 60529(IP67), IEC 61326-1, 2-2		
Communication interface	Bluetooth®5.0		
Power source	LR6(AA)(1.5V) × 6		
Dimension	121(L) × 188(W) × 59(D) mm (including case lid)		
Weight	Approx. 690g (including batteries and case lid)		
Accessories for 4105DLBT	7127B(Simplified measurement probe) 8041(Auxiliary earth spikes[2spikes/1set]) 9121(Shoulder strap) 7267(Cable reel for Earth resistance tester (Red) 20m) 7268(Cable reel for Earth resistance tester (Yellow) 10m) 7271(Earth resistance test lead (Green) 5m) 9190(Carrying case) ,Batteries, Instruction manual		
Accessories for 4105DLBT-H	7127B(Simplified measurement probe) 8041(Auxiliary earth spikes[2spikes/1set]) 9121(Shoulder strap) 7266(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 9197(Carrying case[Hard]) ,Batteries, Instruction manual		
Optional accessories	7266(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set))*4 7267(Cable reel for Earth resistance tester (Red) 20m)*5 7268(Cable reel for Earth resistance tester (Yellow) 10m)*5 7271(Earth resistance test lead (Green) 5m)*5 9190(Carrying case)*5 9197(Carrying case[Hard])*4 9192(Carrying case for cord reels) 7272(Precision measurement cord set) 7269(Earth resistance test lead (Red) 20m)) 7270(Earth resistance test lead (Yellow) 10m)) 8259(Adapter for measurement terminal (Red, Yellow, Green/1set))		

*1 For precision measurement, auxiliary earth resistance should be 100 Ω ±5% or less.

*2 At simplified measurement add ±0.10 Ω to the specified accuracy.

*3 Accuracy within the auxiliary earth resistance: ±5% rdg ±10 dgt.

*4 4105DLBT only *5 4105DLBT-H only

Selection Guide

	4105DL	4105DL-H	4105DLBT	4105DLBT-H
Bluetooth® communication	—	—	✓	✓
Accessories(●), Optional accessories(△)				
① 7127B Simplified measurement probe	●	●	●	●
② 8041 Auxiliary earth spikes [2spikes/1set]	●	●	●	●
③ 9121 Shoulder strap	●	●	●	●
④ 7266 Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)	△	●	△	●
⑤ 7267 Cable reel for Earth resistance tester (Red) 20m	●	△*	●	△*
⑥ 7268 Cable reel for Earth resistance tester (Yellow) 10m	●	△*	●	△*
⑦ 7271 Earth resistance test lead (Green) 5m	●	△	●	△
⑧ 9190 Carrying case	●	△	●	△
⑨ 9191 Carrying case[Hard]	△	●	—	—
⑩ 9197 Carrying case[Hard]	—	—	△	●
⑪ 9192 Carrying case for cord reels	△	△	△	△
⑫ 7272 Precision measurement cord set (②8041, ⑤7267, ⑥7268, ⑦7271, ⑪9192)	△	△	△	△
⑬ 7269 Earth resistance test lead (Red) 20m	△	△	△	△
⑭ 7270 Earth resistance test lead (Yellow) 10m	△	△	△	△
⑮ 8259 Adapter for measurement terminal (Red, Yellow, Green/1set)	△	△	△	△

* The cord reel itself cannot be stored in the hard case.

Cable reel set model



Hard case model



EARTH TESTERS

MODEL 4102A Soft case model MODEL 4102A-H Hard case model



CE

	4102A/4102A-H		
Earth resistance measurement	× 1ΩRange	× 10Ω	× 100Ω
Measuring range	0 to 12Ω	0 to 120Ω	0 to 1200Ω
Accuracy	±3% of full scale		
Earth voltage measurement			
Measuring range	0 to 30V AC (50/60Hz)		
Accuracy	±3% of full scale		
Overload protection	Earth resistance : 276V AC/DC (10 seconds) Earth voltage : 276V AC/DC (10 seconds)		
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-030, IEC 61557-1, 5, IEC 60529(IP54)		
Power source	R6(AA)(1.5V) × 6		
Dimension	105(L) × 158(W) × 70(D) mm (including case lid)		
Weight	Approx. 600g (including batteries and case lid)		
Accessories	7095A(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 7127B(Simplified measurement probe) 8032(Auxiliary earth spikes[2spikes/1set]), 9121(shoulder strap) 9084(Carrying case for 4102A), 9164(Carrying case [Hard] for 4102A-H) Batteries, Instruction manual		
Optional accessories	7245A(Precision measurement cord set) 8259(Adapter for measurement terminal)		

KEW 4105A Soft case model KEW 4105A-H Hard case model



CE

4105A/4105A-H			
Earth resistance measurement	20Ω	200Ω	2000Ω
Measuring range	0.00 to 1999Ω		
Display range	0.00 to 19.99Ω	0.0 to 199.9Ω	0 to 1999Ω
Accuracy	±2%rdg±0.1Ω	±2%rdg±3dgt	
Earth voltage measurement			
Measuring range	0 to 200V AC (50/60Hz)		
Display range	0.0 to 199.9V		
Accuracy	±1%rdg±4dgt		
Overload protection	Earth resistance : 280V AC (10 seconds) Earth voltage : 300V AC (1 minute)		
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-030, IEC 61557-1, 5, IEC 60529(IP54)		
Power source	R6(AA)(1.5V) × 6		
Dimension	105(L) × 158(W) × 70(D) mm (including case lid)		
Weight	Approx. 550g (including batteries and case lid)		
Accessories	7095A(Earth resistance test leads (Red 20m, Yellow 10m, Green 5m/1set)) 7127B(Simplified measurement probe) 8032(Auxiliary earth spikes[2spikes/1set]), 9121(shoulder strap) 9084(Carrying case for 4105A), 9165(Carrying case [Hard] for 4105A-H) Batteries, Instruction manual		
Optional accessories	7245A(Precision measurement cord set) 8259(Adapter for measurement terminal)		

Features(4102A/4105A)

- 3-Pole and 2-Pole Earth Resistance
- The latest circuit design permits the instrument to operate with the minimum of influence from earth voltage and earth resistance of auxiliary earth spikes
- Dust and drip proof (designed to IEC 60529(IP54))
- Earth resistance value can be read directly from the scale
- Designed to meet IEC 61010-1 safety standard
- Capable of measuring earth voltage
- Small and lightweight. Shock resistant new case material
- 2mA measuring current permits earth resistance tests without tripping earth leakage current breakers in the circuit under test
- Lead wire connection to C and P terminals and proper auxiliary earth resistance can be checked by "OK" lamp
Lead wire connection to C and E terminals is good when "OK" lamp is illuminated (4102A only)

Optional accessories



Soft case model



Hard case model



MODEL 7245A
Precision measurement cord set
(7228A, 8032, 8200-03, 9142)

< MODEL 7245A Precision measurement cord set >



MODEL 7228A
Earth resistance test leads



MODEL 8032
Auxiliary earth spikes
[2spikes/1set]



MODEL 8200-03
Cord reels[3pcs]



MODEL 9142
Carrying case



MODEL 8259
Adapter for measurement terminal
[red, yellow, green/1set]

EARTH TESTERS



KEW 4106



CE


- Earth resistance measurement with six ranges covering measurements from 0.001 Ω to 200 k Ω
- Earth resistivity (ρ) measurement is automatically calculated after having set the distance between Auxiliary Earth Spikes (Wenner method)
- Automatic and Manual selection of the Test Current Frequency in four bands of 94/105/111/128Hz
In Automatic mode KEW 4106 will select the most suitable Frequency
- Advanced Filtering method (based on FFT Fast Fourier Transform) reduces noise interference for obtaining stable measurements
- Up to 800 measurement results can be saved in the memory and recalled on the display
- The stored results can be transferred to a PC by using USB adapter (MODEL 8212-USB) and the special software "KEW Report"
*Please download the software from our website.
- Robust design with IP54 protection

4106				
Function	Range	Resolution	Measuring range	Accuracy
Earth resistance Re (Rg at ρ measurement)	2 Ω	0.001 Ω	0.03 to 2.099 Ω	$\pm 2\% \text{rdg} \pm 0.03\Omega$
	20 Ω	0.01 Ω	0.03 to 20.99 Ω	$\pm 2\% \text{rdg} \pm 5 \text{dgt}$
	200 Ω	0.1 Ω	0.3 to 209.9 Ω	
	2000 Ω	1 Ω	3 to 2099 Ω	
	20k Ω	10 Ω	0.03 to 20.99k Ω	
Earth resistivity ρ	200k Ω	100 Ω	0.3 to 209.9k Ω	
				8% of Re+Rh+Rs
	2 Ω	0.1 to 1 Ω -m	0.2 to 395.6 Ω -m	$\rho = 2 \times \pi \times a \times Rg$
	20 Ω	Auto-ranging	0.2 to 3956 Ω -m	
	200 Ω		20 Ω to 39.56k Ω -m	
Series interference voltage Ust (A.C only)	2000 Ω		0.2 to 395.6k Ω -m	
	20k Ω		2.0 to 1999k Ω -m	
	200k Ω			
Frequency Fst	Auto-ranging	0.1Hz, 1Hz	40 to 499.9Hz	$\pm 1\% \pm 2 \text{dgt}$
Test Current	80mA max.			
Memory capacity	800 data			
Communication interface	USB			
LCD	Dot-matrix 192 \times 64, monochrome			
Over-range indication	"OL"			
Overload protection	between E-S(P) and between E-H(C) terminals 280V AC / 10 sec.			
Applicable standards	IEC 61010-1 CAT IV 150V / CAT III 300V Pollution degree 2 IEC 61557-1,5, IEC 61326-1(EMC), IEC 60529(IP54)			
Power source	12V DC : sizeAA manganese dry battery (R6) \times 8 (Auto power off: Approx. 5 minutes)			
Dimension	167(L) \times 185(W) \times 89(D)mm			
Weight	Approx. 900g (including batteries)			
Accessories	7229A(Earth resistance test leads) 7238A(Simplified measurement test leads) 8032(Auxiliary earth spikes[2spikes/1set]) \times 2 8200-04(Cord reels [4pcs]) 8212-USB(USB adapter) 8923(Fuse [0.5A/600V]) \times 1 (included), 1 (spare) 9121(Shoulder strap), 9125(Carrying case) Batteries, Instruction manual			



KEW 4300

SIMPLIFIED EARTH TESTER



CE

4300	
Earth resistance ranges	200.0/2000 Ω (Auto-ranging) $\pm 3\% \text{rdg} \pm 5 \text{dgt}$
Voltage ranges	5.0 to 300.0V AC(45 to 65Hz) $\pm 1\% \text{rdg} \pm 4 \text{dgt}$ ± 5.0 to 300.0V DC $\pm 1\% \text{rdg} \pm 8 \text{dgt}$
Applicable standards	IEC 61010-1 CAT III 300V pollution degree 2 IEC 61557-1,5 IEC 61326-1,2-2, IEC 60529(IP40)
Power source	LR6(AA)(1.5V) \times 2
Dimension	232(L) \times 51(W) \times 42(D)mm
Weight	Approx. 220g(including battery)
Accessories	7248(Test lead with Alligator clip and Flat test probe) 8072(CAT II Standard prod) 8253(CAT III Standard prod) 8017(Extension prod long) 9161(Carrying case) Batteries, Instruction manual

KEW 4300 is simplified earth resistance tester (based on 2-pole method) that can be used for various distribution lines and electrical appliances and it also can measure AC/DC voltage. (As for AC voltages, True RMS values can be obtained.)

- 200/2000 Ω (2 ranges) : Auto-ranging
- Warning buzzer triggered at 100 Ω or less
- LED lights up when a large earth voltage is detected
- Live circuit warning when 30V or higher voltage is detected (KEW 4300 detects voltage even when measuring resistances)
- LED light for illuminating measurement points (It turns on/off automatically in relation to the ambient brightness)
- Small test current (2mA max.) not tripping RCD

LOOP/PSC TESTERS



LOOP/PSC TESTERS

MODEL 4118A



CE

- Custom microprocessor controlled for highest accuracy and reliability
- 3 LEDs for checking correct wiring status
- 15mA LOOP measurement: LOOP impedance 2000Ω range measurement is carried out with low test current (15mA)
The current will not cause tripping out involved RCD even the one with the lowest nominal differential current (30mA)
- Direct reading of Prospective Short Circuit Current (PSC)
- Measure low loop resistances (resolution of 0.01Ω)
- Automatic lock-out if test resistor overheats
- Large custom digital display readout
- Visual indication of reversed phase and neutral wiring at socket
- Designed to IP54 Rating

	4118A
Loop impedance ranges	20/200/2000Ω
Loop impedance accuracy	±2%rdg±4dgt
AC test current	20Ω 25A 200Ω 2.3A 2000Ω 15mA
AC test period	20Ω (20ms) 200Ω (40ms) 2000Ω (280ms)
PSC ranges	200A(2.3A 40ms) 2000A(25A 20ms) 20kA(25A 20ms)
PSC ranges accuracy	Consider accuracy of loop impedance
Voltage	110 to 260V ±2%rdg±4dgt
Operating voltage	230V +10%, -15%(195 to 253V)50Hz
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61557-1,3, IEC 60529(IP54)
Dimension	167(L) × 186(W) × 89(D)mm
Weight	Approx. 750g
Accessories	Molded plug test lead*1 7121B(Distribution board test leads) 9147(Cord case) 9121(Shoulder strap) Instruction manual

*1 7123(AU): Australian plug 7124(UK): British plug(13A)
7125(EU): European SCHUKO plug 7126(SA): South african plug

Accessories



MODEL 7121B
Distribution board test leads



Molded plug test lead

- MODEL 7123** (AU) Australian plug
- MODEL 7124** (UK) British plug(13A)
- MODEL 7125** (EU) European SCHUKO plug
- MODEL 7126** (SA) South african plug

Loop Testing Methods

In the buildings mainly used for private residence where low voltage power is supplied from electric utilities the fundamental protection against electric shock hazards is provided by appropriately coordinating the function of an earthing circuit with automatic switches placed at the latter stage of indoor wiring circuits. This is intended to quickly cut off the supply to an earthing circuit where a fault occurs following touch voltage exceeding an acceptable limit. Proper protection against electric shock hazards is given when the TT wiring system satisfies the requirement as expressed by the following formula:

$$R_a \times I_a \leq 50$$

where R_a is the sum of the resistances of earth bars and protective conductors and I_a is the maximum current of a protection system provided for installations, indicating that the value obtained by multiplying R_a with I_a is not more than 50V. This means a maximum voltage one can touch shall not exceed 50V in the event of an earth fault.

- Method of earth fault loop impedance testing at socket outlet. As shown in Fig., total earth fault loop impedance can be measured by plugging a loop tester into socket. The value of earth fault loop impedance measured represents the sum of transformer coil winding resistance, phase conductor (L3) resistance and protective conductor (PE) resistance as well as source earth resistance and installation earth resistance. With the loop tester set to any one of the PSC (prospective short circuit current) range, it is also possible to measure earth fault current.

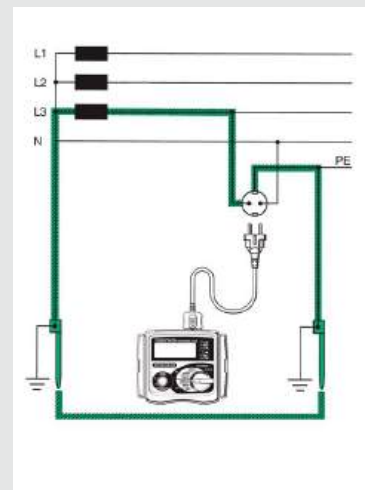


Fig. Earth fault loop impedance testing at socket outlet.

LOOP/PSC TESTERS

KEW **4140**



- Anti-Trip Technology for complete trip free Loop testing on all RCDs rated 30mA and above
- Dual Display allows simultaneous measurements like Loop & PFC/PSC
- Two wire connection for Loop L-L, L-N and PSC testing is possible
- Phase rotation, Voltage and Frequency measurements
- Lock-down test button for 'hands free' testing with auto-start operation
- Display and front panel keyboards with Backlight to be visible in dark places
- Water and Dust proof (IP54)

		4140	
Loop Impedance			
Function	L-PE ATT OFF	L-PE ATT ON	L-N/L-L
Rated voltage	230V (50/60Hz)		L-N: 230V (50/60Hz) L-L: 400V (50/60Hz)
Operating voltage	100 to 280V (45 to 65Hz)		100 to 500V (45 to 65Hz)
Range (Auto-ranging)	20/200/2000Ω	20/200/2000Ω (L-N<20Ω)	20Ω
Nominal Test Current at 0Ω External Loop: Magnitude/Duration at 230V	20Ω:6A/20ms 2000Ω:2.3A/20ms 2000Ω:15mA/250ms	L-N:6A/60ms N-PE:10mA/Approx. 5s	20Ω:6A/20ms
Accuracy	±3%rdg±4dgt*1	±3%rdg±6dgt*1	L-N: ±3%rdg±4dgt L-L: ±3%rdg±8dgt
PFC(L-PE)/PSC(L-N/L-L)*2			
Function	PSC/PFC	PSC/PFC (ATT)	PSC
Rated voltage	230V (50/60Hz)		L-N: 230V (50/60Hz) L-L: 400V (50/60Hz)
Operating voltage	100 to 280V(45 to 65Hz)		100 to 500V(45 to 65Hz)
Range (Auto-ranging)	2000A/20kA	2000A/20kA(L-N<20Ω)	2000A/20kA
Nominal Test Current at 0Ω External Loop: Magnitude/Duration at 230V	20Ω:6A/40ms 2000Ω:2A/20ms 2000Ω:15mA/500ms	L-N:6A/60ms N-PE:10mA/Approx. 5s	20Ω: 6A/20ms
Phase Rotation			
Operating Voltage	50 to 500V, 45 to 65Hz		
Remarks	Correct phase sequence : displayed “1.2.3” and mark Reversed phase sequence : displayed “3.2.1” and mark		
Volts			
Function	Volts	Frequency	
Measuring range	0 to 500V	45 to 65Hz	
Accuracy	±2%rdg±4dgt	±0.5%rdg±2dgt	
Applicable standards	IEC 61010-1 CAT III 300V (500V L to L) IEC 61557-1,3,7,10, IEC 60529 (IP54), IEC 61326(EMC)		
Power source	LR6/R6(AA)(1.5V) × 6 *Use of alkaline batteries (LR6) is recommended.		
Dimension	84(L) × 184(W) × 133(D)mm		
Weight	Approx. 860g (including batteries)		
Accessories	Mains test lead*3, Distribution board test lead*4, 9156A (Soft case with shoulder strap) Batteries, Instruction manual		

*1 Accuracy of L-N LOOP displayed on the Sub Display is synchronized with the one at L-N/L-L function.

*2 PSC/PFC Accuracy is derived from measured loop impedance specification and measured voltage specification.

*3 7187A:(UK)British plug, 7218A:(EU)European SCHUKO plug, 7221A:(SA)South african plug, 7222A: (AU)Australian plug

*4 7246 : Blue, Green, Red, 7247 : Black, Green, Red

Accessories



Mains test lead

MODEL **7187A** (UK)British plug

MODEL **7218A** (EU)European SCHUKO plug

MODEL **7221A** (SA)South african plug

MODEL **7222A** (AU)Australian plug



Distribution board test lead

MODEL **7246** Blue, Green, Red

MODEL **7247** Black, Green, Red



MODEL **9156A**

Soft case with shoulder strap

RCD TESTERS

MODEL 5406A




- Custom microprocessor controlled for highest accuracy and reliability
- 3 LEDs for checking correct wiring status
- 0 and 180 degree phase angle switch permits quick tests and consistent readings
- Digital read-out of tripping time
- Test of a large kind of RCDs : Standard, Selective, AC and A(DC sensitive breakers)
- Constant current source circuitry ensures that a fluctuating mains voltage does not affect the accuracy of readings
- Large custom digital display readout
- Visual indication of reversed phase and neutral wiring at socket
- Designed to IP54 Rating
- Complies with IEC 61557

	5406A
Rated tripping current	10/20/30/200/300/500mA
Fault condition settings	× 1/2 × 1 × 5 × DC Auto Ramp
Trip current duration	1000ms 200ms(× 5)
Lowest resolution	1ms
Trip time accuracy	±0.6%rdg±4dgt
Operating voltage	230V+10 to 15% (195 to 253V)[50Hz]
Applicable standards	IEC 61557-1,6 IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-031 IEC 60529(IP54)
Dimension	167(L) × 186(W) × 89(D)mm
Weight	Approx. 800g
Accessories	Molded plug test lead*1, 9147(Cord case) 9121(Shoulder strap), Instruction manual
Optional accessories	7121B(Distribution board test leads)

*1 7123(AU) : Australian plug 7124(UK) : British plug(13A)
7125(EU) : European SCHUKO plug 7126(SA) : South african plug

Accessories

Molded plug test lead



Optional accessory



KEW 5410



- **Measurement of RCD trip time**
Conducting testing of rated residual non-operating currents at × 1/2 Range, measuring RCD trip time at × 1 and × 5 Ranges
- **Measurement of trip out current**
Measuring trip out current by varying current automatically
- **Remote Test**
Enabling a user to hold the Test Leads with his both hands by locking the Test Button
Measurement will automatically start when the main voltage is detected
- **Voltage Measurement**
Carrying out a constant measurement of voltage in the stand-by mode at each Range
- **Auto-detection of Contact voltage**
Detecting the voltage to earth of Earth electrodes or Protective conductors during RCD test - when applying test currents - at measurement using EARTH in order to prevent electrical shocks caused by the damaged earth
Measurement will be ceased at AC50V or more
- **Dust and Water proof**
Dust and Water proof construction (designed to IEC 60529 (IP54))
- **Backlight**
Facilitating working at dimly illuminated locations

	5410			
Measurement of RCD trip time	Measurement of trip out current			
Range	× 5	× 1	× 1/2	Auto Ramp (mA)
Rated voltage	100V±10%, 200V±32%/-10%, 400V±10%, (50/60Hz)			
Test current	15/30/50/100mA	15/30/50/100/200/500mA		
Measuring range	Testing time 200ms	Testing time 2000ms		40 to 110% of IΔn (goes up by 5%) Testing time 300ms × 15 steps
Accuracy	Trip time ±1%rdg±3dgt	Test current ±2 to +8%dgt	-8 to -2%dgt	Test current at each step -4 to +4%
Voltage measurement				
Measuring range	80 to 450V(50/60Hz)			
Accuracy	±2%rdg±4dgt			
Applicable standards	IEC 61010-1 CAT III 300V / CAT II 400V Pollution degree 2 IEC 61557-1,6 IEC 60529(IP54)			
Operating temperature and humidity range	0 to 40°C, relative humidity 85%(no condensation)			
Storage temperature and humidity range	-20 to 60°C, relative humidity 75%(no condensation)			
Power source	R6(AA)(1.5V) × 8			
Dimension	167(L) × 186(W) × 89(D)mm			
Weight	Approx. 965g (including batteries)			
Accessories	7128A(Test leads), 7129A(Test lead with alligator clip) 8017(Extension prod long) × 2, 9147(Cord case), 9121(Shoulder strap), Batteries, Instruction manual			

*Only the RCD type G (without trip out time-delay) can be tested at Auto Ramp Test ; type S (time-delay) cannot be tested.

Accessories



PORTABLE APPLIANCE TESTER



PORTABLE APPLIANCE TESTER

KEW 6205

RMS BATTERY MEMORY USB AUTO POWER OFF



- Battery operated
- PASS/FAIL result
- Color status backlight
- 10mA & 30mA RCD test (Isolation transformer built in)
- Memory function up to 999 data
- Printer output
- Special analysis software "KEW Report" is available
*Please download the software from our website.
- *KEW 6205 equipped with Wireless LAN: available only in Australia and New Zealand.


CE

KEW 6205 is a hand-held portable appliance tester and can test electrical safety of Class I and Class II appliances. The Tester performs test and indicates PASS/FAIL result complying with the criteria of judgment defined in the AS/NZS 3760:2010 for In-service safety inspection and testing of electrical equipment.

Test Function

Function	Tests of contents
Class I Test	<ul style="list-style-type: none"> • Protective conductor resistance (Test current 200mA DC nominal) • Insulation resistance test (250 or 500V) • Leakage current test (100 to 253V/50Hz) • Load current test (100 to 253V/50Hz)
Class II Test	<ul style="list-style-type: none"> • Insulation resistance test (250 or 500V) • Leakage current test (100 to 253V/50Hz) • Load current test (100 to 253V/50Hz)
Extension Lead Test	<ul style="list-style-type: none"> • Protective conductor resistance (Test current 200mA DC nominal) • Insulation resistance test (between Line/Neutral-Earth short, Line/Neutral) • Leakage current test (100 to 253V/50Hz) • Polarity test
RCD Test	<ul style="list-style-type: none"> • RCD test (10/30mA)

Accessories

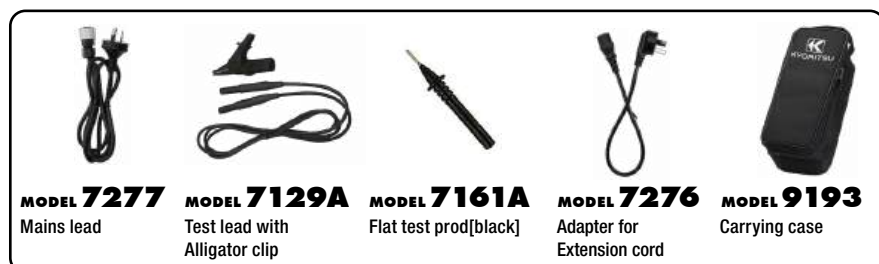

MODEL 7277
Mains lead

MODEL 7129A
Test lead with Alligator clip

MODEL 7161A
Flat test prod[black]

MODEL 7276
Adapter for Extension cord

MODEL 9193
Carrying case

	6205
Mains voltage indication	
Display range	30 to 270V
Accuracy	±5V
Protective conductor resistance test	
Measuring range	0.00 to 20.00Ω
Open circuit voltage	5±0.4V DC
Measuring current	200mA DC(nominal value)
Accuracy	±3%rdg±5dgt
Insulation resistance test	
Rated voltage	250V 500V
Measuring range	0.00 to 20.00MΩ
No-load voltage	250V DC +20%,-0% 500V DC +20%,-0%
Short circuit current	1.5mA DC or less
Accuracy	±2%rdg±3dgt
Load current/Leakage current test	
Item	Load current Leakage current
Mains voltage range	100 to 253V/50Hz
Measuring range	0.10 to 10.00A rms 0.10 to 20.00mA rms
Accuracy	±10%rdg±5dgt ±3%rdg±5dgt
RCD test	
Rated voltage	230V -15 to 10%/50Hz
Rated current	10/30mA
Function	× 1 × 5
Test duration	0.0 to 500.0ms 0.0 to 40.0ms
Operating time accuracy	±2ms(≤40ms), ±8ms(>40ms)
Power source	LR6(AA)(1.5V) × 6
Applicable standards	IEC 61010-1 CAT II 300V, IEC 61010-2-030, IEC 61010-2-034 IEC 61010-031, EN 61326-2-2, AS/NZS3760
Dimension	261(L) × 104(W) × 57(D)mm
Weight	Approx. 940g(including batteries)
Accessories	7277(Mains lead), 7129A(Test lead with Alligator clip) 7161A(Flat test prod[black]), 7276(Adapter for Extension cord) 9193(Carrying case), 8928(Fuse[10A/250V]) 9121(Shoulder strap), Buckle, Batteries Instruction manual
Optional accessories	7219(USB cable) 7275(Printer cable:Mini Din 6pin - D-sub 9pin) 7248(Test lead with Alligator clip and Flat test probe)

Color status backlight

PASS / FAIL result complying with AS/NZS 3760



PASS



FAIL

Optional accessories



MODEL 7219
USB cable

Recommended Printer
PC-42t Plus(Honeywell)

MODEL 7275
Printer cable

MODEL 7248
Test lead with Alligator clip and Flat test probe

MULTI FUNCTION INSTALLATION TESTERS



MULTI FUNCTION INSTALLATION TESTERS

KEW 6010B



CE

- Designed to IEC 61010-1, IEC 61557
- Data Memory : 300 measured results
- Download results to PC by MODEL 8212-USB (USB adapter)

5 in 1

Continuity

20/200Ω

Loop

20/2000Ω

Uc

100V

Insulation

500/1000V

RCD

10/30/100/300/500mA

Accessories



MODEL 7122B
Test leads



KAMP10
Test lead with IEC connector

Optional accessories



MODEL 7133B
Distribution board test leads



MODEL 8212-USB
USB adapter

Specification

	MODEL 8212-USB
Communication method	USB
Driver type	Virtual COM port
Communication speed	19200bps max.
Dimension	Adapter : 53(L) × 36(W) × 19(D)mm Cable : Approx. 2m
Operating temperature and humidity range	-10 to 50°C, 85% RH or less (no condensation)
Storage temperature and humidity range	-20 to 60°C, 85% RH or less (no condensation)

	6010B	
Continuity testing		
Measuring range	20/200Ω (Auto-ranging)	
Open circuit voltage	>6V	
Short circuit current	>200mA	
Accuracy	±3%rdg±3dgt	
Insulation testing		
Measuring range	20/200MΩ(Auto-ranging)	
Test voltage	500/1000V	
Open circuit voltage	+20%, -0%	
Rated current	>1mA	
Accuracy	±3%rdg±3dgt	
LOOP Impedance testing		
Impedance range	20/2000Ω	
Rated voltage	230V +10%, -15% [50Hz]	
Normal test current	20Ω: 25A/10ms	
	2000Ω: 15mA/350ms max.	
Accuracy	±3%rdg±8dgt	
RCD testing		
Test current (Test current duration)	× 1/2, × 1	10, 30, 100, 300, 500mA (2000ms)
	FAST	150mA(50ms)
	DC	10,30,100,300mA (2000ms), 500mA(200ms)
	Auto ramp	Goes up by 10% from 20% to 110% of IΔn. 300ms × 10
Rated voltage	230V+10%, -15% [50Hz]	
Accuracy	Test current	×1/2 : -8 to -2% ×1, Fast : 2 to 8%
		DC : ±10% Auto ramp: ±4%
	Trip time	±1%rdg±3dgt
Uc testing		
Measuring range	100V	
Rated voltage	230V +10%, -15% [50Hz]	
Test current	5mA at IΔn=10mA 15mA at IΔn=30/100mA 150mA at IΔn=300/500mA	
Accuracy	+5% to +15%rdg±8dgt	
General		
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree 2 IEC 61010-2-034, IEC 61557-1,2,3,4,6,10, IEC 60529(IP40)	
Power source	R6/LR6 × 8	
Dimension	115(L) × 175(W) × 86(D) mm	
Weight	Approx. 840g (including batteries)	
Accessories	7122B (Test leads), KAMP10 (Test lead with IEC connector)* 8923 (Fuse[0.5A/600V] × 1 (included), 1 (spare) 9092 (Cord case), 9121 (Shoulder strap), Shoulder pad Batteries, Instruction manual	
Optional accessories	7133B (Distribution board test leads) 8212-USB (USB adapter)	

*1 KAMP10(EU):European SCHUKO plug KAMP10(UK):British plug(13A)
KAMP10 (AU):Australian plug KAMP10(SA):South african plug

"KEW Report" Software for report

"KEW Report" transfers measurement data from the KEW 6010B to a PC via MODEL 8212-USB



System requirements

OS: Windows® 11/10
Display: XGA (Resolution 1024 × 768 dots) or more
Required HDD space: 20Mbyte or more
Others: USB port

*Please download the software from our website.

MULTI FUNCTION INSTALLATION TESTERS

MODEL 6011A



CE

MODEL 6011A can perform FIVE separate test functions: insulation, continuity, earth loop impedance, prospective short circuit current and RCD trip testing in full compliance with IEC 61557

5 in 1

Continuity

20/200/2000Ω

Loop

20/200/2000Ω

PSC

200/2000A/20kA

Insulation

250/500/1000V


RCD

10/30/100/300/500/1000mA

	6011A
Continuity testing	
Measuring ranges	20/200/2000Ω(Auto-ranging)
Open circuit voltage	>6V
Short circuit current	>200mA DC
Accuracy	±1.5%rdg±3dgt
Insulation testing	
Measuring ranges	20/200MΩ(Auto-ranging)
Test voltage	250/500/1000V DC
Output voltage on open circuit	250V+40%, -0% 500V+30%, -0% 1000V+20%, -0%
Rated current	> 1mA
Accuracy	±1.5%rdg±3dgt
Loop impedance testing	
Rated voltage	230V AC +10%, -15%[50Hz]
Voltage measuring range	100 to 250V AC[50Hz]
Impedance ranges	20/200/2000Ω
Nominal test current	25A(20Ω range) 15mA(200Ω range) 15mA(2000Ω range)
Accuracy	20Ω range ±3%rdg±4dgt 200Ω range ±3%rdg±8dgt 2000Ω range ±3%rdg±4dgt
PSC testing	
Rated voltage	230V AC +10%, -15%[50Hz]
PSC ranges	200A(15mA Test current) 2000A(25A Test current) 20kA(25A Test current)
Accuracy	PSC accuracy derived from measured loop impedance specification and measured voltage specification
RCD testing	
Rated voltage	230V AC +10%, -15%[50Hz]
Trip current settings	RCD × 1/2 :10,30,100,300,500,1000mA RCD × 1 : 10,30,100,300,500,1000mA RCD × 5 : 10,30,100,300mA (on × 5 range max current 1A)
Trip current duration	RCD × 1/2 × 1 : 2000ms RCD fast : 50ms
Accuracy	Trip current +10% -0% of test current at 230V Trip time ±1%rdg±3dgt
General	
Applicable standards	IEC 61010-1 CAT III 300V pollution degree 2 IEC 61010-2-034, IEC 61557, IEC 60529(IP54)
Power source	R6/LR6 × 8
Dimension	130(L) × 183(W) × 100(D)mm
Weight	Approx. 1100g (including batteries)
Accessories	KAMP10(Test lead with IEC connector)*1 7122B(Test leads), 7132A(KSLP5)(External earth probe) 8923 (Fuse[0.5A/600V]) × 1 (included), 1 (spare) 9092(Cord case), 9121(Shoulder strap) Batteries, Instruction manual
Optional accessories	7133B(Distribution board test leads)

*1 KAMP10(EU): European SCHUKO plug KAMP10(UK):British plug(13A)
KAMP10(AU):Australian plug KAMP10(SA):South african plug

Accessories

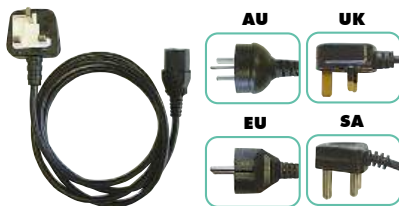

KAMP10

Test lead with IEC connector

MODEL 7122B

Test leads



MODEL 7132A (KSLP5)

External earth probe



MODEL 9092

Cord case



MODEL 9121

Shoulder strap

Optional accessory



MODEL 7133B

Distribution board test leads

PV INSULATION EARTH TESTER

KEW **6024PV**



- Accurate measuring of Insulation resistance even if the PhotoVoltaic (PV) arrays are generating power
- No need to short circuit the PV arrays or test at night to measure the Insulation resistance
- Earth resistance measurements with Voltamperometric method at 3 and 2 pole
- Waterproof design, ideally suited to work in bad weather condition
- Memory function up to 1000 data
- Luminescence button and large Backlight display
- Elapsed time, after starting a measurement, is displayed with the measured values
- Compact and light weight
- Test probe with a remote control switch is supplied as standard accessory
- Auto-discharge with voltage display
- Special analysis software "KEW Report" is available



4 in 1

PV Insulation
500/1000V

Insulation
250/500/1000V

Earth
20/200/2000Ω

Volts
600V AC/1000V DC

■ Indication of test duration facilitates insulation integrity check with one-minute readings.



■ Can measure under the bad weather condition.



IP54

6024PV						
Insulation resistance		PV Insulation*			Insulation	
Test voltage	500V	1000V		250V	500V	1000V
Range(Auto-ranging)	20.00/200.0/2000MΩ			20.00/200.0/2000MΩ		
Measuring range	0.00 to 1.50MΩ 200.1 to 2000MΩ	1.51 to 200.0MΩ	0.00 to 1.50MΩ 1001 to 2000MΩ	1.51 to 1000MΩ	—	
Accuracy	±5%rdg±6dgt	±1.5%rdg±5dgt	±5%rdg±6dgt	±1.5%rdg±5dgt		
Rated current	—			1.0 to 1.2mA		
				0.25MΩ	0.5MΩ	1MΩ
First effective measuring range				1.51 to 100.0MΩ	1.51 to 200.0MΩ	1.51 to 1000MΩ
Mid-scale value	—			50MΩ		
Accuracy				±1.5%rdg±5dgt		
Second effective measuring range				1.20 to 1.50MΩ	1.20 to 1.50MΩ	1.20 to 1.50MΩ
	—			100.1 to 2000MΩ	200.1 to 2000MΩ	1001 to 2000MΩ
Accuracy				±5.0%rdg±6dgt		
Open circuit voltage	1 to 1.2times					
Short circuit current	1.5mA or less					
Earth resistance						
Measuring range(Auto-ranging)	20.00/200.0/2000Ω					
Accuracy	±3.0%rdg±0.1Ω (20Ω range) ±3.0%rdg±3dgt (200/2000Ω range)					
Voltage measurement						
Measuring range	5 to 600V AC(45 to 65Hz) / ±5 to 1000V DC					
Accuracy	±1.0%rdg±4dgt					
General						
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2 IEC 61010-2-030, IEC 61010-2-034, IEC 61010-031, IEC 60529(IP54), IEC 61557-1,2,5,10, IEC 61326-1,2-2					
Power source	LR6(AA)(1.5V) × 6					
Dimension	84(L) × 184(W) × 133(D)mm					
Weight	Approx. 900g (including batteries)					
Accessories	7196B(Test leads with remote control switch), 7244A(Test lead with alligator clip), 8017(Extension prod long), 8072(CAT II Standard prod) 8212-USB(USB adapter), 9156A(Soft case with shoulder strap), Batteries, Instruction manual					
Optional accessories	7243A(L-shaped probe), 7245A(Precision measurement cord set), 8016(Hook type prod)					


*6024PV supports PV systems up to 1000V.

PV INSULATION EARTH TESTER


Accurate measurement while PV arrays generating power

With conventional insulation testers:

The PV arrays need to be short-circuited. A breaker is required and risk of arc hazard exists.

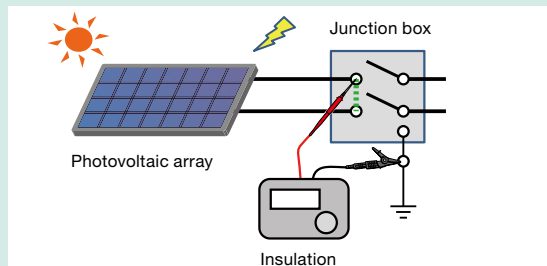


If the PV arrays are not short-circuited, low-risk, but not accurate.

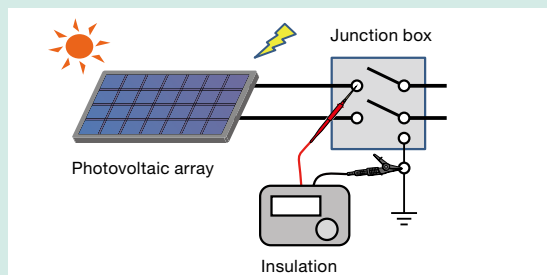


KEW 6024PV makes safe & accurate insulation resistance measurement possible!

- Increase your efficiency at work: no need waiting for the dark or compromising the accuracy of measurement.
- Safe: no need to short circuit the PV arrays.

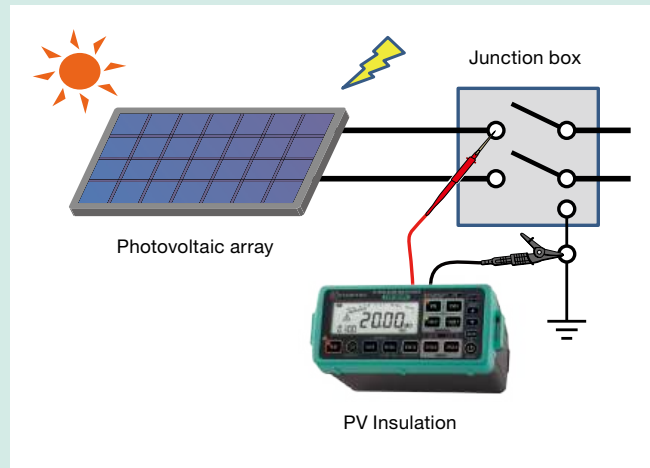


Accurate and quick measurement, unaffected by large static capacitance to earth.

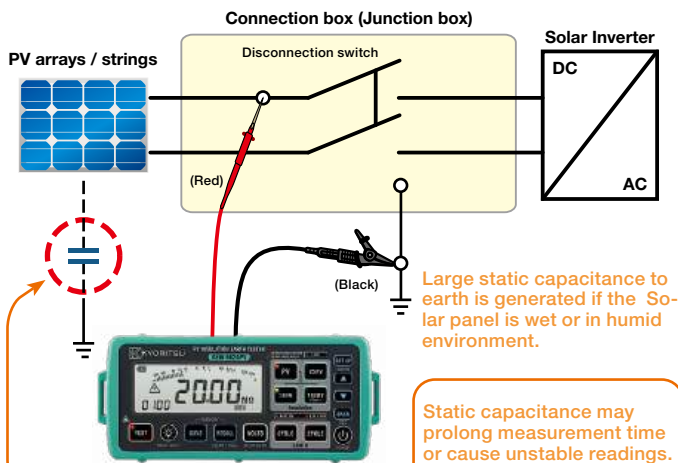

Analyzing and processing the recorded data with a PC.

[Site no.1]
E.g.: Number of the measured connection boxes

[Data no.]
Number of saved data



[Site no.2]
E.g.: Number of the measured strings


"KEW Report" Software for report
"KEW Report" transfers measurement data from the KEW 6024PV to a PC via MODEL 8212-USB.

System requirements


OS: Windows® 11/10
Display: XGA(Resolution 1024 × 768 dots) or more
Required HDD space: 1Gbyte or more
Others: USB port

*Please download the software from our website.

Accessories

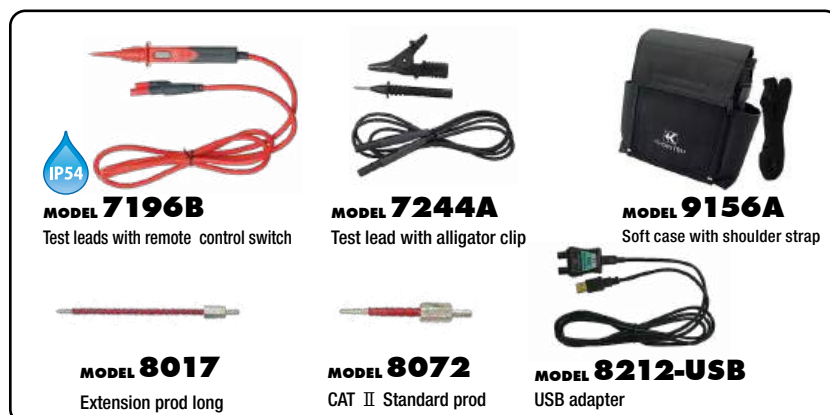

Optional accessories

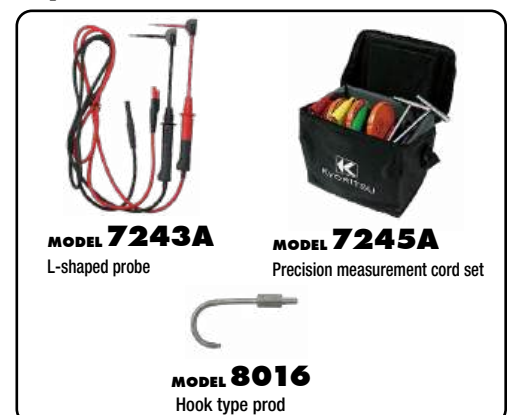

MULTI FUNCTION INSTALLATION TESTERS



KEW **6514BT** **NEW**

TRUE RMS MEMORY USB Bluetooth AUTO POWER OFF

13 in 1

Insulation

25/50/100/125/
250/500/1000V

Earth

20/200/2000Ω

Continuity

20/200/2000Ω

AC V

300/600V

2-Wire Loop

200/2000Ω

RCD

15/30/50/100/200/500mA

Frequency

Tests dedicated for EVSE

Phase rotation

SPD(Varistor)

Waveform check
of CP signal

Programmable
Auto test

Motor rotation

Latch Locking



Offers various tests for electrical installation

Loop 2-Wire

KEW 6514BT has an advanced measurement method called "Loop 2-Wire". It can carry out Loop impedance test by using 2 wires only, while using 3 wires is usually required. Its small test current of 7mA does not trip even the 15mA RCDs!

Motor rotation check

Without power supply, the motor connection can be checked by electromotive force generated by spinning the three-phase motor axis (shaft) by hand or other means.

Safety lock function for insulation resistance range

This safety function prevents the unintentional voltage presence for insulation resistance range. This safety function can be set on each range by our special application.

Auto memory

Activating this function, KEW 6514BT automatic saves measured data at every test. Up to 1000 measured data can be saved in the internal memory.

Dedicated function for EVSE *Offers advanced diagnostic analysis when used with optional EVSE ADAPTER

CP signal analysis function

Connecting KEW 6514BT to the CP terminal of the EVSE adapter, CP signal can be deeply analysed as using an oscilloscope. Also CP STATE and charge current are automatically calculated and shown on the instrument display.

Resistance measurement of latch switch circuit

Using KEW 6514BT in combination with EVSE ADAPTER KEW 8601, you can measure the circuit resistance and check if the latch switch of EVSE with type1 connector operates properly, with PASS or FAIL results.

Programmable Auto test

There is an EVSE dedicated function where you can carry out various tests. Combination and sequence of tests can be customized by using our special app. The instrument supports you showing how to make the connections on its screen prior to test and also gives a step-by-step guide to carry out all the necessary tests.

Communication interface

USB



KEW Report2

*Please download the software from our website.

Bluetooth®



KEW Smart
Advanced

Please search "KEW Smart"

Communication charge may be incurred separately to download application.

MULTI FUNCTION INSTALLATION TESTERS

6514BT

Insulation resistance										SPD(Varistor)
Test voltage		25V	50V	100V	125V	250V	500V	1000V	1000V max.	
Range		2.000/20.00MΩ (Auto-ranging)			2.000/20.00/200.0MΩ (Auto-ranging)		2.000/20.00/200.0/1000MΩ (Auto-ranging)	2.000/20.00/200.0/2000MΩ (Auto-ranging)	0 to 1000V (goes up by 1V)	
Accuracy		—								±5%rdg±5dgt
First effective measurement range		0.100 to 10.00MΩ ±2%rdg±2dgt		0.100 to 25.0MΩ		0.100 to 50.0MΩ	0.100 to 100.0MΩ	0.100 to 1000MΩ	—	
Second effective measurement range		0.050 to 0.099MΩ ±2%rdg±4dgt								—
		10.01 to 18.00MΩ ±5%rdg		25.1 to 180.0MΩ		50.1 to 180.0MΩ	100.1 to 900MΩ	1001 to 1800MΩ	—	
Rated current		1.0 to 1.2mA @0.025MΩ(25V) @0.05MΩ(50V)		1.0 to 1.2mA @0.1MΩ(100V) @0.125MΩ(125V)		1.0 to 1.2mA @0.25MΩ	1.0 to 1.2mA @0.5MΩ	1.0 to 1.2mA @1MΩ	—	
Short circuit current		1.5mA max.								—
RCD						EVSE Function				
Rated voltage		85 to 440V(50/60Hz)					Measuring range	Vtop	2.0 to 15.0V	
Function		x1/2, x1, Ramp 15/30/50/100/200/500mA					Accuracy	Vbase	-15.0 to -2.0V	
								Frequency	980 to 1020Hz	
								Duty	10.0 to 96.0%	
RCD type		AC(G)		Charging current	6.0 to 80.0A					
Accuracy	Trip current	x1/2	-8 to -2%				Vtop	±4dgt		
		x1	+2 to +8%				Vbase			
		Ramp	-4 to +4%				Frequency	±0.5%rdg±4dgt		
	Trip time	x1/2	±1%rdg±2ms				Duty	±10dgt		
x1					Charging current	Depends on the accuracy of the Duty cycle				
Continuity						Loop impedance(L-PE(2wire))				
Range		20.00/200.0/2000Ω (Auto-ranging)				Rated voltage		85 to 260V(50/60Hz)		
Open circuit voltage (DC)		7 to 14V				Impedance range		200.0/2000Ω		
Measurement current		200mA or more(2Ω or less)				Accuracy		±3%rdg±10dgt		
Accuracy		±2.0%rdg±8dgt				Measurement current		L-PE:7mA		
Earth						Phase rotation				
Range		20.00/200.0/2000Ω(Auto-ranging)				Measuring rang	Phase rotation	3 to 600V(45 to 65Hz)		
Accuracy		±2%rdg±0.08Ω(20.00Ω) ±2%rdg±3dgt(200.0/2000Ω)					Motor rotation	0.1 to 2V(1 to 10Hz)		
Volts						Indication	Clockwise direction: “1.2.3” and clockwise phase sequence icon Counterclockwise direction: “3.2.1” and counterclockwise phase sequence icon			
Range		300.0/600V(Auto-ranging)								
Measuring range	Volts	2 to 600V								
	Frequency	45 to 65Hz								
Accuracy	Volts	±2%rdg±4dgt								
	Frequency	±0.5%rdg±2dgt								
General										
Applicable standards		IEC 61010-1, IEC 61010-2-030 CAT IV 300V / CAT III 600V Pollution degree 2, IEC 61010-2-034 IEC 61557-1,2,3,4,5,6,7,10, IEC 60529(IP40)								
Communication interface		USB, Bluetooth® 5.0 [*]								
Power source		LR6(AA)(1.5V) × 8								
Dimension		136(L) × 235(W) × 114(D)mm								
Weight		Approx.1300g (including batteries)								
Accessories		7281(Test leads with remote control switch), 7247(Distribution board test lead) 7228A(Earth resistance test leads), 8041(Auxiliary earth spikes[2spikes/1set]) 8017B(Extension prod long), 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare), 9084(Soft case) 9142(Carrying case),9151(Shoulder strap), 9199(Shoulder pad), Batteries, Instruction manual								
Optional accessories		8259(Adapter for measurement terminal), 7272(Precision measurement cord set) 8212-USB (USB adapter), 8601(EVSE ADAPTER), 8602(EVSE ADAPTER)								

* Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®.
Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

Accessories



MODEL 7281
Test leads with remote control switch



MODEL 7247
Distribution board test leads



MODEL 7228A
Earth resistance test leads



MODEL 8017B
Extension prod long



MODEL 8041
Auxiliary earth spikes
(2spikes/1set)



MODEL 9084
Soft case




MODEL 9142
Carrying case



MODEL 9151
Shoulder strap



MODEL 9199
Shoulder pad



MODEL 8923
Fuse[0.5A/600V] × 1
(included), 1 (spare)

Optional accessories



MODEL 7272
Precision measurement cord set



MODEL 8212-USB
USB adapter



MODEL 8259
Adapter for measurement terminal



KEW 8601
EVSE ADAPTER



KEW 8602
EVSE ADAPTER

MULTI FUNCTION INSTALLATION TESTERS



KEW **6516/6516BT**



6516BT

Bluetooth

AUTO POWER OFF

TRUE RMS

MEMORY

USB

12 in 1

Insulation 100/250/500/1000V	Loop 2/20/200/2000Ω	RCD 6/10/30/100/300/500/1000mA
PSC 2000A/20kA	PFC 2000A/20kA 2000A/50kA	Earth 20/200/2000Ω
AC V 300/600V	Continuity 20/200/2000Ω	Phase rotation
Frequency	SPD(Varistor)	PAT



KEW
CONNECT
6516BT only

photo : 6516BT

Insulation

- 4 ranges available for insulation resistance test(100/250/500/1000V) Automatic discharge of circuit capacitance
- Polarization Index(PI) and Dielectric Absorption Ratio (DAR)

Loop

- High test current range of 2Ω with 0.001Ω resolution
- Zs Limit compares the values required by Electrical Installations Standard with measured results

RCD

- Type AC, A, F, B(General & Selective), EV (Electric Vehicle) and Variable RCDs
- Single and Auto test, Ramp test and Contact voltage

Earth

- Earth resistance test 2 and 3 wires with all accessories included

AC V

- True RMS Voltage measurements 2 to 600V, Mains Frequency

Continuity

- Continuity test at 200mA or 15mA with selectable buzzer for fast judgment

Phase rotation

- On 3-phase lines with clear indication of the sequence on the display

SPD (Varistor)

- Surge Protective Device test, for SPD that uses varistor

PAT

- Portable Appliance Tester function, for Insulation and Continuity

Display

- Color LCD 3.5 inches dot matrix

ATT

- Anti-Trip Technology (with 2 & 3 wires) for no trip LOOP L-PE testing on all RCDs
- With 2 wires only, very useful in case of no Neutral (e.g. 3-phase motor lines)

HELP

- Display shows how to connect the instrument according to the function selected

Memory

- Save and display up to 1000 data

Bluetooth

- Communication by "KEW CONNECT" (6516BT only)

Safety

- IEC 61010-1 CAT IV 300V / CAT III 600V, IEC 61557-1,2,3,4,5,6,7,10

Accessories



Mains test lead



MODEL 7281
Test leads with remote control switch



MODEL 7246
Distribution board test leads



MODEL 7228A
Earth resistance test leads



MODEL 8041
Auxiliary earth spikes
(2spikes/1set)



MODEL 8212-USB
USB adapter (Standard accessory for KEW 6516,
optional accessory for KEW 6516BT)



MODEL 9151
Shoulder strap

MODEL 9199
Shoulder pad

MODEL 8923
Fuse[0.5A/600V] × 1
(included), 1 (spare)



MODEL 9084
Soft case



MODEL 9142
Carrying case

MULTI FUNCTION INSTALLATION TESTERS

6516/6516BT

Insulation resistance						SPD(Varistor)
Test voltage		100V	250V	500V	1000V	1000V max.
Measuring ranges		2.000/20.00/200.0MΩ (Auto-ranging)		20.00/200.0/1000MΩ (Auto-ranging)	20.00/200.0/2000MΩ (Auto-ranging)	0 to 1049V(goes up by 1V)
Accuracy		±2%rdg±6dgt (2.000/20.00MΩ) ±5%rdg±6dgt (200.0MΩ)		±2%rdg±6dgt (20.00/200.0MΩ) ±5%rdg±6dgt (1000MΩ)	±2%rdg±6dgt (20.00/200.0MΩ) ±5%rdg±6dgt (2000MΩ)	±5%rdg±5dgt
Rated current		1.0 to 1.2mA @0.1MΩ	1.0 to 1.2mA @0.25MΩ	1.0 to 1.2mA @0.5MΩ	1.0 to 1.2mA @1MΩ	—
Output short circuit current		1.5mA max.				—
Loop impedance						
Function		LOOP ATT L-PE/L-N(3-wire)		LOOP HIGH L-PE(0.01ΩRes)	L-PE(0.001ΩRes)	L-N/L-L
Rated voltage		100 to 260V(50/60Hz)		48 to 260V(50/60Hz)		48 to 500V(50/60Hz)
Impedance range		20.00/200.0/2000Ω (Auto-ranging)			2.000Ω	20.00Ω
Accuracy		±3%rdg±6dgt		±3%rdg±10dgt	±3%rdg±4dgt	±3%rdg±25mΩ ±3%rdg±4dgt
Nominal test current at 0Ω external loop: Magnitude/Duration at 230V		L-N:6A/60ms N-PE:10mA : EV mode*1 : Normal I N-PE:6mA : Low w N-PE:4mA	L-PE:15mA	20Ω:6A/20ms 200Ω:0.5A/20ms 2000Ω:15mA/500ms	25A/20ms	6A/20ms
PSC/PFC						
Range		2000A/20kA(L-N(PSC)/L-PE(PFC))			2000A/20kA(PFC)	2000A/50kA(PFC) 2000A/20kA(PSC)
Accuracy		PSC/PFC accuracy is determined by measured loop impedance specification and measured voltage specification				
RCD						
Rated voltage		100 to 260V(50/60Hz)				
Function		x1/2, x1,x5,Ramp,Auto,Uc 6/10/30/100/300/500/1000mA/variable				
RCD type		AC(G/S)		A(G/S)	F(G/S)	B(G/S) EV
Trip current setting		x1/2,x1,Uc	10/30/100/300/500/1000mA(G) 10/30/100/300/500mA(S)		10/30/100/300mA	10/30/100/300mA 6mA (×1 only)
		x5	10/30/100mA		10/30mA	—
		Ramp	10/30/100/300/500mA		10/30/100/300mA	6mA
Accuracy	Trip current	x1/2	-8 to -2%		-10 to 0%	—
		x1	+2 to +8%		0 to +10%	—
		x5	+2 to +8%		0 to +10%	—
		Ramp	-4 to +4%		-10 to +10%	—
	Trip time	x1/2	2000ms(G/S):±1%rdg±2ms		—	—
	x1	550ms(G):±1%rdg±2ms,1000ms(S):±1%rdg±2ms		—	10.5s:±1%rdg±2ms	
	x5	410ms(G/S):±1%rdg±2ms		—	—	
Continuity						
Range		20.00/200.0/2000Ω (Auto-ranging)				
Open circuit voltage (DC)		7 to 14V				
Measuring current	200mA	200mA or more (2Ω or less)				
	15mA	15mA±3mA (short-circuit)				
Accuracy		±2%rdg±8dgt				
Phase Rotation						
Rated voltage		48 to 600V(45 to 65Hz)				
Remarks		Correct phase sequence : are displayed with “1.2.3” and arrow mark. Reverse phase sequence : are displayed with “3.2.1” and arrow mark.				
General						
Applicable standards		IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2, IEC 61010-2-034, IEC 61557-1,2,3,4,5,6,7,10, IEC 60529(IP40), IEC 61326(EMC)				
Communication interface		USB, Bluetooth® 5.0 *2				
Power source		LR6 × 8				
Dimension / Weight		136(L) × 235(W) × 114(D)mm / 1350g (including batteries)				
Accessories		Mains test lead*3, 7281(Test leads with remote control switch), 7246(Distribution board test lead), 7228A(Earth resistance test leads), 8041(Auxiliary earth spikes(2spikes/1set)) 8212-USB(USB adapter for 6516), 8923(Fuse[0.5A/600V])× 1(included), 1 (spare), 9084(Soft case), 9142(Carrying case), 9151(Shoulder strap), 9199(Shoulder pad), Batteries, Instruction manual				
Optional scssories		8212-USB(USB adapter for 6516BT), 8259(Adapter for measurement terminal), 7272(Precision measurement cord set), 8017A(Extension prod long)				

*1 The following functions have been added to KEW 6516/6516BT main unit firmware version 2.10 or later.

*2 6516BT only

Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

*3 7187A:British plug, 7218A:(EU)European SCHUKO plug, 7221A(SA) South african plug, 7222A:(AU)Australian plug

Optional accessories

MODEL 7272

Precision measurement cord set

Consists of:

- MODEL 7267 Cable reel for Earth resistance tester (Red) 20m
- MODEL 7268 Cable reel for Earth resistance tester (Yellow) 10m
- MODEL 7271 Earth resistance test lead (Green) 5m
- MODEL 8041 Auxiliary earth spikes[2spikes/1set]
- MODEL 9192 Carrying case for cord reels



Communication interface

USB



KEW Report

*Please download the software from our website.

Bluetooth®



KEW Smart
Advanced

Please search "KEW Smart"

Communication charge may be incurred separately to download application.

EVSE ADAPTERS

KEW **8601** **NEW** / **8602** **NEW**



photo : 8602



Dedicated adapter for EVSE(Electric Vehicle Supply Equipment) installation inspections, maintenance and troubleshooting

- EVSE tests under various simulations
- Touch pad for PE voltage check
- CP signal terminals for CP signal monitoring

*Supporting normal chargers (AC) only, not supporting fast (DC) chargers

	8601	8602
Plug	SAE J1772 / IEC 62196-2 type1	IEC 62196-2 type2
Rated voltage	250V AC max.	250V AC max.(Single-phase) 430V AC max.(Three-phase)
Rated frequency	50/60Hz	
Rated voltage / current of mains socket	—	10A/250V AC *8602(EU):Type E socket, 8602(UK):Type BF socket 8602(AU):Type O socket
Fuse rating	—	10A/250V AC $\phi 5 \times 20$ mm
Operating temperature and humidity range	0 to 40°C, relative humidity 80 % or less (no condensation)	
Storage temperature and humidity range	-10 to 50°C, relative humidity 80 % or less (no condensation)	
Applicable standards	IEC 61010-1 CAT II 250V IEC 61010-2-030 IEC 60529 (IP40)	IEC 61010-1 CAT II 300V IEC 61010-2-030 IEC 60529 (IP40)
Altitude	2000m or less	
Cable length	Approx. 250 mm	
Dimension	Unit: 172(L) × 105(W) × 57(D)mm Plug part: 175(L) × 60(W) × 53(D)mm	
Weight	Approx. 840g	
Accessories	9202(Carrying case) Instruction manual	8930(Fuse[10A/250V]) 9202(Carrying case) Instruction manual
Optional accessories	—	8603(TYPE1 to TYPE2 conversion adapter)

Accessory




Optional accessory



Measuring terminals

Various tests and confirmations are possible by connecting measuring instruments.



CP signal output terminals

Terminals for measuring CP signals with oscilloscope, etc.

PE PRE-TEST

Touch pad and LED to test for dangerous voltages present on the PE.

Error simulation

CP Error simulation button
The case of an earth fault in the CP line can be simulated. While this button is pressed, the EVSE output is stopped.

PE Error simulation button
This button can be used to simulate the case of a broken earth wire. While this button is pressed, the EVSE output is stopped.

KEW **8601** Type1



KEW **8602** Type2



Mains socket (8602 only)

Load current tests up to 10A can be carried out with this socket.
*Sockets are available in EU, UK and AU types.



PP(Proximity Pilot) state selector (8602 only)

This selector can be used to simulate the rated capacity of the cable in the Untethered EVSE.

Resistance between PP and PE depending on cable current rating

Cable current rating	Resistance between PP and PE
No cable	Open
13A	1.5k Ω
20A	680 Ω
32A	220 Ω
63A	100 Ω

CP(Control Pilot) state selector

By operating this selector, the connection state of the vehicle can be simulated.

- A: Not connected**
- B: Connected**
- C: Ready to charge**
- D: Ready to charge (Ventilation required)**

Tests conducted under dead-line conditions (CP STATE A)

Insulation test (for cable)

By connecting the test leads to the adapter terminal, the insulation resistance of cables can be measured for both single phase and three phase EVSE.

*Insulation measurement between wires other than PE is not possible.



Earth Continuity test (200mA)

It is possible to check continuity between the PE terminal of the adapter and the outer metal part or the earth of the electrical circuit.

Earth test (3-wire & 2-wire)

The resistance of the earth to which the EVSE is connected can be measured.


Tests conducted under live line conditions (CP STATE C, D)

Voltage

Voltage/frequency between each terminal can be measured.

Phase rotation

Phase rotation of three phase power supply can be measured.




Loop Impedance (Loop ATT function)

Loop impedance between Line-Earth can be measured.

Typical measuring instruments are designed to make Loop impedance measurements on circuits where RCDs are installed, at currents that do not trip the RCD, which is rated at 30mA.


However, the 6mA DC RCDs built into the EVSE often trip even at this current, so the KEW 6516/6516BT has a dedicated EVSE range that measures Loop impedance at even lower currents.



RCD test

IEC 60364-7-722 standard states that EVSE should have Type B, Type A or Type F RCDs, and a residual direct current detecting device (RDC-DD) complying with IEC 62955.

KEW 6516/6516BT can test above RCDs: Type A, B, F and also the test on dedicated EV type RCD (30mA AC +6mA DC), and AC type too.



Kits

KEW 6516-EV2


KEW 6516 x1
KEW 8602 x1

KEW 6516BT-EV2

KEW 6516BT x1
KEW 8602 x1



POWER METERS

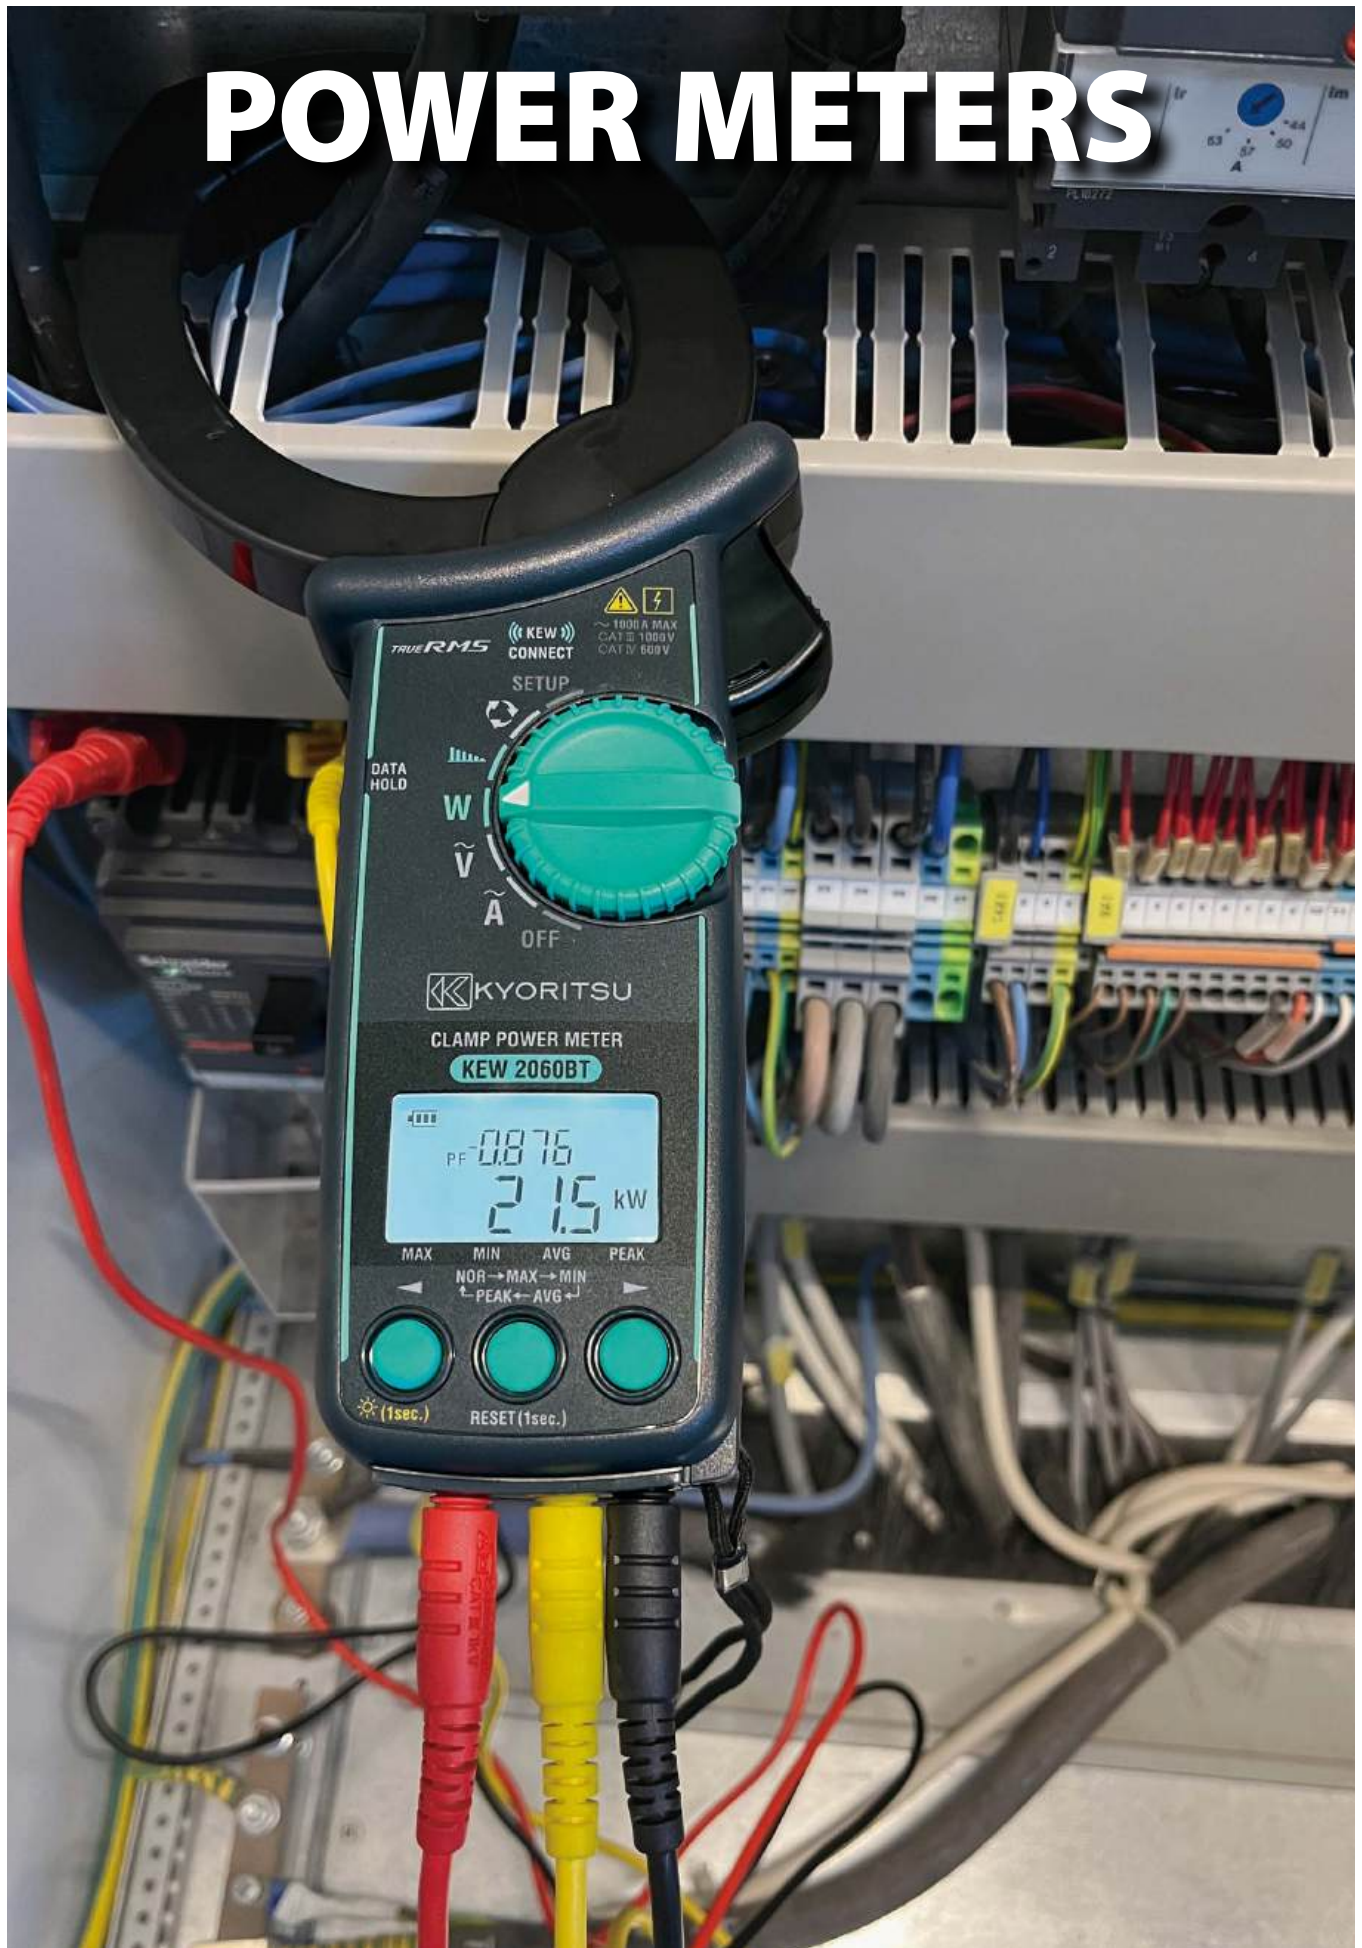

CLAMP POWER METERS

KEW 2060BT/2062/2062BT



KEW
CONNECT

Wireless communication
with smartphone or tablet
(Except for 2062)



photo : 2060BT

photo : 2062

photo : 2062BT

	2060BT	2062/2062BT
Wiring connections	1P2W, 1P3W ¹ , 3P3W, 3P4W	
Measurements and parameters	Voltage, Current, Frequency, Active power, Reactive power, Apparent power, Power factor (cos θ), Phase angle, Harmonics (THD-R/THD-F), Phase rotation	
ACV		
Range	1000V	
Accuracy	±0.7%rdg±3dgt(40.0 to 70.0Hz) ±3.0%rdg±5dgt(70.1Hz to 1kHz)	
Crest factor	1.7 or less	
ACA		
Range	40.00/400.0/1000A (3 range auto)	
Accuracy	±1.0%rdg±3dgt(40.0 to 70.0Hz) ±2.0%rdg±5dgt(70.1Hz to 1kHz)	
Crest factor	3 or less on 40.00/400.0A range, 3 or less 1500A peak on 1000A range	
Frequency		
Display range	40.0 to 999.9Hz	
Accuracy	±0.3%rdg±3dgt	
Active power		
Range	40.00/400.0/1000kW	
Accuracy	±1.7%rdg±5dgt (PF1, sine wave, 45-65Hz)	
Apparent power		
Range	40.00/400.0/1000kVA	
Accuracy	±1dgt against each calculated value Sum: add errors of each channel, 3P3W: ±2dgt, 3P4W: ±3dgt	
Reactive power		
Range	40.00/400.0/1000kVar	
Accuracy	±1dgt against each calculated value Sum: add errors of each channel, 3P3W: ±2dgt, 3P4W: ±3dgt	
Power factor		
Display range	-1.000 to 0.000 to +1.000	
Accuracy	±1dgt against each calculated value Sum: add errors of each channel, 3P3W: ±2dgt, 3P4W: ±3dgt	
Phase angle(1P2W only)		
Display range	-180.0 to 0.0 to +179.9	
Accuracy	Within ±3.0°	
Harmonics RMS(Content rate)		
Analysis order	1st to 30th order	
Accuracy	±5.0%rdg±10dgt (1 to 10th) ±10%rdg±10dgt (11 to 20th) ±20%rdg±10dgt (21 to 30th)	
Total harmonics THD-R/THD-F		
Display range	0.0 to 100.0%	
Accuracy	±1 against the calculated results of each measured value.	
Phase rotation	80 to 1100V AC (45 to 65Hz)	
Other functions	MAX/MIN/AVG/PEAK, Data hold, Bluetooth® (Except for 2062), Backlight, Auto power off	
General		
Communication interface	Bluetooth®5.0 ²	
Power source	LR6(AA)(1.5V) ×2	
Continuous measuring time	Approx. 58 hours	
Conductor size	φ75mm max. (busbar 80×30mm)	φ55mm max.
Dimension / Weight	283(L)×143(W)×50(D)mm / Approx. 590g (including batteries)	247(L)×105(W)×50(D)mm / Approx. 490g (including batteries)
Applicable standards	IEC 61010-1, IEC 61010-2-032, IEC 61326-1, 2-2 Class B CAT IV 600V / CAT III 1000V Pollution degree 2	
	CAT IV 300V / CAT III 600V / CAT II 1000V Pollution degree 2	
Accessories	7290 (Voltage test lead set), 9198 (Carrying case), Batteries, Instruction Manual	

*1 Select "1P2W" for the measurement of 1P3W system and measure the power of each phase (L1/L2) respectively. Unable to display the total power of 1P3W.

*2 Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth[®]. Please confirm it with your distributor before purchasing our products equipped with Bluetooth[®].

- Current up to 1000A rms
- Voltage up to 1000V rms
- Harmonics up to 30th


Jaw shape with emphasis on the safety and the usability

- KEW 2060BT has a newly designed special jaw shape for using at a large busbar
Extremely large jaw with tear drop shape can clamp a large busbar with safe (Conductor size 75mm, Busbar 80mm x 30mm)
- KEW 2062 and KEW 2062BT have a tear drop shape jaw, and the size is convenient to use at a small-sized office and factory (Conductor size 55mm)

Power measurement on any wiring system is possible.

KEW 2060BT, KEW 2062 and KEW 2062BT can perform 1P2W measurement and balance and unbalance measurements of 3P3W / 3P4W.
The double display can simultaneously show many parameters like W & PF, W & deg, W & VA, W & Var, V & A, etc.

* E.g.: 3P4W (Balance)



Use the application KEW Power* to improve work efficiency (Except for 2062)



Display image



Download and install our special application "KEW Power*" in your smartphone or tablet device for logging the measured values. Remote monitoring of voltage, current, power, trend graph of harmonics, and waveform is possible with "KEW Power*"; this is helpful for simple Power Quality check. Measured values can be saved in your smartphone or tablet device in csv format: the data is editable in excel format.

Accessories



MODEL 7290



MODEL 9198

POWER METERS

KEW **6305**

RMS MEMORY USB Bluetooth External Power Supply



CE



- Comprehensive real-time monitoring, recording and analysis of single and 3-phase systems
- Voltage, Current, Power Factor and Frequency measurements
- Power analysis (Active, Apparent and Reactive power)
- Energy analysis (Active, Apparent and Reactive energy)
- Active power accuracy: $\pm 0.3\% \text{rdg} \pm 0.2\% \text{f.s.}$
- Automatic wiring check function to prevent incorrect connections
- Large memory capability (2GB) using built-in SD card interface
- Recording interval can be set between 1 second and 1 hour
- Real-time and remote measurements
- Windows software for data analysis and setting via USB port or Bluetooth®

- Synchronous measurements between two units of KEW 6305
- Wide selection of clamp sensors allow measurements from 0.1 to 3000A
- Automatic recognition of connected sensor type
- Double power supply system via AC line and batteries

As easy as 1 → 2 → 3 !

Starting from OFF position and rotating the Rotary switch clockwise, KEW 6305 is ready to use in 3 simple steps

1. SET UP

Rotate the Rotary switch to SET UP. All the instrument settings can be easily selected by using instrument buttons. All the settings can also be selected by connecting KEW 6305 to a PC via USB or Bluetooth®.

2. WIRING CHECK

Rotate the Rotary switch to WIRING CHECK. The Automatic Wiring check function will prevent incorrect connections, check the connections and display the results on the LCD. Error messages appear on display to indicate wrong orientation of Clamp sensors or incorrect connections.

Everything is OK



Shows "Good"

Error is found



Shows "Err" (Error) e.g.: Err PH A
→ Current phase (orientation of sensor) may be incorrect.

3. W/Wh/DEMAND Measurements

Rotate the Rotary switch to W/Wh/DEMAND. The instrument can perform Instantaneous, Integration and DEMAND measurements. Press START / STOP button to start / stop recording.


	6305
Wiring connections	1P2W, 1P3W, 3P3W, 3P3W3A, 3P4W
Measurements	Voltage, Current, Frequency, Active power
Parameters	Apparent power, Reactive power, Active energy, Apparent energy, Reactive energy, Power factor (cos θ), Neutral current
Voltage range[RMS]	150.0/300.0/600.0V
Voltage accuracy	$\pm 0.2\% \text{rdg} \pm 0.2\% \text{f.s.}$ (sine wave, 45 to 65Hz)
Current range[RMS]	10.00/50.00/100.0/250.0/500.0A/Auto (with clamp sensor MODEL 8125)
Current accuracy	$\pm 0.2\% \text{rdg} \pm 0.2\% \text{f.s.}$ + Accuracy of Clamp sensor (sine wave, 45 to 65Hz) +1% f.s. at the lowest range.
Effective input range	10 to 110% of rating range
Display range	5 to 130% of each range (Voltage) / 1 to 130% of each range (Current)
Crest factor	Voltage : 2.5 or less, Current : 3.0 or less (1.4Vpeak max.)
Active power accuracy	$\pm 0.3\% \text{rdg} \pm 0.2\% \text{f.s.}$ + Accuracy of Clamp sensor +1% f.s. when the lowest current ranges is selected. *When measuring 3P3W system with 3P3W3A setting, distorted voltage or current may cause reading error in proportion to the magnitude of each distortion.
Effect of power factor	Active power: $\pm 1.0\% \text{rdg} \cos \theta = \pm 0.5$ (PF=1)
Frequency meter range	40.0 to 70.0Hz
Frequency meter accuracy	$\pm 3 \text{dgt}$
Accuracy precondition	PF=1, Sine wave, 45 to 65Hz, 23°C $\pm 5^\circ\text{C}$
Display update period	1 second
Operating temperature and humidity range	0 to +50°C, relative humidity 85% or less(no condensation)
Storage temperature and humidity range	-20 to +60°C, relative humidity 85% or less(no condensation)
Communication interface	USB, Bluetooth® 5.0 ^{*1}
PC card interface	SD card (2GB)
Applicable standards	IEC 61010-1 CAT III 600V, IEC 61326
Power source (AC Line)	100 to 240V $\pm 10\%$ (45 to 65Hz)
Power source (DC battery)	LR6 or Ni-MH(HR-15-51) $\times 6$ (Battery charger not included), Battery life approx. 15h (LR6)
Power consumption	10VA max.
Dimension / Weight	175(L) \times 120(W) \times 65(D)mm / Approx. 800g (including batteries)
Accessories	7141B (Voltage test lead set), 7148 (USB cable) 7170(Power cord(EU)) or 7240(Power cord(UK)), 9125(Carrying case) 8326-02 (SD card [2GB]), Batteries, Quick manual
Optional accessories	8124, 8125, 8126, 8127, 8128(Load current Clamp Sensor) 8130, 8133, 8135(Flexible Clamp Sensor) 8312(Power supply adapter), 9132(Carrying case with magnet)

*1 Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

POWER METERS

Bluetooth® communication with Android application

Free Android software "KEW Smart 6305" is available on download site



*communication charges may be incurred separately to download application

Real-time and remote measurements using Android application

Measurement can be displayed in graphic or numeric forms on Android devices in real-time via Bluetooth® communication.
Remote checking of measurements is possible without accessing KEW 6305.



Max communication distance: 10m

Windows software

Automatic creation of graph and list from recorded data.
Centralized management of setting and recorded data acquired from multiple devices.
Data can be expressed in crude oil and CO₂ equivalent values in the report.



System requirements

OS: Windows® 11/10
Display: XGA(Resolution 1024 × 768 dots) or more
Required HDD space: 1Gbyte or more
Others: USB port
.NET Framework (4.6.1 or later).


*Please download the software from our website.

Optional accessories

Load current clamp sensors



Load current flexible clamp sensors

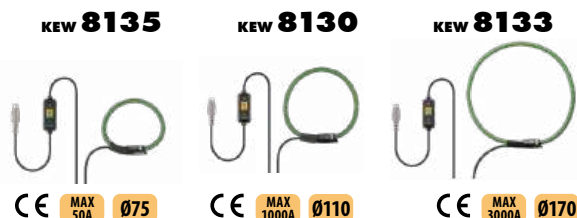

Power supply adapter

MODEL 8312

For taking single phase supply (100 to 240V) from the test leads to power the instrument (Fuse: 8923)



Carrying case with magnet

MODEL 9132

For mounting inside metal distribution boards



SD card interface

SD cards up to 2GB can be used.

Max amount of data (reference)

Data saved on:	SD card	Internal memory
Capacity	2GB	3MB
Instantaneous measurement	6,670,000	10,000
Integration / demand measurement interval		
1 sec.	17 days	33 minutes
1 min.	992 days	33 hours
30 min.	3 years or more	42 days
Max number of files	511	4

*in case the SD card is empty

Selection Guide of Power Meters


		Clamp Power Meter			Power Quality Analyzer
		2060BT	2062	2062BT	6305
Appearance					
Voltage [V]		✓	✓	✓	✓
Current [A]		✓	✓	✓	✓
Power [W]		✓	✓	✓	✓
Frequency [Hz]		✓	✓	✓	✓
Energy [Wh]		—	—	—	✓
Harmonics		✓	✓	✓	✓
Power Quality	Swell	—	—	—	✓
	Dip	—	—	—	✓
	Interruption	—	—	—	✓
	Transients	—	—	—	✓
	Inrush Current	—	—	—	✓
Conductor size		φ75mm	φ55mm	φ55mm	—
Memory		—	—	—	SD card
Number of Input Channel		4ch (V3, A1)	4ch (V3, A1)	4ch (V3, A1)	6ch (V3, A3)
Communication interface		Bluetooth®	—	Bluetooth®	USB, Bluetooth®

POWER QUALITY ANALYZER

KEW **6315**



True RMS MEMORY USB Bluetooth External Power Supply

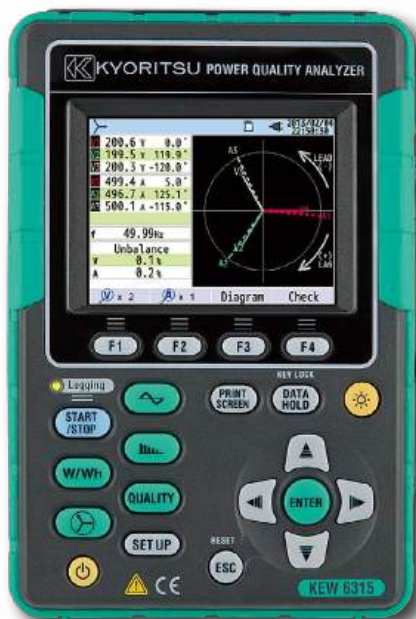

- Simultaneous Power & Power quality measurements
Power/Harmonics/Waveform/Power quality are recorded at all CHs (Voltage:3ch,Current 4ch)
- Helpful support functions
Quick Start Guide,Wiring check and Sensor detection for easy and reliable measurement
- Measurement with high accuracy
Guaranteed accuracy: $\pm 0.3\% \text{rdg}(\text{energy})$,
 $\pm 0.2\% \text{rdg}(\text{voltage/current})$
Complies with the International Standard
IEC 61000-4-30 Class S and the European Standard EN50160
- Energy consumption check on site
Trend and demand graphs for easy recognition
- TFT color display with high resolution
- IEC 61010-1 CAT IV 300V / CAT III 600V / CAT II 1000V

		6315
Wiring connections		1P2W, 1P3W, 3P3W, 3P4W
Measurements and parameters		Voltage, Current, Frequency, Active power, Reactive power, Apparent power, Active energy, Reactive energy, Apparent energy, Power factor (cos θ), Neutral current, Transients/ Demand, Harmonics, Quality(Swell/Dip/Interruption, voltage, Inrush current, Unbalance rate), Phase advance condenser, IEC Flicker
Other functions		Digital output function, External communication function,Scaling function
Voltage [RMS]	Range	600.0/1000V
	Accuracy	600.0V Range : (sine wave 40 to 70Hz) 10 to 150% against 100V or more of nominal V : Nominal V $\pm 0.5\%$ Out of above range : $\pm 0.2\% \text{rdg} \pm 0.2\% \text{f.s.}$ 1000V Range : $\pm 0.2\% \text{rdg} \pm 0.2\% \text{f.s.}$ (sine wave 40 to 70Hz)
	Allowable input	1 to 120% of each range (rms). 200% of each range (peak)
	Display range	0.15 to 130% of each range
	Crest factor	3 or less
	Sampling speed	24 μ s
Current [RMS]	Range	8128/8135(50A type): 5000mA/50.00A/AUTO 8127(100A type): 10.00/100.0A/AUTO 8126(200A type): 20.00/200.0A/AUTO 8125(500A type): 50.00/500.0A/AUTO 8124/8130(1000A type): 100.0/1000A/AUTO 8146/8147/8148(10A type): 1000mA/10.00A/AUTO 8133(3000A type): 300.0/3000A/AUTO
	Accuracy	$\pm 0.2\% \text{rdg} \pm 0.2\% \text{f.s.}$ + accuracy of clamp sensor (sine wave, 40 to 70Hz)
	Allowable input	1 to 110% of each range (rms). 200% of each range (peak)
	Display range	0.15 to 130% of each range
	Crest factor	3 or less
	Influence of power factor	$\pm 1.0\% \text{rdg}$ (reading at power factor 0.5 against power factor 1)
Active power		Accuracy $\pm 0.3\% \text{rdg} \pm 0.2\% \text{f.s.}$ + accuracy of clamp sensor (power factor 1, sine wave, 40 to 70Hz)
Frequency meter range		40 to 70Hz
Power source (AC Line)		100 to 240V(50/60Hz)7VA max.
Power source (DC battery)		LR6 or Ni-MH(HR15-51) \times 6 Battery life approx. 3h (LR6,Backlight OFF)
Memory card		SD card (2GB)
Communication interface		USB, Bluetooth [®] 5.0*
Display		320 \times 240(RGB)Pixel, 3.5inch color TFT display
Temperature and humidity range		23 \pm 5 $^{\circ}$ C, relative humidity 85% or less(no condensation)
Operating temperature and humidity range		0 to 45 $^{\circ}$ C, relative humidity 85% or less(no condensation)
Storage temperature and humidity range		-20 to 60 $^{\circ}$ C, relative humidity 85% or less(no condensation)
Applicable standards		IEC 61010-1 CAT IV 300V / CAT III 600V / CAT II 1000V Pollution degree 2 IEC 61010-2-030, IEC 61010-031, IEC 61326, EN 50160 IEC 61000-4-30 Class S, IEC 61000-4-15, IEC 61000-4-7
Dimension / Weight		175(L) \times 120(W) \times 68(D)mm / Approx. 900g
Accessories		7141B(Voltage test lead set), 7170(Power cord(EU)) or 7240(Power cord(UK)) 7219(USB cable), 8326-02(SD card (2GB)), 9125(Carrying case) Input terminal plate \times 6, Batteries, Quick manual

*Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth[®]. Please confirm it with your distributor before purchasing our products equipped with Bluetooth[®].

Simultaneous Power & Power quality measurements



Power & Energy



Instantaneous value

- Measures instantaneous / average / min / max for voltage, current, active / reactive / apparent power, PE(cos θ) and line frequency all on one screen.
- Trend of all main parameters and customized Zoom functions.

Integration value

- The display will list the active / reactive / apparent energy in total and for each phase consumed (or generated in case of co-generation like solar panels, etc).

Demand

- To support demand control, present energy usage and estimated value are displayed on a graph while recording max demand value and the occurred time.



Vector

- Can display voltage and current by vector per Ch.



Waveform

- Displays voltage and current on each Ch by waveform.




Harmonics Analysis

- Graphic display of harmonic components up to 50th order for voltage, current and power.



Event


- Measures voltage swells / dips / interruptions / transients and inrush currents that may indicate a weak power distribution system. Such phenomena may damage or reset devices. All necessary data is displayed by pressing one key.

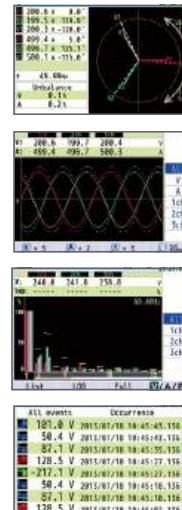

POWER QUALITY ANALYZER

Quick Start Guide

One-Touch START/STOP Key for Quick Start Guide providing easy setup guides.

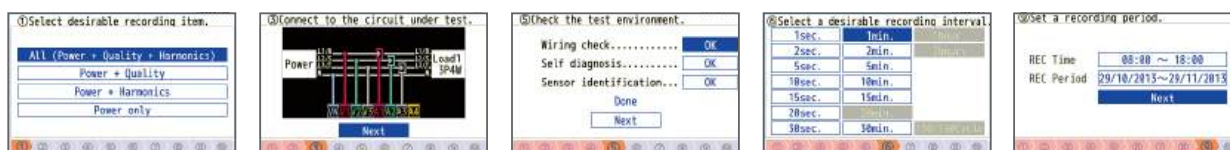

Guide start

Connect to the circuit

Wiring check


Select interval

Set recording time

Start recording

Windows software for data analysis and setting via USB port

- Automatic creation of graph and list from recorded data.
- Centralized management of setting and recorded data acquired from multiple devices.
- Data can be expressed in crude oil and CO₂ equivalent values in the report.
- EN 50160 report can be generated after survey.




System requirements

OS: Windows® 11/10
Display: XGA(Resolution 1024 x 768 dots) or more
Required HDD space: 1Gbyte or more
Others: USB port
.NET Framework (4.6.1 or later)

*Please download the software from our website.

Real-time and remote measurements

- Measurements can be graphically displayed on Android devices or PC in real-time via Bluetooth® communication.

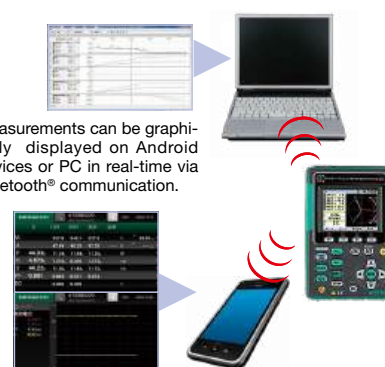

Optional accessories

Load current clamp sensors




Leakage & Load current clamp sensors



*8146/8147/8148 can measure up to 10A for use in KEW 6315

Load current flexible clamp sensors

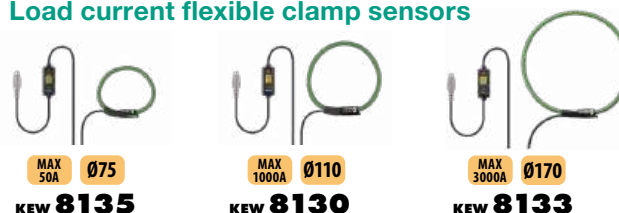

SD card interface

SD cards up to 2GB can be used

Possible recording time
When the 2GB of SD is used:

8326-02

Interval	REC item	
	Power	+Harmonics
1 sec.	13 days	3 days
1 min.	1 year or more	3 months
30 min.	10 year or more	7 year or more

Data of power quality events are not considered to estimate the possible recording time. The max possible time will be shortened by recording such events.

MODEL 8312

MODEL 9132

Distribution board door can be closed during measurement?

KEW 6315 facilitates safe testing thanks to its extreme compact design and with two attractive optional accessories: a carrying case with magnet (9132) for attaching it to the sides of metal enclosures and a power supply adapter (8312) which takes the power for the instrument from the supply being measured.





KEW 5020 (for Current/Voltage)

RMS **MEMORY** **USB** **External Power Supply**

3 channel inputs for the simultaneous recording of Leakage Current, Load Current and Voltage

Power Quality analysis

(Power Quality: Reference voltage, Swell, Dip, Short power Interruptions)

Large capacity for storing 60,000 data points

60,000 data points can be recorded when 1ch is used, and when all the three channels are used, 20,000 data points per channel can be recorded

Lowpass Filter will filter out the harmonics

(Cutoff Frequency = Approx. 160Hz)

LED blinks when the preset current / voltage value is exceeded

(Available for Trigger / Capture Recording, Power Quality Analysis modes)

CALL : Confirmation of recorded data

- The following can be displayed: number of recorded data points, (max+ min+ peak) value for each channel complete with time/date information in the Normal recording mode (Detected values (i.e. when values are outside preset limits) can be displayed in other recording modes)
- RECALL: The last 10 recorded data points including time/date can be recalled on the logger display



Selection of One-time mode or Endless mode

One-time on : →

Recording will stop when memory is used up

One-time off : ←

Overwrite the old data, and store the latest data

Non Volatile Memory

Recorded data will be retained even if the batteries are exhausted or replaced due to the presence of a nonvolatile memory

Battery power indicator

Indicates battery voltage in 4-levels

(It is possible to use the logger for a further approx. 24 hours even after the warning symbol is flashing)

User-friendly PC software "KEW LOG Soft2" is available

- This permits editing, analysis and graphical display of data
- The recorded data is downloadable to a PC via USB cable
- Variation of the measured voltage and current data can be confirmed simultaneously on the PC display monitor
- Simplified Power Integration
(The "KEW LOG Soft2" uses current and voltage recorded to calculate the integral power consumption)
- Continuous measuring time : Approx. 10 days (Alkaline Battery)

5020	
Recording mode	Normal, Trigger, Capture, Power quality analysis
Operating system	Successive approximation(CH1 single synchronized sampling)
Rated max working voltage	9.9Vrms AC, 14V peak value
Number of input channel	3ch
Measuring method	True RMS
RMS measuring interval	Approx. 100ms
Sampling interval	: Normal / Trigger mode Approx. 1.65ms/CH : Capture mode Approx. 0.55ms (waveform: at every 1.1ms) : P.Q.A mode Approx. 0.55ms
Low battery warning	Battery mark display (in 4 levels)
Over-range indication	"OL" mark is displayed when exceeding the measuring range
Auto power off	Turns off the instrument automatically if there is no switch operation for about 3 min.(This function doesn't work during a recording.)
Location for use	Indoor use, Altitude up to 2000m
Operating temperature and humidity range	-10 to 50°C, relative humidity 85% or less (no condensation)
Battery	LR6(AA)(1.5V) × 4 / External supply 9V DC(Special AC Adapter)
Possible measurement time	Approx. 10days (with alkaline LR6 batteries)
Applicable standards	IEC 61010-1 CAT III 300V Pollution degree2, IEC 61326 (EMC)
Dimension	111(L) × 60(W) × 42(D)mm
Weight	Approx. 265g
Accessories	9118(Carrying case), 7148(USB cable), Batteries Instruction manual, Quick manual, USB Notice sheet
Optional accessories	8146,8147,8148(Leakage & Load current clamp sensor), 8121,8122,8123,8124,8125,8126,8127,8128(Load current clamp sensor) 8130,8135(Flexible clamp sensor), 8309(Voltage sensor), 8320(AC adapter), 9135(Carrying case), 7185(Extension cable)

Normal Recording Mode

(AC 50/60Hz, Sine wave, Input: 10% or more of the range at CH1)

Range	RMS Accuracy
100.0mA	±2.0%rdg±0.9%f.s. + Accuracy of sensor
Other ranges	±1.5%rdg±0.7%f.s. + Accuracy of sensor
Crest factor	2.5 or less :RMS accuracy(sine)+ 2%rdg+1%f.s.

*Max, Min and Instant Peak values in Normal Recording mode are just reference values; their accuracies aren't guaranteed.

Trigger Recording Mode

(AC 50/60Hz sine wave)

Range	Accuracy
100.0mA	±3.5%rdg±2.2%f.s. + Accuracy of sensor
Other ranges	±3.0%rdg±2.0%f.s. + Accuracy of sensor

Capture/ Power Quality Analysis Recording Mode

Range	Accuracy
100.0mA	±3.0%rdg±1.7%f.s. + Accuracy of sensor
Other ranges	±2.5%rdg±1.5%f.s. + Accuracy of sensor


4 recording modes make various measurements possible



Normal recording mode

NORM For monitoring power line status or an intermittent leakage.


- Records the variation of the current / voltage in a given interval (For monitoring the variation of the current / voltage against time).
- A choice of 15 recording intervals are available: 1 sec. to 60 min. (1,2,5,10,15,20,30 sec, 1,2,5,10,15,20,30,60 min.)
- The average of the measured value in every recording interval is recorded. The Max., Min. and Peak values (sampled crest value converted to sine RMS value) are recorded every 10 readings.



Capture recording mode

CAP For observing waveforms easily.

- Waveform display via a PC by sampling the inputs every 0.55ms.
- When the preset current / voltage value is exceeded, instantaneous values are recorded for 200ms (from 10(50Hz) to 12 (60Hz) waveforms) before and after preset value is exceeded.
- LED blinks when the measured values exceed the preset current / voltage value.



Trigger recording mode

TRIG For observing an irregular operation of an ELCB/RCD and irregular current / voltage.


- Detects the value, time and frequency of the current / voltage when the preset value is exceeded.
- When the detection level (i.e. preset value) is exceeded, 8 data points (True RMS values for approx. 0.8 sec.) and peak value are recorded before and after the preset value is exceeded.
- Inrush current or an abnormal current / voltage can be detected by sampling the inputs at every 1.6ms.
- LED blinks when the measured values exceed the preset current / voltage value.



Power Quality Analysis Mode

PQA For monitoring and observing voltage fluctuations.

- Detects the reference voltage, Swell, Dip and Short Interruption. Records the values detected with the start time and end time.
- Samples the inputs every 0.55ms and detects the voltage fluctuation every 10ms.
- LED blinks when the voltage fluctuation is detected.



Analyzing and processing the recorded data with a PC

The user friendly PC software “KEW LOG Soft2” is supplied.

Software is Enhanced!


- The type of the sensor connected to the logger will be automatically recognized.
- Just click appropriate dialog boxes for set up if it is not required to input any comments.
- By using commercially available USB hub, multiple loggers can be connected to a PC and can set the synchronized time.

*Please download the software from our website.


System requirements

OS: Windows® 11/10
Display: XGA(Resolution 1024 × 768 dots) or more
Required HDD space: 1Gbyte or more
Others: USB port

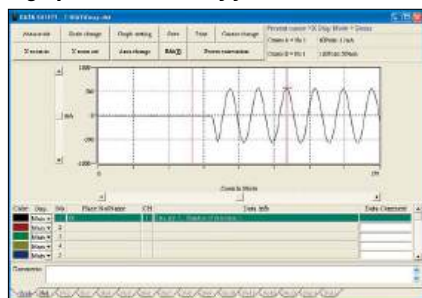

A graph can be made by just one click

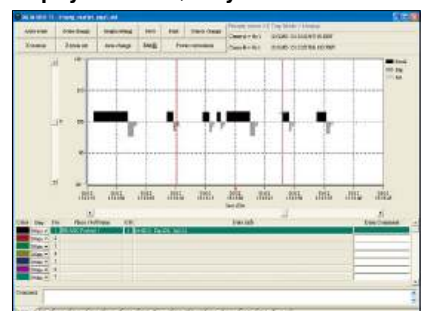

Display of Power Quality



Selection Guide of Loggers

	Loggers	
	5020	5050
Appearance		
Voltage [V]	✓	✓
Current [A]	✓	✓
Ior Resistive leakage current [mA]	—	✓
Frequency [Hz]	—	✓
Power Quality	Swell	—
	Dip	—
	Interruption	—
	Inrush Current	—
Memory	Inner memory	SD card
Number of Input Channel	3ch	5ch (V1, A4)

KEW 5050




CE

KEW 5050 is an innovative Leakage Current Logger that can identify the resistive component of leakage current (Ior) in an electrical installation. Despite the capacitive component, the Ior is the dangerous component of the leakage current because Ior consumes power and then it can cause a rise in temperature that can lead to a fire and electric shock.

- Provides simultaneous measurements and logs up to 4 channels
- Supports various wiring systems
(Single-phase 2&3-wire, Three-phase 3&4-wire*) *Except Ior for 3 Phase 4 wire
- World's fastest class speed at 200ms interval for leakage current measurement
- Offers both traditional leakage / load current measurements
- Large graphic display and magnet on the back case to attach it on metal enclosures

Can measure up to 4 channels simultaneously!

Best to diagnose unwanted RCD tripping

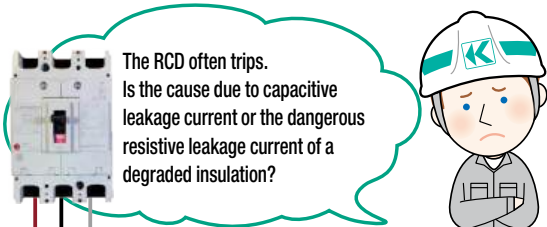

Ior LOGGER

Gapless continuous measurement

Performs fast sampling (24.4 μ s) continuously with gapless during logging to prevent intermittent leakages being overlooked as an event or max value.



	5050
Wiring configuration	1P2W, 1P3W, 3P3W, 3P4W
Measurements and parameters	Ior : Leakage current (TRMS) with resistive components only Io : Leakage current (TRMS) with basic wave of 50/60Hz only Iom : Leakage current (TRMS) including harmonic components V : Reference voltage (TRMS) with basic wave of 50/60Hz only Vm : Reference voltage (TRMS) including harmonic components R : Insulation resistance, Frequency(Hz), Phase angle(θ)
Other functions	Digital output, Print screen, Backlight, Data hold
Recording Interval	200/400ms/1/5/15/30s/1/5/15/30m/1/2hours
Ior	
Range	10.000/100.00/1000.0mA/10.000A/AUTO
Accuracy	For reference voltages of sine wave 40 to 70Hz and 90V TRMS or higher, $\pm 0.2\%rdg \pm 0.2\%f.s.$ + clamp sensor amplitude accuracy + error of phase accuracy* (phase error) * add $\pm 2.0\%rdg$ to measured Io value when using Ior leakage clamp sensor. (θ : within the accuracy of reference voltage/ current phase difference $\pm 1.0^\circ$)
Allowable input	1 to 110% (TRMS) of each range, and 200% (peak) of the range
Display range	0.15 to 130% (display "0" for less than 0.15%, "OL" if the range is exceeded)
Io *Range, Allowable input and Display Range are the same as Ior .	
Accuracy	$\pm 0.2\%rdg \pm 0.2\%f.s.$ + clamp sensor amplitude accuracy
Iom *Range, Allowable input and Display Range are the same as Ior .	
Accuracy	$\pm 0.2\%rdg \pm 0.2\%f.s.$ + clamp sensor amplitude accuracy
Measurement method	Sampling speed 40.96ksp/s (every 24.4 μ s), gapless, calculate TRMS values every 200ms.
Voltage	
Range	1000.0V
Accuracy	$\pm 0.2\%rdg \pm 0.2\%f.s.$ * for waveforms of sine wave 40 to 70Hz
Allowable input	10 to 1000V TRMS, and 2000V peak
Display range	0.9 to 1100.0V TRMS (display "0" for less than 0.9V, "OL" if the range is exceeded)
Phase angle(θ)	
Display range	0.0 to $\pm 180.0^\circ$ (regarding the phase of reference voltage as 0.0 $^\circ$)
Accuracy	Within $\pm 0.5^\circ$ for the inputs of 10% or higher of leakage current range, sine wave 40 to 70Hz, reference voltage of 90V TRMS or higher. Within $\pm 1.0^\circ$ when using Ior leakage clamp sensor, and Within $\pm 0.5^\circ$ + clamp sensor accuracy when using general purpose clamp sensor.
Frequency meter range	40 to 70Hz
External supply	100 to 240V AC(50/60Hz) 7.5VA max.
Power source	LR6(AA)(1.5V) \times 6 (Battery life approx. 11h)
Display / update period	160 \times 160dots, FSTN monochrome display / 500ms
PC card interface	SD card (2GB) *standard accessory
Communication interface	USB
Temperature and humidity range	23 \pm 5 $^\circ$ C, relative humidity 85% or less(no condensation)
Operating temperature and humidity range	-10 to 50 $^\circ$ C, relative humidity 85% or less(no condensation)
Storage temperature and humidity range	-20 to 60 $^\circ$ C, relative humidity 85% or less(no condensation)
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2 IEC 61010-2-030, IEC 61010-031, IEC 61326
Dimension / Weight	165(L) \times 115(W) \times 57(D)mm / Approx. 680g (including batteries)
Accessories	7273(Voltage test lead) 8262(AC adapter) 7278(Earth cable) 7219(USB cable) 8326-02(SD card [2GB]) 9125(Carrying case) Batteries Instruction manual, Cable marker
Optional accessories	8177(Ior Leakage current Clamp Sensor 10A type ϕ 40mm) 8178(Ior Leakage current Clamp Sensor 10A type ϕ 68mm) 8329(Power supply adapter)
Optional sensors (It cannot be used for Ior measurement)	8146, 8147, 8148 (Leakage & Load current Clamp Sensor) 8130, 8133 (Flexible Clamp Sensor) 8121, 8122, 8123 (Load current Clamp Sensor) 8124, 8125, 8126, 8127, 8128 (Load current Clamp Sensor)

Shows insulation resistance (R) values determined by the following formula.


V: Reference voltage/ Ior: Leakage current

Displayed value is just for reference since the measurement method differs from insulation resistance testers and may not be consistent with each other.

In case of 3P3W and 3P4W, for a correct Ior reading, the capacitance effect of each phase must be equal.


Quickly displays occurred events

Detailed information on the occurred events are displayed on the LCD. Different threshold values can be set for each channel and each event.

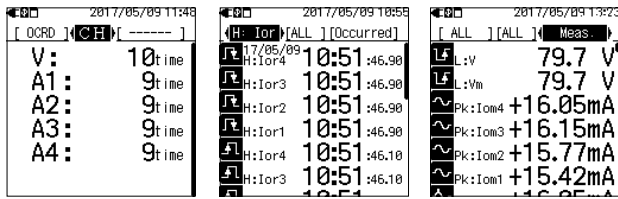


Various display modes

User-friendly graphical display of connections and phase differences

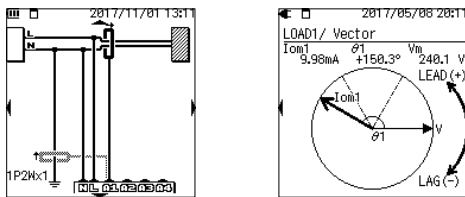

New Measurement method with FFT

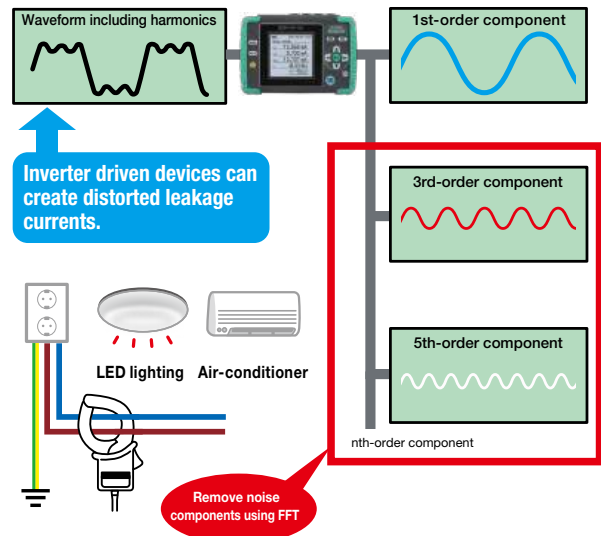

Unlike to traditional measuring apparatus, less susceptible to harmonics noises.

Successfully achieving logging with no effects of harmonics by True RMS calculation every 200 ms using FFT (Fast Fourier Transform).

Windows software

Automatic generation of graphs and lists based on the recorded data by just one click.
Data can be checked without using this software by changing the file extension to csv or others.



System requirements

OS: Windows® 11/10
Display: XGA (1024 x 768) or more
Required HDD space: 1Gbyte or more
Others: USB port,
.NET Framework 3.5, 4.6

*Please download the software from our website.

SD card interface

Achieves long period of data logging. In case of sudden power interruption, data stored in the SD card aren't lost.



Possible recording time (with 2GB SD card)			
Interval	REC item		
	1P3W x 1	1P3W x 4	3P4W x 4
200 ms	25 days	8 days	7 days
1 sec.	38 days	11 days	9 days
2 sec.	76 days	22 days	18 days
5 sec.	6.5 months	1.8 months	1.5 months
15 sec.	1 year or more	5 months	4 months
30 sec.	–	11 months	9 months
1 min. or more	–	1 year or more	

Accessories



MODEL 7273
Voltage test lead
3,000mm



MODEL 8262
AC adapter



MODEL 7278
Earth cable
1,500mm



MODEL 7219
USB cable
1,950mm



MODEL 8326-02
SD card [2GB]



MODEL 9125
Carrying case



Cable marker

Optional accessories

Ior Leakage current Clamp Sensor

KEW 8178



MAX 10A

KEW 8177



MAX 10A

Power supply adapter

MODEL 8329



Power source can be taken through the measured line (100 to 240V) (Fuse : 8923)

Optional accessories of Loggers, Power Meter and Power Quality Analyzer

Applicable model table

Sensor	Load current		5020	5050	6305	6315
		8121	✓	✓*5	—	—
		8122	✓	✓*5	—	—
		8123	✓	✓*5	—	—
		8124	✓	✓*5	✓	✓
		8125	✓*1	✓*5	✓	✓
		8126	✓*2	✓*5	✓	✓
		8127	✓*3	✓*5	✓	✓
		8128	✓	✓*5	✓	✓
	Flexible type	8130	✓*4	✓*5	✓	✓
		8133	—	✓*5	✓	✓
		8135	✓	—	✓	✓
	Leakage & Load current	8146	✓	✓*5	—	✓*6
		8147	✓	✓*5	—	✓*6
		8148	✓	✓*5	—	✓*6
	Ior Leakage current	8177	—	✓	—	—
		8178	—	✓	—	—
	Voltage sensor	8309	✓	—	—	—
Adapter		8312	—	—	✓	✓
		8320	✓	—	—	—
		8329	—	✓	—	—
Case		9132	—	—	✓	✓
		9135	✓	—	—	—

*1-4: Sensors can be used from the following serial numbers onwards.

*1: 8125 No.02637 -

*2: 8126 No.00151 -

*3: 8127 No.00181 -

*4: 5020 No.8031560 -

*5: Cannot be used for Ior measurement.

*6: Cannot be used for power measurement.

MODEL 8312

Power supply adapter



Power source can be taken from the measured line (100 to 240V)(Fuse : 8923)

MODEL 9132

Carrying case with magnet



Easy-to-use setting with magnet on the steel plate etc. of switch board

MODEL 8320

AC adapter (External power supply)



Appropriate for a longer period of recording. Complies to 90 to 264V(45 to 66Hz).

MODEL 9135

Carrying case



Dimension: 250(L) × 270(W) × 216(D)mm

MODEL 8329

Power supply adapter



Power source can be taken from the measured line (100 to 240V)(Fuse : 8923)

Ior Leakage current Clamp sensors

KEW **8177**

KEW **8178**

MAX 10A Ø40

MAX 10A Ø68



Voltage sensor

KEW **8309**



	8177	8178
Conductor size	φ40mm max.	φ68mm max.
Rated current	10A (rms) AC (14.1Apeak)	
Output voltage	500mV/10A AC	
Accuracy	±1.0%rdg±0.025mV (40 to 70Hz) ±4.0%rdg±0.025mV (30Hz to 5kHz, with inputs of 100mA or more)	
Phase shift	within 1.0° (45 to 70Hz while combining with KEW 5050, under the input of 10% or more of KEW 5050 leakage current range)	
Cable length : Output connector	Approx. 3m : MINI DIN 6PIN	
Operating temperature and humidity range	-10 to 50°C, relative humidity 85% or less (no condensation)	
Output impedance	Approx. 100Ω or less	Approx. 60Ω or less
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT III 300V Pollution degree 2, IEC 61326-1	
Dimension	128(L) × 81(W) × 36(D)mm	186(L) × 129(W) × 53(D)mm
Weight	Approx. 280g	Approx. 560g
Accessories	9095 (Carrying case) Instruction manual, Cable marker	9094 (Carrying case) Instruction manual, Cable marker
Applicable model	5050	

	8309
Max input voltage	600Vrms AC (sin), 848.4Vpeak
Input system	Differential input (can measure floating voltage)
Output voltage	0 to 60mV AC (output/input : 0.1mV/V)
Measuring ranges	6 to 600V
Accuracy	±1.0%rdg±0.1mV (50/60Hz)
Operating temperature and humidity range	-10 to 50°C, relative humidity 85% or less (no condensation)
Input impedance	Approx. 3.4MΩ
Output impedance	Approx. 180Ω
Cable length: Output connector	Approx. 2m : MINI DIN 6PIN
Applicable standards	IEC 61010-1 CAT III 600V Pollution degree 2 IEC 61010-031, IEC 61326 (EMC)
Dimension / Weight	87(L) × 26(W) × 17(D)mm (excluding protrusions) / Approx. 135g
Accessories	Instruction manual
Optional accessories	7185 (Extension cable)
Applicable model	5020

SENSORS

Load current flexible Clamp sensors

KEW 8135

MAX 50A Ø75



KEW 8130

MAX 1000A Ø110



KEW 8133

MAX 3000A Ø170



	8135	8130	8133
Conductor size	φ75mm max.	φ110mm max.	φ170mm max.
Rated current	5A AC (50A max.)	1000A AC	3000A AC
Output voltage	500mV/50A (10mV/A) AC	500mV/1000A (0.5mV/A) AC	500mV/3000A (0.167mV/A) AC
Accuracy	±1.0%rdg±0.5mV (45 to 65Hz) (0 to 50A) ±1.5%rdg±0.5mV (40 to 300Hz) (0 to 20A) ±1.5%rdg±0.5mV (300Hz to 1kHz) (0 to 5A)	±0.8%rdg±0.2mV (45 to 65Hz) ±1.5%rdg±0.4mV (40Hz to 1kHz)	±1.0%rdg±0.5mV (45 to 65Hz) ±1.5%rdg±0.5mV (40Hz to 1kHz)
Phase shift	within ±3.0° (45 to 65Hz),within ±4.0° (40Hz to 1kHz)		
Cable length : Output connector	Approx. 3m : MINI DIN 6PIN		
Operating temperature and humidity range	-10 to 50°C, relative humidity 85% or less (no condensation)		
Output impedance	100Ω or less		
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT IV 300V CAT III 600V Pollution degree 2, IEC 61326	IEC 61010-1, IEC 61010-2-030, IEC 61010-2-032 CAT IV 300V /CAT III 600V Pollution degree 2, IEC 61326	
Dimension	AMP box 65(L) × 24(W) × 22(D)mm(except for protrusions)		
Weight	Approx. 170 g	Approx. 180g	Approx. 200g
Accessories	Instruction manual Cable marker 9095(Carrying case)		
Applicable models	5020, 6305, 6315	5020, 5050(Cannot be used for lor measure- ment.), 6305, 6315	5050(Cannot be used for lor measurement.) 6305, 6315

Load current Clamp sensors

MODEL 8128

MAX 50A Ø24



MODEL 8127

MAX 100A Ø24



MODEL 8126

MAX 200A Ø40



MODEL 8125

MAX 500A Ø40



MODEL 8124

MAX 1000A Ø68



	8128	8127	8126	8125	8124
Conductor size	φ24mm max.	φ24mm max.	φ40mm max.	φ40mm max.	φ68mm max.
Rated current	5A AC (50A max.)	100A AC	200A AC	500A AC	1000A AC
Output voltage	50mV/5A [500mA/50A max.] (10mV/A) AC	500mV/100A (5mV/A) AC	500mV/200A (2.5mV/A) AC	500mV/500A (1mV/A) AC	500mV/1000A (0.5mV/A) AC
Accuracy	±0.5%rdg±0.1mV (50/60Hz) ±1.0%rdg±0.2mV (40Hz to 1kHz)				±0.5%rdg±0.2mV (50/60Hz) ±1.5%rdg±0.4mV (40Hz to 1kHz)
Phase shift	within ±2.0° (45 to 65Hz)		within ±1.0° (45 to 65Hz)		
Cable length : Output connector	Approx. 3m : MINI DIN 6PIN				
Operating temperature and humidity range	0 to 50°C, relative humidity 85% or less (no condensation)				
Output impedance	Approx. 20Ω	Approx. 10Ω	Approx. 5Ω	Approx. 2Ω	Approx. 1Ω
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT III 300V Pollution degree 2 IEC 61326		IEC 61010-1, IEC 61010-2-032 CAT III 600V Pollution degree 2 IEC 61326		
Dimension	100(L) × 60(W) × 26(D)mm		128(L) × 81(W) × 36(D)mm		186(L) × 129(W) × 53(D)mm
Weight	Approx. 160g		Approx. 260g		Approx. 510g
Accessories	9095 (Carrying case), Instruction manual, Cable marker				9094 (Carrying case) Instruction manual, cable marker
Optional accessories	7146 (Banana φ4 adjuster plug), 7185 (Extension cable)				
Applicable models	5020, 5050(Cannot be used for lor measurement.). 6305, 6315				

SENSORS

Leakage & Load current Clamp sensors

KEW 8146

MAX
30A Ø24
CE



KEW 8147

MAX
70A Ø40
CE



KEW 8148

MAX
100A Ø68
CE



	8146	8147	8148
Conductor size	φ24mm max.	φ40mm max.	φ68mm max.
Rated current	30A AC	70A AC	100A AC
Output voltage	1500mV/30A (50mV/A) AC	3500mV/70A (50mV/A) AC	5000mV/100A (50mV/A) AC
Accuracy	0 to 15A ±1.0%rdg±0.1mV (50/60Hz) ±2.0%rdg±0.2mV (40Hz to 1kHz) 15 to 30A ±5.0%rdg (50/60Hz), ±10.0%rdg (45Hz to 1kHz)	0 to 40A ±1.0%rdg±0.1mV (50/60Hz) ±2.0%rdg±0.2mV (40Hz to 1kHz) 40 to 70A ±5.0%rdg (50/60Hz), ±10.0%rdg (45Hz to 1kHz)	0 to 80A ±1.0%rdg±0.1mV (50/60Hz) ±2.0%rdg±0.2mV (40Hz to 1kHz) 80 to 100A ±5.0%rdg (50/60Hz), ±10.0%rdg (45Hz to 1kHz)
Cable length : Output connector	Approx. 2m : MINI DIN 6PIN		
Operating temperature and humidity range	0 to 50°C, relative humidity 85% or less (no condensation)		
Output impedance	Approx. 90Ω	Approx. 100Ω	Approx. 60Ω
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT III 300V Pollution degree 2, IEC 61326		
Dimension	100(L) × 60(W) × 26(D)mm	128(L) × 81(W) × 36(D)mm	186(L) × 129(W) × 53(D)mm
Weight	Approx. 150g	Approx. 240g	Approx. 510g
Accessories	9095(Carrying case), Instruction manual, Cable marker		9094 (Carrying case), Instruction manual, Cable marker
Optional accessories	7146(Banana φ4 adjuster plug), 7185(Extension cable)		
Applicable models	5020, 5050(Cannot be used for Ior measurement.), 6315(Cannot be used for power measurements.)		

Load current Clamp sensors

KEW 8121

MAX
100A Ø24
CE



KEW 8122

MAX
500A Ø40
CE



KEW 8123

MAX
1000A Ø55
CE



	8121	8122	8123
Conductor size	φ24mm max.	φ40mm max.	φ55mm max.
Rated current	100A AC	500A AC	1000A AC
Output voltage	500mV/100A (5mV/A) AC	500mV/500A (1mV/A) AC	500mV/1000A (0.5mV/A) AC
Accuracy	±2.0%rdg±0.3mV (50/60Hz), ±3.0%rdg±0.5mV (40Hz to 1kHz)		
Cable length : Output connector	Approx. 2m : MINI DIN 6PIN		
Operating temperature and humidity range	0 to 40°C, relative humidity 85% or less (no condensation)		
Output impedance	Approx. 9.5Ω	Approx. 1.9Ω	Approx. 1.5Ω
Applicable standards	IEC 61010-1, IEC 61010-2-032 CAT III 300V Pollution degree 2, IEC 61326		
Dimension	97(L) × 59(W) × 26(D)mm	128(L) × 81(W) × 36(D)mm	170(L) × 105(W) × 48(D)mm
Weight	Approx. 150g	Approx. 260g	Approx. 360g
Accessories	9095(Carrying case), Instruction manual, Cable marker		9094(Carrying case), Instruction manual, Cable marker
Optional accessories	7146(Banana φ4 adjuster plug), 7185(Extension cable)		
Applicable models	5020, 5050(Cannot be used for Ior measurement.)		

INTELLIGENT SOCKET TESTERS



INTELLIGENT SOCKET TESTERS

KEW 4506



- Easy measurement by simply plugging into a socket outlet and pressing the test button
- In only 1 second you can check voltage, correct wiring and polarity of Line, Neutral and Earth of a socket outlet
- KEW 4506 can be used on TT earth system, and also on TN-S by combined use with KEW 8343 (See measurement principle)
- Unique measurement method with low test current for avoiding tripping of RCDs



4506			
Socket test*1			
Measurable range of power supply voltage		80 to 290V rms (50/60Hz) *The tester gives voltage warning if 253V or higher voltage is detected but it can perform socket test.	
Socket type		3-Pole	2-Pole
Judgement	PASS	PASS	PASS
	FAIL	L-N Reverse	L-N Reverse
		L-E Reverse	Abnormal voltage
		N-E Reverse	-
		E Not connected	-
		N Not connected	-
		N-E unjudgeable	-
	Abnormal voltage	-	
AC V (L-N)			
Range		80 to 290V rms (50/60Hz)	
Accuracy		±2%rdg±4dgt	
Loop resistance (N-E)			
Range (Auto-ranging)		200Ω: 0.0 to 199.9Ω 2000Ω: 200 to 1999Ω	
Test current		200Ω: 5mA (5.3 Hz) 2000Ω: 1mA (5.3 Hz)	
Accuracy		±3%rdg±5dgt	
Applicable standards		IEC 61010-1, IEC 61010-2-030 CAT II 300V Pollution degree 2, IEC 60529(IP40)	
Operating temperature & humidity range		-10 to 50°C, relative humidity 85% or less (no condensation)	
Storage temperature & humidity range		-20 to 60°C, relative humidity 85% or less (no condensation)	
Power source		LR6 (AA)(1.5V) × 2	
Dimension		212(L) × 56(W) × 39(D) mm	
Weight		Approx. 250g (including batteries)	
Accessories		KAMP 10 or 7284(Test lead with IEC connector) 9161 (Carrying case) Batteries, Instruction manual	
Optional accessories		8343(Signal Source for Intelligent Socket Tester)	

*1 If N-E resistance measurement function is turned off*2, test is performed with a test voltage applied from an optional signal source only: current flows between N-E is less than 1μA.

*2 If the function is disabled, KEW 4506 doesn't show resistance between N-E.

Accessories



KAMP10 or MODEL 7284
1,500mm 720mm
Test lead with IEC connector

Applicable to the socket outlet types of each country



KAMP 10(AU) : Australian plug
KAMP 10(EU) : European SCHUKO plug
KAMP 10(UK) : British plug (13A)
7284 : American(NEMA)plug



MODEL 9161
Carrying case

KEW 8343

SIGNAL SOURCE FOR INTELLIGENT SOCKET TESTER



8343		
Conductor size	φ24mm max.	
Test voltage	Freq.	Approx. 1.8kHz
	TRMS	Approx. 20mV rms
Allowable input range	300V AC rms (50/60Hz) continuous 100A AC (50/60Hz) continuous	
Operating temperature & humidity range	-10 to 50°C, relative humidity 85% or less (no condensation)	
Storage temperature & humidity range	-20 to 60°C, relative humidity 85% or less (no condensation)	
Power source	LR6 (AA)(1.5V) × 6	
Applicable standards	IEC 61010-1, IEC 61010-031, IEC 61010-2-032 CAT III 300V Pollution degree 2, IEC 60529(IP40)	
Dimension	Unit: 112(L) × 61(W) × 42(D) mm Test voltage injection clamp: 100(L) × 60(W) × 26(D) mm Cable length: Approx. 1.5m	
Weight	Approx. 520g (including batteries)	
Accessories	7157B (Alligator clips) 9096 (Carrying case) Batteries, Instruction manual	

Accessories



MODEL 7157B
Alligator clips



MODEL 9096
Carrying case


Where to use

KEW 4506 can test the wiring connection including the N-E Reverse of single-phase socket outlets. This tester can test single phase socket outlets wired to Three-phase 4-Wire, Single-phase 3-Wire, Single-phase 2-Wire supply systems.


*KEW 4506 cannot be used for checking three-phase socket outlets and testing the RCD.

For use in a general TN system circuit, N-E Reverse can be determined only at socket outlets connected downstream of the N conductor where KEW 8343 is clamped.

For TT system

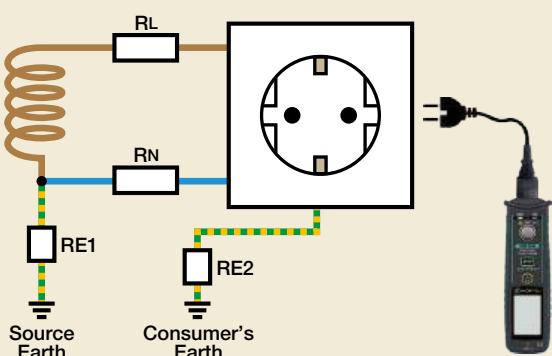

For TN system

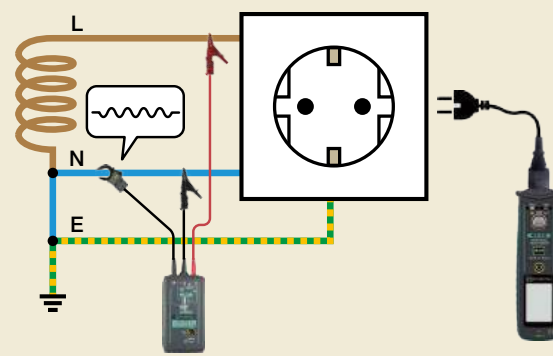

All test results and PASS/FAIL in a clear display screen




Easy measurement by simply plugging into a socket outlet and pressing the test button.




LCD backlight automatically turns on at the dark place.

*It is possible to disable backlight


Wiring check with the live circuit condition




L-N voltage and N-E resistance at TT system can be displayed.



KEW 4506 has a mode which can detect the wiring connection avoiding any RCD tripping.
*resistance measurement OFF



Non-connect can be also displayed.



Wiring check for 2P(no earth) outlet is also available by selecting the 2P setting.
*2P conversion adapter which is required to connect with 2P outlet isn't supplied.

KEW 5204/5204BT

DIGITAL LIGHT METER



- DATA HOLD
- 5204BT
- MAX/MIN
- Bluetooth
- AUTO POWER OFF

photo : 5204BT



- Detachable & Rotatable Light Sensor
- Data Hold Function
- MAX/MIN Function
- Large LCD with Backlight
- LED illuminance can be measured

((KEW))
CONNECT Wireless communication with smart-
phone or tablet (5204BT only)



	5204/5204BT
Measuring range	0.0 to 199900 lx
Ranges	199.9/1999/19990/199900 lx
Accuracy	±4%rdg±5dgt (23±2°C)
Angle deviation from cosine characteristics	10° ±1.5%, 30° ±3%, 60° ±10%, 80° ±30%
Relative spectral sensitivity characteristics	Deviation from spectral luminous efficiency:9%
Response time	Auto-ranging:5s or less Manual ranging:2s or less
Operating temperature and humidity range	0 to 40°C, 80% RH or less (no condensation)
Storage temperature and humidity range	-10 to 60°C, 70% RH or less (no condensation)
Communication interface	Bluetooth®5.0*1
Applicable standards	IEC 61326 , JIS C 1609-1:2006
Power source	LR/R6(AA)(1.5V) × 2
Dimension	169(L) × 63(W) × 37(D)mm
Weight	210g
Accessories	9195(Carrying case), Batteries, Instruction Manual

*1 5204BT only.

Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

*LED illuminance measurements are verified by testing only the typical illuminance, frequency, and duty ratio of pulsed white LED.

KEW Smart Advanced application streamlines report creation.

Download and install our special application "KEW Smart Advanced" in your smartphone or tablet device for logging the measured values. Measured values can be saved in your smartphone or tablet device in csv format: the data is editable in excel format.



MODEL 5202

DIGITAL LIGHT METER

- DATA HOLD

- 3 ranges changeable from low to high illuminance (200/2000/20000Lux)
- Data hold function
- Digital light meter with separate light receiving sensor and meter



	5202
Ranges	0.1 to 19990Lux
Accuracy (23°C±5°C)	Lux Accuracy
	200 ±4%rdg±5dgt
	2000 ±4%rdg±5dgt
	20000 ±5%rdg±4dgt
Current consumption	Approx. 2mA
Response time	2.5 times / sec.
Operating temperature and humidity range	0 to 50°C, relative humidity 80% or less (no condensation)
Storage temperature and humidity range	-10 to 60°C, relative humidity 70% or less (no condensation)
Angular incident light characteristics	30°less than ±3% 60°less than ±10% 80°less than ±30%
Power source	6F22(9V) × 1
Dimension	Meter:148(L) × 71(W) × 36(D)mm Light receiving sensor:80(L) × 67(W) × 32(D)mm
Weight	Approx. 270g
Accessories	Carrying case Battery Photocell cover Instruction manual

KEW 5711

Voltage Detector

- CAT IV 600V

- Senses AC voltage through insulation
- Buzzer sounds and tip glows upon AC voltage detection
- Powerful flashlight
- Dual range (Hi/Lo) sensitivity
- Ready to use without power-on
- Designed to meet IEC 61010-1



	5711
Operating voltage	90 to 1000V AC (Lo sensitivity) 20 to 1000V AC (Hi sensitivity)
Frequency range	50/60Hz
Operating temperature range	-10 to 50°C
Storage temperature range	-20 to 60°C
Applicable standards	IEC 61010-1 CAT IV 600V / CAT III 1000V Pollution degree 2
Power source	LR03 / R03(AAA)(1.5V) × 2
Dimension	153(L) × φ20mm
Weight	Approx. 40g (including batteries)
Accessories	Batteries, Instruction manual

LED light



Bright Red Indicator



KEW 8035

Non-Contact Safety Phase Indicator

CAT IV 600V

CE



- New technology permits safe testing, without the need of direct contact between probes and live wires
- The insulated alligator clips can clip insulated cables from $\phi 2.4$ to 30mm
- Phase rotation is indicated by the rotary illumination of LEDs and logical audible tones
- A magnet on the backside of the instrument can fix the instrument onto the distribution board
- Wide measuring range for 3 phase installations from 70 to 1000V AC
- Super brightness function permits clear LEDs indication also in sunshine

	8035
Functions	Phase rotation (Clockwise or Counter Clockwise), Presence of open phase
Detection method	Electrostatic induction
Measuring voltage range	From 70 to 1000V AC phase to phase (sine wave, continuous input)
Clamp diameter range	From $\phi 2.4$ to 30mm insulated cables
Measuring frequency range	45 to 66Hz
Phase rotation	Clockwise: Green arrow LEDs "rotate" in clockwise, Green symbol "CW" lits, Intermittent buzzer Counter Clockwise: Red arrow LEDs "rotate" in counter clockwise, Red symbol "CCW" lits, continuous buzzer
Visual indication	LEDs with Super brightness function
Battery voltage warning	Power LED blinks if battery voltage is too low.
Operating temperature and humidity range	-10 to 50°C, relative humidity 80% or less (no condensation)
Storage temperature and humidity range	-20 to 60°C, relative humidity 80% or less (no condensation)
Applicable standards	IEC 61010-1 CAT IV 600V / CAT III 1000V Pollution degree2
Power source	LR6(AA)(1.5V) \times 4 * Continuous use: Approx. 100 hours (Auto power off in about 10 min.)
Dimension	112(L) \times 61(W) \times 36(D) mm
Weight	Approx. 380g
Test leads	Double insulated cables, length Approx. 70cm
Colours leads	L1(U): Red L2(V): White L3(W): Blue
Accessories	9096 (Carrying case), Batteries, Instruction manual

KEW 8031/8031F

PHASE INDICATOR with open phase checker

PHASE INDICATOR with fused test leads

CE



photo : 8031F

KEW 8031 CE type

KEW 8031 Standard type

	8031	8031F
	Standard Type	CE Type
Operational voltage	110 to 600V AC	
Fuse	—	0.5A/600V (F)
Time limit for continuous	>500V : within 5 minutes	
Frequency response	50/60Hz	
Applicable standards	—	IEC 61010-1 CAT IV 300V, CAT III 600V Pollution degree 2
Dimension	106(L) \times 75(W) \times 40(D)mm	
Weight	Approx. 350g(Main unit only)	
Cord	1.5m(R : red S : white T : blue)	1.3m(R:red S:white T:blue)
Accessories	9029(Carrying case) Instruction manual	8923(Fuse [0.5A/600V]) 9094(Carrying case) Instruction manual

- Phase indicator designed to check the presence of open phase and also the phase sequence by rotating disk and lamps
- Can check a wide range of 3-phase power source from 110 to 600V Sealed against dust, the unit ensures trouble-free performance
- Small, Lightweight and portable. Designed for maximum ease of operation and ruggedness
- No exposed metal parts, Safety features are incorporated including the instant push button switch operation (8031F only)

KEW 5515

Infrared Thermometer



CE



- Single laser allows more accurate measurements
- Backlight display helps to read in a dark place
- Dual display: Main display shows the measured values and Sub display shows either of max, min, average or thermocouple value
- Alarm function: The upper and lower temperature limits can be set
- The red blinking Backlight indicates that the measured value is below or over the pre-set limits

	5515
Measuring range	-32 to 535°C
Accuracy	$\pm 3.0^\circ\text{C}$ (-32 to -20 °C), $\pm 2.0^\circ\text{C}$ (-20 to +100°C), $\pm 2\%\text{rdg}$ (100 to 535°C)
Infrared spectral band	5 to 14 μm
Measuring diameter	1000mm/ $\phi 78\text{mm}$ (Distance/ Measuring dia.: 12:1)
Repeatability	Within $\pm 1^\circ\text{C}$
Emissivity	Variable between 0.10 and 1.00 (by 0.01 steps), Before shipment: 0.95
Collimation	Laser beam (630 to 670nm 1mW or less) specifies the center.
Thermocouple	K-type*
Measuring range of thermocouple	-199 to 1372°C
Accuracy of thermocouple	$\pm 1.5\%\text{rdg} + 1^\circ\text{C}$ (-40 to 1372°C)
Response	500ms
Resolution	0.1°C
Auto power off	If no key is pressed for 6 seconds, the power is shut off automatically.
LCD display	LCD with backlight (blinks in red when alarm function is activated)
Dual display	Simultaneous display (Measured value and either of max, min, average or thermocouple value)
Operating temperature & humidity	0 to 50°C/ 10 to 90% RH
Applicable standards	IEC 61326, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-8
Power source	6F22(9V) \times 1
Dimension	180(L) \times 130(W) \times 40(D)mm
Weight	Approx. 195g (excluding battery)
Accessories	9152(Carrying case), Battery, Instruction manual

*Commercial K-type thermocouple can be used with the product.

KT 200

AC CLAMP METER

Ø30 MAX 400A AC A DC AC V Ω ●●●
DATA HOLD AUTO POWER SAVE

- Small and handy clamp meter
- IEC 61010-1 Safety standard CAT III 300V / CAT II 600V
- 400A AC Clamp meter
- DMM function ACV, DCV, Ω Continuity Buzzer



	KT 200
AC A	40.00/400.0A ±2.0%rdg±6dgt(50/60Hz)
AC V	400.0/600V(Auto-ranging) ±2.0%rdg±5dgt(50/60Hz)
DC V	400.0/600V(Auto-ranging) ±1.5%rdg±5dgt
Ω	400.0/4000Ω(Auto-ranging) ±2.0%rdg±5dgt
Continuity buzzer	Buzzer sounds below 50±35Ω
Conductor size	φ30mm max.
Applicable standards	IEC 61010-1 CAT III 300V(ACA) / CAT II 600V Pollution degree 2 IEC 61010-2-032, IEC 61326-1
Power source	R03(1.5V)(AAA) × 2 *Continuous measuring time: Approx. 200 hours(Auto power save: Approx. 10 min.)
Dimension	184(L) × 44(W) × 27(D)mm
Weight	Approx. 190g(including batteries)
Accessories	7066A(Test leads), Batteries, Instruction manual
Optional accessories	9105(Carrying case)

KT 203

AC/DC CLAMP METER

Ø30 MAX 400A DC AC A DC AC V Ω ●●●
DATA HOLD AUTO POWER SAVE

- Small and handy clamp meter
- IEC 61010-1 Safety standard CAT III 300V / CAT II 600V
- 400A AC/DC Clamp meter
- DMM function ACV, DCV, Ω Continuity Buzzer



	KT 203
AC A	40.00/400.0A (Auto-ranging) ±3.0%rdg±8dgt[50/60Hz](0 to 40.00A) ±3.5%rdg±6dgt[50/60Hz](15.0 to 299.9A) ±4.0%rdg±6dgt[50/60Hz](300.0 to 400.0A)
DC A	40.00/400.0A (Auto-ranging) ±3.0%rdg±8dgt (0 to 40.00A) ±3.5%rdg±6dgt (15.0 to 299.9A) ±4.0%rdg±6dgt (300.0 to 400.0A)
AC V	400.0/600V(Auto-ranging) ±2.0%rdg±5dgt(50/60Hz)
DC V	400.0/600V(Auto-ranging) ±1.5%rdg±5dgt
Ω	400.0/4000Ω(Auto-ranging) ±2.0%rdg±5dgt
Continuity buzzer	Buzzer sounds below 50±35Ω
Conductor size	φ30mm max.
Applicable standards	IEC 61010-1 CAT III 300V(ACA) / CAT II 600V Pollution degree 2 IEC 61010-2-032, IEC 61326-1
Power source	R03(1.5V)(AAA) × 2 *Continuous measuring time: Approx. 35 hours(Auto power save: Approx. 10 min.)
Dimension	187(L) × 68.5(W) × 38.5(D)mm
Weight	Approx. 200g(including batteries)
Accessories	7066A(Test leads), Batteries, Instruction manual
Optional accessories	9105(Carrying case)

KT 170/171

VOLTAGE TESTERS



photo : KT170

photo : KT171

Probe Protection Cover



CE

CE

- Comply with the latest standards IEC 61243 and IEC 61010
- Novel design
Large and bright LEDs: Values are visible in the dark place
Ergonomic design fits in the hand
- Two functions are available in one model
"Measurement without battery" and "Self Test (all LED on)"
- Test leads withstand harsh environments at low temperature
- Penlight(white LED)
- Auto power ON/OFF
- Audible indication
- Variable test tips, $\phi 2\text{mm}$ or $\phi 4\text{mm}$
- Probe protection cover can store the attachment of caps
- IP65 (IEC 60529)

Voltage Test (Double-pole Test)

- The voltage is indicated by LEDs.
- Buzzer sounds and Live circuit LED lights up when a threshold voltage of 50V is exceeded.
- Voltage polarity is indicated in following manner.

AC +DC -DC



Bright LEDs and Penlight




Single-pole Phase Test




	KT170/171
Voltage test	
Voltage range	12 to 690V AC/DC
LED	
Nominal voltage	12/24/50/120/230/400/690V AC(16 to 400Hz), DC(\pm)
Tolerance (Threshold voltage)	Light on at more than: 7 \pm 3V (12V LED) 18 \pm 3V (24V LED) 37.5 \pm 4V (50V LED) 75% \pm 5% of nominal voltage (120/230/400/690V LED)
Response time	< 0.6s at 100% of each nominal voltage
LCD (KT171 only)	
Range / Resolution (Auto-range)	300V (6.0 to 299.9) /0.1V AC/DC 690V (270 to 759) /1V AC 690V (270 to 710) /1V DC
Accuracy (23 \pm 5 $^{\circ}$ C)	\pm 1.5V (7 to 100V) \pm 1% \pm 5dgt (100 to 690V) AC(16 to 400Hz), DC(\pm)
Over limit indication	"OL"
Response time	Approx. 1s at 90 to 110% of each voltage
Peak current	Is<3.5mA (at 690V)
Measurement Duty	30s ON (operation time) 240s OFF (recovery time)
Single-pole phase test	
Voltage range	100 to 690V AC (50/60Hz)
Phase rotation test	
System	Three-phase 4-wire system 200 to 690V phase-to-phase AC (50/60Hz)
Phase range	120 \pm 5 degree
Continuity test	
Detection range	0 to 400k Ω + 50%
Test current	Approx. 1.5 μ A (battery 3V, 0 Ω)
Operating temperature and humidity range	-15 to 55 $^{\circ}$ C, relative humidity 85% or less (no condensation)
Storage temperature and humidity range	-20 to 70 $^{\circ}$ C, relative humidity 85% or less (no condensation)(KT170) -20 to 60 $^{\circ}$ C, relative humidity 85% or less (no condensation)(KT171)
Applicable standards	IEC 61243-3, IEC 61010-1, IEC 61557-7 CAT IV 600V / CAT III 690V Pollution degree 2, IEC 60529 (IP65)
Power source	LR03(AAA) (1.5V) \times 2
Dimension	246(L) \times 64(W) \times 26(D)mm
Weight	Approx. 190g (including batteries)
Accessories	Batteries, KTA01(4mm metal tips[2pcs/set]) KTA02(4mm rubber caps[2pcs/set]), Instruction manual

KT170AU is available for Australia and New Zealand market.

Variable top tips



Store the attachment of caps

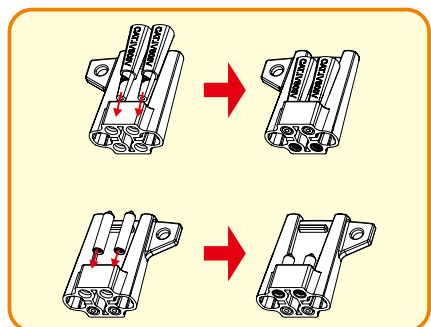

ACCESSORIES

7025

1,500mm

Test leads

Applicable model

3165
3166



Plug $\phi 4$

7066A

1,100mm

Test leads

Applicable model

1009 2046R
1011 2055
1012 2056R
1020R 2117R
1021R 2127R
1109S KT200
1110 KT203
2007R



Plug $\phi 4$

7073

2,120mm

2WAY Output cord

Applicable model

2413F
2413R



Plug $\phi 4$

7082

1,100mm

Leads for recorder

Applicable model

3124A



Plug $\phi 4$

7083

5,200mm

Leads for battery charging

Applicable model

3124A



7084

5,000mm

Earth and guard leads

Applicable model

3124A



Plug $\phi 4$

7095A

Earth resistance test leads

Applicable model

4102A
4102A-H
4105A
4105A-H



Green: 5m
Yellow: 10m
Red: 20m



Plug $\phi 4$

7107A

1,100mm

Test leads

Applicable model

2002PA
2002R
2003A
2009R
2200
2200R



Plug $\phi 4$

7121B

1,500mm

Distribution board test leads

Applicable model

4118A
5406A



Plug

7122B/7217A

1,220mm

Test leads

Applicable model

7122B

3005A 3132A
3007A 6010B
3131A 6011A

7217A

3132A



7217A :
For Australia



Plug $\phi 4$

photo : 7122B

7127B

1,570mm

Simplified measurement probe

Applicable model

4102A 4105A
4102A-H 4105A-H
4105DL
4105DL-H
4105DLBT
4105DLBT-H



Plug $\phi 4$

7123/7124/7125/7126

1,500mm

Molded plug test lead

Applicable model

4118A
5406A



Plug

7123 : (AU) Australian plug
7124 : (UK) British plug (13A)

7125 : (EU) European SCHUKO plug
7126 : (SA) South african plug

photo : 7123

7128A

1,390mm

Test leads

Applicable model

5410



Plug $\phi 4$

ACCESSORIES

7129A 1,450mm

Test lead with alligator clip

Applicable model

5410
6205



Plug $\phi 4$

7132A (KSLP5) 1,200mm

External earth probe

Applicable model

6011A



Plug $\phi 4$

7133B (OMA DIEC) 1,500mm

Distribution board test leads

Applicable model

6010B
6011A



7139A

Line 1,000mm Earth 1,550mm

Test leads with remote control switch

Applicable model

7149A



Plug

7141B 3,000mm

Voltage test lead set

Applicable model

6305
6315



Plug $\phi 4$

7146 190mm

Banana $\phi 4$ adjuster plug

Applicable model

8121 8127
8122 8128
8123 8146
8124 8147
8125 8148
8126



Plug $\phi 4$

7148

2,000mm

USB cable

Applicable model

5020
6305



7149A

Test leads with remote control switch set

Line 1,000mm Earth 1,550mm

Applicable model

3161A

Consists of:
7139A (Test leads with remote control switch)
7161A (Flat test prod (black))
7131B (Safety alligator clip (black))
8017 (Extension prod long)
9041 (Cord case)



Plug

7153B 1,220mm

Safety test leads

Applicable model

1009 2046R
1011 2055
1012 2056R
1021R 2117R
1110 2127R
2007R



Plug $\phi 4$

7154B 1,220mm

Safety test leads

Applicable model

1009 2117R
1011 2127R
1012 3165
1021R 3166
1110 6010B
2007R 6011A
2046R
2055
2056R



Plug $\phi 4$

7155B

Safety alligator clips with fuse

Applicable model

7153B
7154B



7156B 1,220mm

Safety test leads with fuse

Applicable model

1009 2117R
1011 2127R
1012 3165
1021R 3166
1110 6010B
2007R 6011A
2046R
2055
2056R



Plug $\phi 4$

7157B/7158B

Safety alligator clips / Safety alligator clips for fuse

Applicable model

7153B 7154B
8343

Applicable model

7155B 7156B



photo : 7157B



photo : 7158B

7159B 1,220mm

Safety test leads with fuse

Applicable model

1009 2117R
1011 2127R
1012 3165
1021R 3166
1110 6010B
2007R 6011A
2046R
2055
2056R



Plug $\phi 4$

ACCESSORIES

7165A 3,000mm

Line probe



Applicable model

3025B
3121B
3122B
3123A
3125B
3127

7168A 3,000mm

Line probe with alligator clip



Applicable model

3025B
3121B
3122B
3123A
3125B
3127

7170/7240 2,000mm

Power cord



Applicable model

3128
6305
6315

7170

7240



Plug

photo : 7170

7170 : EU plug 7240 : UK plug

7185 3,000mm

Extension cable



Applicable model

5020 8128
8121 8146
8122 8147
8123 8148
8124 8309
8125
8126
8127

7187A/7218A/7221A/7222A 1,230mm

Mains test lead



photo : 7218A



Plug $\phi 4$



Applicable model

4140
6516
6516BT

7187A : UK plug
7218A : EU plug
7221A : SA plug
7222A : AU plug

7196B 1,550mm

Test leads with remote control switch



Applicable model

6024PV

7219 1,950mm

USB cable



Applicable model

5050
6205
6315

7220A 1,080mm

Test leads



Applicable model

1051
1052
1061
1062



Plug $\phi 4$

7224A 1,500mm

Earth cord



Applicable model

3123A
3127
3128

7225A 1,500mm

Guard cord



Applicable model

3123A
3127
3128

7226A 3,000mm

Line probe



Applicable model

3128

7227A 3,000mm

Line probe with alligator clip



Applicable model

3128

7228A

Earth resistance test leads



Applicable model

6514BT 6516BT
6516
Green : 5m
Yellow : 10m
Red : 20m



Plug $\phi 4$

7229A

Earth resistance test leads



Applicable model

4106
Green : 20m
Yellow : 20m
Black : 20m
Red : 40m



Plug $\phi 4$

ACCESSORIES

7234 1,080mm

Alligator clip



Applicable model

1009 1051
1011 1052
1012 1061
1020R 1062
1021R



Plug $\phi 4$

7238A 1,570mm

Simplified measurement test leads



Applicable model

4106



Plug $\phi 4$

7243A 1,650mm

L-shaped probe



Applicable model

3431
3551
3552
3552BT
6024PV

7244A 1,400mm

Alligator clip



Applicable model

6024PV



Plug $\phi 4$

7245A

Precision measurement cord set



Applicable model

4102A
4102A-H
4105A
4105A-H
6024PV

Consists of :
7228A(Earth resistance test leads)
8032(Auxiliary earth spikes[2spikes/set])
8200-03(Cord reels[3pcs])
9142(Carrying case)

Green : 5m
Yellow : 10m
Red : 20m

7246 1,400mm

Distribution board test lead



Applicable model

4140
6516
6516BT



Plug $\phi 4$

7247 1,400mm

Distribution board test lead



Applicable model

4140
6514BT



Plug $\phi 4$

7248 2,000mm

Test lead with Alligator clip and Flat test probe



Applicable model

4300
6205



Plug $\phi 4$

7253/7254 15m

Longer line probe with alligator clip



Applicable model

7253

3121B 3025B
3122B 3125B
3123A 3127

7254

3128

photo : 7253

7256 1,200mm

Output cord



Applicable model

2002PA 2010
2002R 2500
2003A 2510
2009R



Plug $\phi 4$

7260 1,400mm

Test lead with remote control switch



Applicable model

3431
3551
3552
3552BT

7261A 2,000mm

Test lead with Alligator clip



Applicable model

3431
3551
3552
3552BT



Plug $\phi 4$

7264 3,000mm

Earth cord



Applicable model

3025B
3121B
3122B
3125B

7265 3,000mm

Guard cord



Applicable model

3025B
3121B
3122B
3125B

7266

Earth resistance test leads



Applicable model

4105DL
4105DL-H
4105DLBT
4105DLBT-H
Green: 5m
Yellow: 10m
Red: 20m



Plug $\phi 4$

ACCESSORIES

7267/7268

Cable reel for Earth resistance tester

Applicable model

4105DL 4105DLBT-H
4105DL-H 6516
4105DLBT 6516BT



7267

Red: 20m

7268

Yellow: 10m

7269 20m

Earth resistance test lead (Red)

Applicable model

4105DL
4105DL-H
4105DLBT
4105DLBT-H



Plug $\phi 4$

7270 10m

Earth resistance test lead (Yellow)

Applicable model

4105DL
4105DL-H
4105DLBT
4105DLBT-H



Plug $\phi 4$

7271 5m

Earth resistance test lead (Green)

Applicable model

4105DL 4105DLBT-H
4105DL-H 6516
4105DLBT 6516BT



Plug $\phi 4$

7272

Precision measurement cord set

Applicable model

4105DL 6514BT
4105DL-H 6516
4105DLBT 6516BT
4105DLBT-H



Consists of :
7267(Cable reel for Earth resistance tester (Red))
7268(Cable reel for Earth resistance tester (Yellow))
7271(Earth resistance test lead (Green))
8041(Auxiliary earth spikes(2spikes/1set))
9192(Carrying case for cord reels)

Green: 5m
Yellow: 10m
Red: 20m

7273 3,000mm

Voltage test lead

Applicable model

5050



Plug $\phi 4$

7275 2,000mm

Printer cable

Applicable model

6205



7276 400mm

Adapter for Extension cord

Applicable model

6205



7277 1,440mm

Mains lead

Applicable model

6205



7278 1,500mm

Earth cable

Applicable model

5050



7281 1,400mm

Test leads with remote control switch

Applicable model

6514BT
6516
6516BT



7284 720mm

Test Lead with IEC connector

Applicable model

4506



American (NEMA) plug

7290 1,500mm

Voltage test lead set

Applicable model


2060BT
2062
2062BT



Plug $\phi 4$

KAMP10 1,500mm

Test lead with IEC connector



Plug

Applicable model

4506
6010B
6011A

AU : Australian plug
UK : British plug (13A)
EU : European SCHUKO plug
SA : South african plug

*SA plug is not included in the accessories of KEW 4506.

ACCESSORIES

8216 1,000mm

Temperature probe



Applicable model

1011
2046R
2056R

• -50 to 300°C

8405 1,400mm

Temperature probe



Applicable model

1051 1061
1052 1062

• -40 to 500°C, Surface type,
Point material: Ceramic



Plug $\phi 4$

8406 1,380mm

Temperature probe



Applicable model

1051 1061
1052 1062

• -40 to 500°C, Surface type



Plug $\phi 4$

8407 1,540mm

Temperature probe



Applicable model

1051 1061
1052 1062

• -40 to 700°C, Liquid,
Semi-solid



Plug $\phi 4$

8408 1,540mm

Temperature probe



Applicable model

1051 1061
1052 1062

• -40 to 600°C, Air, Gas



Plug $\phi 4$

8901

Fuse [0.5A/250V]



Applicable model

1109S

8918

Fuse [0.8A/600V]



Applicable model

1011
1012

8919

Fuse [10A/600V]



Applicable model

1009
1011
1012
1021R
7133B
7155B
7156B
7159B

8923

Fuse [0.5A/600V]



Applicable model

1009 6010B
1110 6011A
3005A 6514BT
3007A 6516
3131A 6516BT
3132A 8031F
4106 8312
8329

8926

Fuse [440mA/1000V]



Applicable model

1051
1052
1061
1062

8927

Fuse [10A/1000V]



Applicable model

1051
1052
1061
1062

8928

Fuse [10A/250V]



Applicable model

6205

8930

Fuse [10A/250V]



Applicable model

8602

9029 180(L)×185(W)mm

Carrying case



Applicable model

8031

9041 210(L)×110(W)mm

Cord case



Applicable model

3161A

ACCESSORIES

9074 190(L)×105(W)mm

Cord case



Applicable model

3005A
3007A
3131A
3132A
3165
3166

9079 220(L)×105(W)×50(D)mm

Carrying case



Applicable model

2007R
2117R
2127R

9084 230(L)×120(W)×149(D)mm

Soft case



Applicable model

4102A
4102A-H
4105A
4105A-H
6514BT
6516
6516BT

9090 168 (L) × 90 (W) mm

Carrying case



Applicable model

2031
2033
2431

9092 200(L)×105(W)×65(D)mm

Cord case



Applicable model

6010B
6011A

9094 250(L)×115(W)×50(D)mm

Carrying case



Applicable model

2002PA 2002R
2003A 2009R
2046R 2055
2056R 2413F
2413R 8124
8123 8148
8178 8031F

9095 162(L)×134(W)×45(D)mm

Carrying case



Applicable model

1009 1011
1012 2010
8112 8115
8121 8122
8125 8126
8127 8128
8130 8133
8135 8146
8147 8177

9096 180(L)×145(W)×78(D)mm

Carrying case



Applicable model

2500
2510
8035
8343

9097 200(L)×110(W)×45(D)mm

Carrying case



Applicable model

1021R
2432
2433
2433R
2434

9103 154(L)×141(W)×60.6(D)mm

Carrying case



Applicable model

1110

9105 190(L)×91(W)×30(D)mm

Carrying case



Applicable model

KT200
KT203

9107 160(L)×103(W)×28(D)mm

Soft case



Applicable model

2000A
2001A
2012RA

9113 168(L)×55(W)×31(D)mm

Carrying case



Applicable model

2300R

9118 125(L)×75(W)×53(D)mm

Carrying case



Applicable model

5020

9125 250(L)×450(W)×210(D)mm

Carrying case



Applicable model

4106
5050
6305
6315

ACCESSORIES

9130 200(L)×57(W)×25(D)mm
Carrying case



Applicable model
1030

9132 188(L)×136(W)×77(D)mm
Carrying case with magnet



Applicable model
6305
6315

9135 250(L)×270(W)×216(D)mm
Carrying case



Applicable model
5020
6305
6315

9142 250(L)×270(W)×216(D)mm
Carrying case



Applicable model
6514BT
6516
6516BT
7245A

9147 180(L)×120(W)×70(D)mm
Cord case



Applicable model
4118A
5406A
5410

9152 200(L)×100(W)×50(D)mm
Carrying case



Applicable model
5515

9154 205(L)×140(W)×72(D)mm
Carrying case



Applicable model
1051
1052
1061
1062

9156A 230(L)×217(W)×86(D)mm
Soft case with shoulder strap



Applicable model
4140
6024PV

9158 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
3123A

9160 200(L)×85(W)×35(D)mm
Carrying case



Applicable model
2200
2200R

9161 250(L)×115(W)×50(D)mm
Carrying case



Applicable model
4300
4506

9164 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
4102A
4102A-H

9165 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
4105A
4105A-H

9166 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
4200

9167 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
4202

ACCESSORIES

9168 165(L)×160(W)×40(D)mm
Carrying case

Applicable model
11095



9171 380(L)×430(W)×154(D)mm
Carrying case [Hard]

Applicable model
3127



9173 132(L)×193(W)×95(D)mm
Carrying case

Applicable model
3431
3551
3552
3552BT



9174 206(L)×164(W)×68(D)mm
Carrying case

Applicable model
2204R
2210R



9176 300(L)×315(W)×125(D)mm
Carrying case [Hard]

Applicable model
3124A



9182 300(L)×315(W)×125(D)mm
Carrying case [Hard]

Applicable model
3121B



9183 300(L)×315(W)×125(D)mm
Carrying case [Hard]

Applicable model
3122B



9186A 113(L)×170(W)×65(D)mm
Carrying case

Applicable model
3431
3551
3552
3552BT



9187 250(L)×90(W)×60(D)mm
Carrying case

Applicable model
3431
3551
3552
3552BT



9188 126(L)×85(W)×18(D)mm
Hard case

Applicable model
1019R



9190 240(L)×260(W)×250(D)mm
Carrying case

Applicable model
4105DL
4105DL-H
4105DLBT
4105DLBT-H



9191 300(L)×315(W)×125(D)mm
Carrying case [Hard]

Applicable model
4105DL
4105DL-H



9192 250(L)×270(W)×216(D)mm
Carrying case for cord reels

Applicable model
7272



9193 274(L)×122(W)×122(D)mm
Carrying case

Applicable model
6205



9195 200(L)×150(W)×55(D)mm
Carrying case

Applicable model
5204
5204BT



ACCESSORIES

9197 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
4105DLBT
4105DLBT-H

9198 326(L)×133(W)×89(D)mm
Carrying case



Applicable model
2060BT
2062
2062BT

9202 260(L)×350(W)×100(D)mm
Carrying case



Applicable model
8601
8602

9203 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
3025B

9204 300(L)×315(W)×125(D)mm
Carrying case [Hard]



Applicable model
3125B



Scan QR code and get more info about Accessory.

Accuracy

The accuracy of a digital tester is defined as the difference between the reading and the true value for a quantity measured in reference conditions. Accuracy is specified in the format: ($\pm xx\%$ rdg $\pm xx$ dgt)

The first portion identifies a percentage error relative to the reading, which means it is proportional to the input. The second portion is an error, in digits, that is constant regardless of the input.

"Rdg" is for reading and "dgt" is for digits. Dgt indicates the counts on the last significant digit of the digital display and is typically used to represent an error factor of a digital tester.

Auto-discharge Function

A function used immediately after an insulation test to automatically release charges stored within the circuit under test during measurement.

Voltage remaining in the circuit under test can be monitored during auto-discharging process on the display.

Auto-ranging

A function of a tester to automatically select the appropriate measuring range based on the input signal.

Average Value

The average of an AC waveform's instantaneous values taken over a half cycle. Ordinary testers respond to the average value.

For sinusoidal wave :

Average value = Maximum value $\times 2/\pi$ = Maximum value $\times 0.637$

When the True RMS value is 100V ;

Average value = Maximum value $\times 2/\pi$ = $141 \times 0.637 = 90(V)$

The reading of ordinary testers is calibrated in terms of the effective value of a sinusoidal wave even though they are responding to the average value. They are called average-responding-RMS-calibrated type of testers. As opposed to these, True RMS type testers respond and show the True RMS value.

Crest Factor

The ratio of the maximum value to the effective value.

It represents the range of input in which a tester maintains linear operation, expressed by a multiple of the full scale value of the range being used.

Crest factor = Maximum value/True RMS value

For sinusoidal wave;

Crest factor = $141/100 = 1.41$

Data Hold

A function to freeze the reading on a digital display for ease of checking or recording even in a difficult-to-read situation for a tester.

Decibel: dB

A unit used to express the magnitude of change in level of electric signal or sound intensity.

A voltage ratio of 1 to 10 is equal to -20dB, 10 to 1 to 20dB, 100 to 1 to 40dB and 1000 to 1 to 60dB. A power ratio of 10 to 1 is not 20dB, but 10dB, since power(P) is proportional to the square of voltage(V).

Diode Test

A function to apply a diode or a transistor a constant current having a value needed to turn it on in order to check the diode's or the transistor's forward voltage drop and identifying the connection direction of the device.

Distortion Factor

A degree of distortion of a waveform, typically expressed as the ratio of the effective value of harmonic components to the effective value of the fundamental component.

Dual Integration Method

A technique to convert voltage into time. The first integration time (T_s) and the second integration time (T_x) are used. First, the input voltage (V_x) is integrated on a certain time interval (T_s) and then, the resulting voltage is "reverse-integrated" using a reference voltage (V_r) until it becomes 0 (zero).

The "reverse-integration time" (T_x) is proportional to input voltage (V_x). Therefore, the input voltage (V_x) can be determined by measuring T_x .

With this technique, stable measurements can be taken with high accuracy, resolution and noise rejection ratio. One particular advantage is high noise rejection ratio at 50 or 60Hz power line frequency.

Effective Measuring Range of Insulation Tester

The measuring range for which the accuracy of an insulation tester is guaranteed. There are two kinds of effective measuring ranges: the first and second effective measuring ranges.

First effective measuring range

From 1/1000 to 1/2 the maximum effective scale value

(When there is no major scale division for 1/2 the maximum effective scale value, the nearest major scale division is used.) (except for 3431)

Second effective measuring range

Scales divisions not included in the first effective measuring range

For example for a 500V/100M Ω insulation tester;

First effective measuring range: 0.1-50M Ω ($\pm 5\%$ of indicated value)

Second effective measuring range: other than above, 0 and ∞ ($\pm 10\%$ of indicated value)

Form Factor

The ratio of the effective value to the average value.

Form factor = Effective value/Average value

Frequency Response

The manner in which a device changes its output quantity, its indication for a measured quantity or its response over a range of frequencies.

AC signals to measure with a tester can be of one frequency or of a wide frequency band ranging from low to high frequencies. To measure these frequencies, it is better to use a tester having a wide frequency response range.

Hall Element

When a current-carrying conductor is placed in a magnetic field so that the direction of the magnetic field is perpendicular to the

GLOSSARY

direction of the current flow, voltage is developed in the direction perpendicular to both the magnetic field and the current flow. This is called the Hall effect and the Hall element is a device that utilizes the effect.

Almost all of the Kyoritsu AC/DC clamp meters and clamp sensors employ the Hall element.

Harmonics

Power line AC voltage from a utility company has near sinusoidal waveform of fundamental frequency with little distortion. When only a load consisting of resistors, capacitance and coils, called a linear load (its constant is fixed regardless of the amount of current flowing through it), is connected to mains supply, no distortion is introduced into the load current waveform. However, when a non-linear load, such as a semiconductor and a saturable reactor, is connected, distortion appears in the load current waveform. The current with a waveform containing distortion, or harmonic current, flows in the direction toward the low impedance side and in the process, produces voltage drop over the impedance of the current path, causing the load voltage also to contain harmonics.

Indicated Value

The value indicated by a tester for a measured quantity

Peak Hold

A function to memorize the peak value over a certain period of time.

*Response time is normally approx. 10ms.

Reading in the peak hold mode are two types. (the peak of current crest value and the peak current value multiplies by $1/\sqrt{2}$)

Peak Value

The value at a point where a waveform has the maximum amplitude.

Resolution

The minimum increments in which a tester can take measurements.

Sample Rate

Frequency at which an A/D converter circuit senses the quantity to measure: typically, twice or three times per second.

Sensitivity

The ability of a tester to respond to the quantity to measure, expressed as the ratio of a change induced in the reading to a change in the input:

$$\text{Sensitivity} = \frac{\text{Change in reading}}{\text{Change in quantity to measure}}$$

Shock Hazard

Also referred to as electric shock. When a person touches a motor that has a "leak", a path can be created from the motor frame to the hand, body and feet of the person to the floor he is standing on to allow a current to flow through it, sometimes resulting in a fatal accident.

The seriousness of a shock hazard widely varies depending on the amount and duration of the current that flows through the person's body. His constitution, age and medical condition are also variation factors, but in general, at a frequency of 50 or 60Hz, stimulus to the skin is felt at 1mA, considerable pain occurs at 5mA, pain is unbearable at 10mA, there is difficulty in releasing the "leaking" object because of intense muscle contraction at 20mA, it is considerably dangerous at 50mA and fatality is likely at 100mA. For the safety limit for a fatal current, which causes ventricular fibrillation, Professor Dalziel proposed the following equation from numbers of experiments on animals.

$$I = 165 \sqrt{t}$$

Where, I = current (mA) and t = time (sec).

From this theory, the maximum duration for a current of 165mA is 1 second.

Thermocouple

A device that uses the voltage developed by the junction of two dissimilar metals to measure temperature. One junction, called the measuring junction, is placed at the point where temperature is to be measured. The other junction, called the reference junction, is maintained at a reference temperature. The voltage developed between the two junctions varies depending on the difference between the temperatures of the two junctions and the type of thermocouple.

True RMS Value

The square root of the average of the square of a periodic waveform's instantaneous values taken over one cycle. It is also called the rms value and the most closely relates to such form of energy as force and heat.

(The effective value of an alternating current is expressed as the value of the direct current which produces the same amount of heat as the alternation current does.)

For sinusoidal wave :

$$\text{True RMS} = \text{Maximum value} \times 1/\sqrt{2} = \text{Maximum value} \times 0.707$$

When a True RMS is 100V ;

$$\text{Maximum value} = \text{True RMS} \times \sqrt{2} = 100 \times 1.41 = 141(\text{V})$$

Measurement categories


To ensure safe operation of measuring instruments, IEC 61010 establishes safety standards for various electrical environments, categorized as O to CAT IV, and called measurement categories. Higher-numbered categories correspond to electrical environments with greater momentary energy, so a measuring instrument designed for CAT III environments can endure greater momentary energy than one designed for CAT II.

O : Measuring circuits without a MEASUREMENT CATEGORY.

CAT II : Electrical circuits of equipment connected to an AC electrical outlet by a power cord.

CAT III : Primary electrical circuits of the equipment connected directly to the distribution panel, and feeders from the distribution panel to outlets.

CAT IV : The circuit from the service drop to the service entrance, and to the power meter and primary overcurrent protection device (distribution panel).

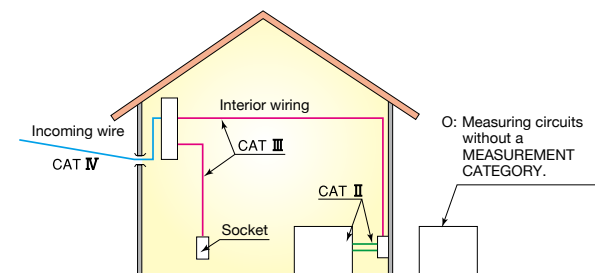

PRODUCT INDEX

1000		
1009	Digital Multimeter	16
1011	Digital Multimeter	16
1012	Digital Multimeter	16
1019R	Digital Multimeter	17
1020R	Digital Multimeter	15
1021R	Digital Multimeter	15
1030	Digital Multimeter (Pen type)	17
1051	Digital Multimeter	18
1052	Digital Multimeter	18
1061	Digital Multimeter	18
1062	Digital Multimeter	18
1109S	Analog Multimeter	16
1110	Analog Multimeter	16

2000		
2000A	Digital Multimeter	20
2001A	Digital Multimeter	20
2002PA	Digital Clamp Meter	24
2002R	Digital Clamp Meter	24
2003A	Digital Clamp Meter	27
2007R	Digital Clamp Meter	24
2009R	Digital Clamp Meter	27
2010	Digital Clamp Meter	27
2012RA	Digital Multimeter	20
2031	Digital Clamp Meter	24
2033	Digital Clamp Meter	28
2046R	Digital Clamp Meter	28
2055	Digital Clamp Meter	28
2056R	Digital Clamp Meter	28
2060BT	Clamp Power Meter	71
2062	Clamp Power Meter	71
2062BT	Clamp Power Meter	71
2117R	Digital Clamp Meter	25
2127R	Digital Clamp Meter	25
2200	Digital Clamp Meter	25
2200R	Digital Clamp Meter	25
2204R	Digital Clamp Meter	26
2210R	Digital Clamp Meter	26
2300R	Fork Current Tester	31
2413F	Leakage Clamp Meter	31
2413R	Leakage Clamp Meter	31
2431	Leakage Clamp Meter	30
2432	Leakage Clamp Meter	30
2433	Leakage Clamp Meter	30
2433R	Leakage Clamp Meter	30
2434	Leakage Clamp Meter	31
2500	DC Milliamp Clamp Meter	29
2510	DC Milliamp Clamp Logger	29

3000		
3005A	Digital Insulation/Continuity Tester	36
3007A	Digital Insulation/Continuity Tester	36
3025B	High Voltage Insulation Tester	43
3121B	High Voltage Insulation Tester	41
3122B	High Voltage Insulation Tester	41
3123A	High Voltage Insulation Tester	42
3124A	High Voltage Insulation Tester	42
3125B	High Voltage Insulation Tester	43
3127	High Voltage Insulation Tester	44
3128	High Voltage Insulation Tester	45
3131A	Analog Insulation/Continuity Tester	38
3132A	Analog Insulation/Continuity Tester	38
3161A	Analog Insulation Tester	39
3165	Analog Insulation Tester	39

3166	Analog Insulation Tester	39
3431	Analog Insulation Tester	39
3551	Digital Insulation/Continuity Tester	37
3552	Digital Insulation/Continuity Tester	37
3552BT	Digital Insulation/Continuity Tester	37

4000		
4102A	Earth Tester (Soft case model)	50
4102A-H	Earth Tester (Hard case model)	50
4105A	Earth Tester (Soft case model)	50
4105A-H	Earth Tester (Hard case model)	50
4105DL	Earth Tester (Cable reel set model)	48
4105DL-H	Earth Tester (Hard case model)	48
4105DLBT	Earth Tester (Cable reel set model)	49
4105DLBT-H	Earth Tester (Hard case model)	49
4106	Earth Tester	51
4118A	LOOP/PSC Tester	54
4140	LOOP/PFC/PSC Tester	55
4200	Earth Clamp Tester	52
4202	Earth Clamp Tester	52
4300	Simplified Earth Tester	51
4506	Intelligent Socket Tester	84

5000		
5020	AC Current/Voltage Logger	76
5050	Ior Logger	78
5202	Digital Light Meter	86
5204	Digital Light Meter	86
5204BT	Digital Light Meter	86
5406A	RCD Tester	56
5410	RCD Tester	56
5515	Infrared Thermometer	87
5711	Voltage Detector	86

6000		
6010B	Multi Function Installation Tester	60
6011A	Multi Function Installation Tester	61
6024PV	PV Insulation Earth Tester	62
6205	Portable Appliance Tester	58
6305	Power Meter	72
6315	Power Quality Analyzer	74
6514BT	Multi Function Installation Tester	64
6516	Multi Function Installation Tester	66,69
6516-EV2	6516+8602	69
6516BT	Multi Function Installation Tester	66,69
6516BT-EV2	6516BT+8602	69

7000		
7025	Test leads	39,90
7066A	Test leads	15,16,24,25,28,88,90
7073	2WAY Output cord	31,90
7082	Leads for recorder	42,90
7083	Leads for battery charging	42,90
7084	Earth and guard leads	42,90
7095A	Earth resistance test leads	50,90
7107A	Test leads	24,25,27,90
7121B	Distribution board test leads	54,56,90
7122B	Test leads	36,38,60,61,90
7123	Molded plug test lead [AU]	54,56,90
7124	Molded plug test lead [UK]	54,56,90
7125	Molded plug test lead [EU]	54,56,90
7126	Molded plug test lead [SA]	54,56,90
7127B	Simplified measurement probe	48-50,90
7128A	Test leads	56,90
7129A	Test lead with alligator clip	56,58,91

PRODUCT INDEX

7131B	Safety alligator clip [black]	91
7132A(KSLP5)	External earth probe	61,91
7133B(OMA DIEC)	Distribution board test leads	60,61,91
7139A	Test leads with remote control switch	91
7141B	Voltage test lead set	72,74,91
7146	Banana ϕ 4 adjuster plug	19,81,82,91
7148	USB cable	72,76,91
7149A	Test leads with remote control switch set	39,91
7153B	Safety test leads	91
7154B	Safety test leads	91
7155B	Safety alligator clips with fuse	91
7156B	Safety test leads with fuse	91
7157B	Safety alligator clips	84,91
7158B	Safety alligator clips for fuse	91
7159B	Safety test leads with fuse	91
7161A	Flat test prod [black]	58,91
7165A	Line probe	41-44,92
7168A	Line probe with alligator clip	41-44,92
7170	Power cord [EU]	45,72,74,92
7185	Extension cable	76,80-82,92
7187A	Mains test lead [UK]	55,66,67,92
7196B	Test leads with remote control switch	62,63,92
7217A	Test leads	38,90
7218A	Mains test lead [EU]	55,66,67,92
7219	USB cable	58,74,78,79,92
7220A	Test leads	18,92
7221A	Mains test lead [SA]	55,66,67,92
7222A	Mains test lead [AU]	55,66,67,92
7224A	Earth cord	42,44,45,92
7225A	Guard cord	42,44,45,92
7226A	Line probe	45,92
7227A	Line probe with alligator clip	45,92
7228A	Earth resistance test leads	50,65-67,92,93
7229A	Earth resistance test leads	51,92
7234	Alligator clip	15,16,19,93
7238A	Simplified measurement test leads	51,93
7240	Power cord[UK]	45,72,74,92
7243A	L-shaped probe	37,39,62,63,93
7244A	Test lead with alligator clip	62,63,93
7245A	Precision measurement cord set	50,62,63,93
7246	Distribution board test lead	55,66,67,93
7247	Distribution board test lead	55,65,93
7248	Test lead with Alligator clip and Flat test probe	51,58,93
7253	Longer line probe with alligator clip	41-44,93
7254	Longer line probe with alligator clip	45,93
7256	Output cord	24,27,29,93
7260	Test lead with remote control switch	37,39,93
7261A	Test lead with Alligator clip	37,39,93
7264	Earth cord	41,43,93
7265	Guard cord	41,43,93
7266	Earth resistance test leads	48,49,93
7267	Cable reel for Earth resistance tester (Red)	48,49,67,94
7268	Cable reel for Earth resistance tester (Yellow)	48,49,67,94
7269	Earth resistance test lead (Red)	48,49,94
7270	Earth resistance test lead (Yellow)	48,49,94
7271	Earth resistance test lead (Green)	48,49,67,94
7272	Precision measurement cord set	48,49,65,67,94
7273	Voltage test lead	78,79,94
7275	Printer cable	58,94
7276	Adapter for Extension cord	58,94
7277	Mains lead	58,94
7278	Earth cable	78,79,94
7281	Test leads with remote control switch	65-67,94
7284	Test lead with IEC connector	84,94
7290	Voltage test lead set	71,94

8000		
8016	Hook type prod	37,39,62,63
8017	Extension prod long	51,56,62,63
8017A	Extension prod long	37,39,67
8017B	Extension prod long	65
8019	Hook type prod	41-44
8029	Extension prod	45
8031	Phase indicator	87
8031F	Phase indicator	87
8032	Auxiliary earth spikes [2spikes/1set]	50,51,93
8035	Non-contact Phase Indicator	87
8041	Auxiliary earth spikes [2spikes/1set]	48,49,65-67,94
8072	CAT II Standard prod	51,62,63
8112	AC Clamp Adapter	33
8115	Clamp Sensor	15,19,33
8121	Load current Clamp Sensor	19,76,78,80,82
8122	Load current Clamp Sensor	19,76,78,80,82
8123	Load current Clamp Sensor	19,76,78,80,82
8124	Load current Clamp Sensor	72-76,78,80,81
8125	Load current Clamp Sensor	72-76,78,80,81
8126	Load current Clamp Sensor	72-76,78,80,81
8127	Load current Clamp Sensor	72-76,78,80,81
8128	Load current Clamp Sensor	72-76,78,80,81
8130	Flexible Clamp Sensor	72-76,78,80,81
8133	Flexible Clamp Sensor	72-75,78,80,81
8135	Flexible Clamp Sensor	72-76,80,81
8146	Leakage & Load current Clamp Sensor	19,74-76,78,80,82
8147	Leakage & Load current Clamp Sensor	19,74-76,78,80,82
8148	Leakage & Load current Clamp Sensor	19,74-76,78,80,82
8161	Clamp Sensor	15,33
8177	Ior Leakage current Clamp Sensor	78-80
8178	Ior Leakage current Clamp Sensor	78-80
8200-03	Cord reel [3pcs]	50,93
8200-04	Cord reel [4pcs]	51
8212-USB	USB adapter	37,44,45,51,60,62,63,65-67
8216	Temperature probe	16,28,95
8241	USB Communication set	19
8253	CAT III Standard prod	51
8259	Adapter for measurement terminal	48-50,65,67
8262	AC adapter	78,79
8264A	Battery charger[AU]	42
8266	Battery charger	42
8267	Battery charger	42
8268	Ni-MH rechargeable battery	42
8302	Adapter for recorder	43,44
8304	Resister for operation check	52
8309	Voltage sensor	76,80
8312	Power supply adapter	72,73,75,80
8320	AC adapter	29,76,80
8324	Adapter for recorder	41,42
8326-02	SD card [2GB]	72,74,75,78,79
8327EU	Power adapter 15V/1A	44
8329	Power supply adapter	78-80
8343	Signal source for Intelligent Socket Tester	84
8405	Temperature probe	19,95
8406	Temperature probe	19,95
8407	Temperature probe	19,95
8408	Temperature probe	19,95
8601	EVSE Adapter	65,68,69
8602	EVSE Adapter	65,68,69
8603	TYPE1 to TYPE2 conversion adapter	68
8901	Fuse [0.5A/250V]	16,95
8918	Fuse [0.8A/600V]	16,95
8919	Fuse [10A/600V]	15,16,95
8923	Fuse [0.5A/600V]	16,36,38,51,60,61,65-67,87,95

PRODUCT INDEX

8926	Fuse [440mA/1000V]	18,95
8927	Fuse [10A/1000V]	18,95
8928	Fuse [10A/250V]	58,95
8930	Fuse [10A/250V]	68,95

9000

9029	Carrying case	87,95
9041	Cord case	91,95
9074	Cord case	36,38,39,96
9079	Carrying case	24,25,96
9084	Soft case	50,65-67,96
9090	Carrying case	24,28,30,96
9092	Cord case	60,61,96
9094	Carrying case	24,27,28,31,80-82,87,96
9095	Carrying case	16,27,33,80-82,96
9096	Carrying case	29,84,87,96
9097	Carrying case	15,30,31,96
9103	Carrying case	16,96
9105	Carrying case	88,96
9107	Soft case	20,96
9113	Carrying case	31,96
9118	Carrying case	76,96
9121	Shoulder strap	36-39,48-51,54,56,58,60,61
9123	Shoulder strap	39
9125	Carrying case	51,72,74,78,79,96
9130	Carrying case	17,97
9132	Carrying case with magnet	72,73,75,80,97
9135	Carrying case	76,80,97
9142	Carrying case	50,65-67,93,97
9147	Cord case	54,56,97
9151	Shoulder strap	65-67
9152	Carrying case	87,97
9154	Carrying case	19,97
9156A	Soft case with shoulder strap	55,62,63,97
9158	Carrying case [Hard]	42,97
9160	Carrying case	25,97
9161	Carrying case	51,84,97
9164	Carrying case [Hard]	50,97
9165	Carrying case [Hard]	50,97
9166	Carrying case [Hard]	52,97
9167	Carrying case [Hard]	52,97
9168	Carrying case	16,98
9171	Carrying case [Hard]	44,98
9173	Carrying case	37,39,98
9174	Carrying case	26,98
9176	Carrying case [Hard]	42,98
9182	Carrying case [Hard]	41,98
9183	Carrying case [Hard]	41,98
9186A	Carrying case	37,39,98
9187	Cord case	37,39,98
9188	Hard case	17,98
9189	Magnet hanger strap	15
9190	Carrying case	48,49,98
9191	Carrying case[Hard]	48,49,98
9192	Carrying case for cord reels	48,49,67,94,98
9193	Carrying case	58,98
9195	Carrying case	86,98
9197	Carrying case[Hard]	49,99
9198	Carrying case	71,99
9199	Shoulder pad	65-67
9202	Carrying case	68,99
9203	Carrying case[Hard]	43,99
9204	Carrying case[Hard]	43,99
KAMP10	Test lead with IEC connector	60,61,84,94
KT170	Voltage Tester	89

KT171	Voltage Tester	89
KT200	Digital Clamp Meter	88
KT203	Digital Clamp Meter	88
KTA01	4mm metal tips [2pcs/set]	89
KTA02	4mm rubber caps [2pcs/set]	89

QUALITY CONTROL CONCEPT

Kyoritsu started early an effort to establish system that ensures traceability to the national standards in order to produce reliable instruments as well as instruments that can assure reliability of other equipment and installations.

When traceability is in place, measurements taken with an instrument any time and anywhere in any situation can be related to the appropriate national measurement standards through a clear and unbroken chain of comparisons.

For example, in terms of measurement defined by JIS (Japanese Industrial Standards), traceability is specified as a condition in which a calibration path is established from instruments produced or in-house standards to higher level standards to the national standards. Kyoritsu currently has a system in place as shown in the figure below.


Our calibrator (standard) is calibrated at Japan Electric Meters Inspection Corporation (JEMIC), Japan Quality Assurance Organization (JQA) and Fluke Japan who perform calibration based on the units established and maintained by National Institute of Advanced Industrial Science and Technology (AIST). The standard is used as the in-house standard to calibrate all the test and measuring equipments which are used in-house.

Voltage : Precision calibrators are used as in-house DC and AC voltage standards.

Current : DC or AC current is converted to a voltage by a standard resistor, and the voltage is calibrated with a precision digital multimeter.

Resistance : Calibration resistors are calibrated with a DC standard current generator and the precision digital multimeter.

Calibration System for Electrical Measuring Instruments

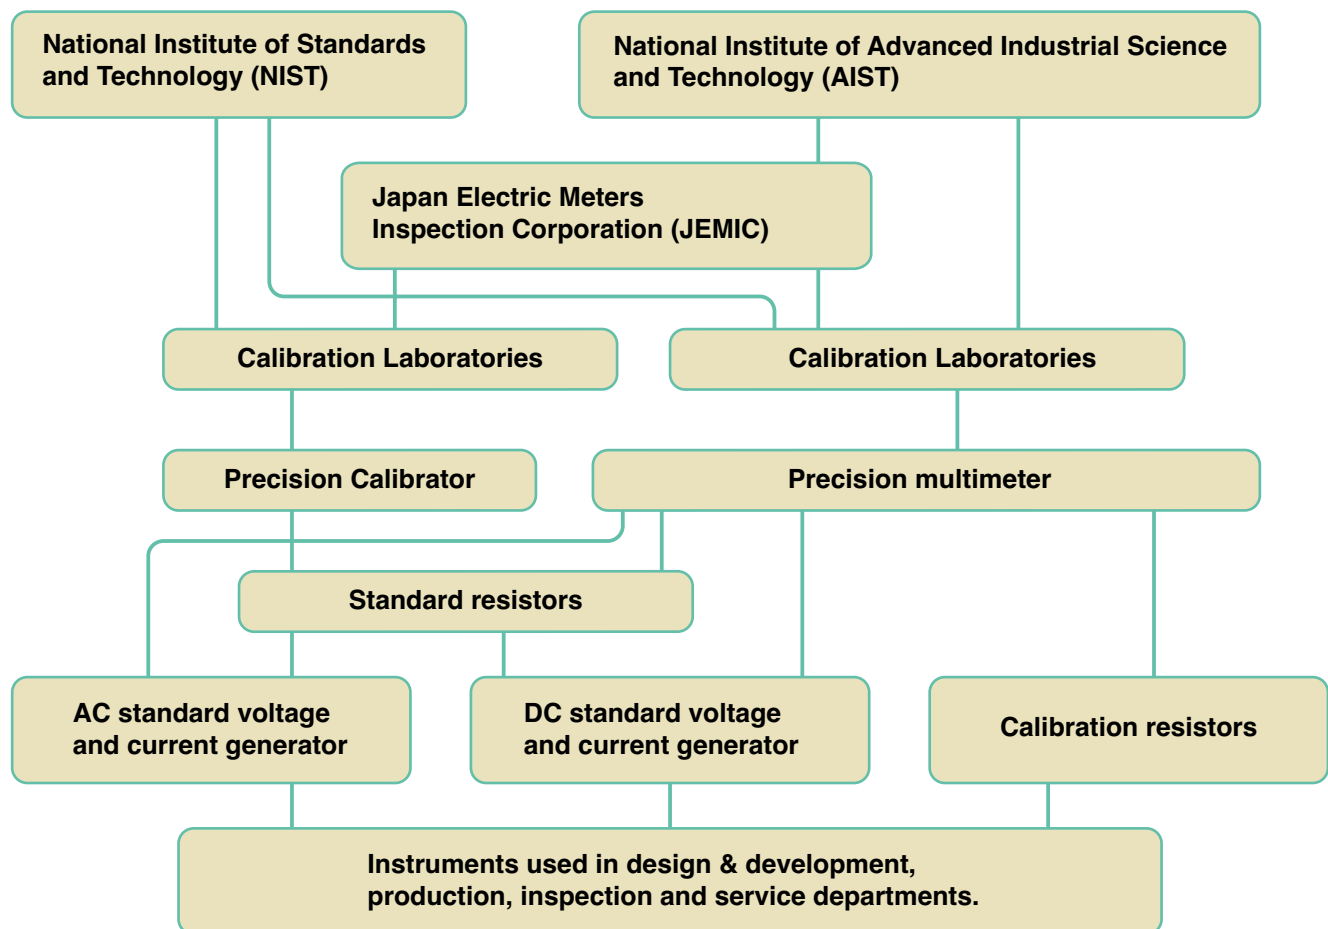

CE Marking: signifies conformance to
EMC directive (2014/30/EU)
LVD directive (2014/35/EU)
RoHS directive (2011/65/EU + (EU)2015/863)

Trademarks and registered trademarks

The following registered trademarks and trademarks of other companies, as well as names of companies, products and services, service marks, logos, etc., appearing in this website are trademarks or registered trademarks of the Company or other companies. In the text and charts, "TM" and "®" may be omitted.

- Bluetooth® is a trademark or registered trademark of Bluetooth SIG, Inc.
- Google, the Google Play logo, Android™, the Android™ logo, YouTube and the YouTube logo are trademarks or registered trademarks of Google LLC.
- Apple and the Apple logo are trademarks of Apple Inc.
- App Store is a service mark of Apple Inc.
- iOS is a trademark or registered trademark of Cisco Technology, Inc. in the United States and other countries.
- Windows® and Microsoft Excel are registered trademarks of Microsoft Corporation.
- Facebook is a registered trademark of Facebook, Inc.
- QR Code is a trademark or a registered trademark of DENSO WAVE INC.



- Headquarter
- Factory
- Affiliates

KYORITSU GLOBAL NETWORK

● KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

2-5-20, Nakane Meguro-ku, Tokyo,
152-0031 Japan
Phone: +81-3-3723-0131
FAX: +81-3-3723-0152

● EHIME FACTORY

480 Sakado, Uwa-cho, Seiyo City, Ehime,
797-0045 Japan



● KEW (THAILAND) LIMITED

Navanakorn Industrial Estate 60/48, Moo 19,
Klongluang, Pathumthani, 12120 Thailand
Phone: +66-2-529-0542
FAX: +66-2-529-0541

● KYORITSU INSTRUMENTS ASIA PTE. LTD.

4008 Ang Mo Kio Ave 10, #02-20/21,
Techolace-1, Singapore 569625
Phone: +65-6336-3398
FAX: +65-6336-1696

● KEW EUROPE OFFICE

Viale Brianza 181, 20092 Cinisello Balsamo,
Milano, Italy
Phone: +39-34-74149005

● KEWTECH CORPORATION LIMITED

Suite 3 Halfpenny Court, Halfpenny Lane,
Sunningdale, Berkshire, SL5 0EF, England
Phone: +44-3456-461404

● KYORITSU SHANGHAI TRADING COMPANY LIMITED

Room 1303, No. 58 Yan'an East Road,
Huangpu District, Shanghai 200002, China
Phone: +86-21-6321-8899
FAX: +86-21-5015-2015
URL: <http://www.kew-ltd.com.cn>
E-mail: info@kew-ltd.com.cn




Official Website
www.kew-ltd.co.jp




Facebook




Instagram



 **YouTube**




Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

■ For inquiries or orders :



In consideration of the environment, VEGETABLE OIL INK and recycled paper were used in this publication.

● The contents of this catalog are subject to change without notice.

GC_25_1_0_Dec24_AD_en